



John L. Jackson, Trustee (Bruce Moia) requests a Small Scale Comprehensive Plan Amendment from NC to CC. (18PZ00160) (District 1)

SUBJECT:

John L. Jackson, Trustee (Bruce Moia) requests a Small Scale Comprehensive Plan Amendment from NC (Neighborhood Commercial) to CC (Community Commercial). The property is 3.28 acres, located on the north side of State Road 46, approximately 0.2 miles west of the Interstate 95 interchange. (No assigned address. In the Mims area.) (18PZ00160) (District 1)

FISCAL IMPACT:

None.

DEPT/OFFICE:

Planning and Development

REQUESTED ACTION:

It is requested that the Board of County Commissioner conduct a public hearing to consider a Small Scale Plan Amendment to change the Future Land Use designation from NC (Neighborhood Commercial) to CC (Community Commercial).

SUMMARY EXPLANATION and BACKGROUND:

The applicant is seeking to amend the Future Land Use (FLU) designation from Neighborhood Commercial (NC) to Community Commercial (CC) on a 3.28 acre portion of a greater 134.36 acre parcel of land. The subject property is a piece of a greater parcel which is vacant with four (4) different FLU designations of CC, NC, Residential 2 (RES 2) and Public Conservation (PUB-CONS). The 3.28 acres will be combined with the approximately 18.55 acres of CC to the East for the intended purposes of developing a truck stop which would include a convenience store with gas pumps, fast food drive through restaurants, a tire store, and a 120-room hotel.

The subject parcel is located on the north side of S.R. 46, approximately 100 feet west of I-95. Only one .92-acre parcel in the northwest quadrant of the intersection has been developed with a convenience store with gas pumps. To the south, across S.R. 46, lie several parcels with the CC FLU designation, totaling 37.67 acres. Only two small parcels have been developed, including a retail store on 1.41 acres, and a convenience store with gas pumps on 1.15 acres, while the majority of CC land in the southwest corner of the I-95 and S.R. 46 intersection remains vacant.

The applicant has provided a Traffic Impact Study (TIS) that recommends the installation of a traffic signal control at the S.R. 46 and Carpenter Road intersection. The TIS also recommends the installation of a left-turn lane and a right-turn lane on S.R. 46 at Carpenter Road. A signal at this location does not meet traditional distance separation standards from the signal at the I-95 on/off ramps. Coordination with Florida Department of Transportation on the appropriate location for signalized access, turn lane, and other improvements would typically be reviewed during site development.

The Board may wish to consider whether the request for an expansion of CC FLU is compatible with the surrounding NC, CC, RES 2, and PUB-CONS. The Board may also consider whether the roadway improvements necessary to accommodate the newly proposed uses warrant further review prior to Board action.

This request is accompanied by a companion proposal for a change of zoning classification from General Use (GU) and General Retail Commercial (BU-1) to Retail, Warehousing, and Wholesale Commercial (BU-2).

On February 11, 2019, the Local Planning Agency heard the request and unanimously recommended approval.

ATTACHMENTS:

Description

- Administrative Policies
- Staff Comments
- GIS Maps
- Concept Plan
- Traffic Signal Warrant Study
- Traffic Impact Study
- Planning and Zoning Minutes
- Response to Comments
- D Correspondence



FLORIDA'S SPACE COAST

Tammy Rowe, Clerk to the Board, 400 South Street • P.O. Box 999, Titusville, Florida 32781-0999

Telephone: (321) 637-2001 Fax: (321) 264-6972 Tammy.Rowe@brevardclerk.us



March 8, 2019

MEMORANDUM

TO: Tae

Tad Calkins, Planning and Development Director

RE:

Item H.10., Ordinance Adopting Small Scale Plan Amendment 19S.04

The Board of County Commissioners, in regular session on March 7, 2019, adopted Ordinance No. 19-05, setting forth Small Scale Plan Amendment 19S.04, to change the Future Land Use designation from Neighborhood Commercial (NC) to Community Commercial (CC). Enclosed is a fully-executed Ordinance.

Your continued cooperation is always appreciated.

Sincerely,

BOARD OF COUNTY COMMISSIONERS SCOTT ELLIS, CLERK

Tammy Rowe, Deputy Clerk

Encl. (1)



RON DESANTIS
Governor

LAUREL M. LEESecretary of State

March 8, 2019

Honorable Scott Ellis Clerk Board of County Commissioners Brevard County Post Office Box 999 Titusville, Florida 32781-0999

Attention: Deborah Thomas

Dear Mr. Ellis:

Pursuant to the provisions of Section 125.66, Florida Statutes, this will acknowledge receipt of your electronic copy of Brevard County Ordinance No. 19-05, which was filed in this office on March 8, 2019.

Sincerely,

Ernest L. Reddick Program Administrator

ELR/lb

ORDINANCE NO. 19-05

AN ORDINANCE AMENDING ARTICLE III, CHAPTER 62, OF THE CODE OF ORDINANCES OF BREVARD COUNTY, ENTITLED "THE 1988 COMPREHENSIVE PLAN", SETTING FORTH THE FOURTH SMALL SCALE PLAN AMENDMENT OF 2019, 19S.04, TO THE FUTURE LAND USE MAP OF THE COMPREHENSIVE PLAN; AMENDING SECTION 62-501 ENTITLED CONTENTS OF THE PLAN; SPECIFICALLY AMENDING SECTION 62-501, PART XVI (E), ENTITLED THE FUTURE LAND USE MAP APPENDIX; AND PROVISIONS WHICH REQUIRE AMENDMENT TO MAINTAIN INTERNAL CONSISTENCY WITH THESE AMENDMENTS; PROVIDING LEGAL STATUS; PROVIDING A SEVERABILITY CLAUSE; AND PROVIDING AN EFFECTIVE DATE.

WHEREAS, Section 163.3161 et. seq., Florida Statutes (1987) established the Local Government Comprehensive Planning and Land Development Regulation Act; and

WHEREAS, Section 163.3167, Florida Statutes, requires each County in the State of Florida to prepare and adopt a Comprehensive Plan as scheduled by the Department of Economic Opportunity; and

WHEREAS, on September 8, 1988, the Board of County Commissioners of Brevard County, Florida, approved Ordinance No. 88-27, adopting the 1988 Brevard County Comprehensive Plan, hereafter referred to as the 1988 Plan; and

WHEREAS, Sections 163.3184 and 163.3187, and 163.3189, Florida Statutes, established the process for the amendment of comprehensive plans pursuant to which Brevard County has established procedures for amending the 1988 Plan; and

WHEREAS, Brevard County initiated amendments and accepted application for small scale amendments to the Comprehensive Plan for adoption in calendar year 2019 as Plan Amendment 19S.04; and

WHEREAS, Brevard County established Technical Advisory Groups consisting of County technical employees grouped according to their operational relationship to the subject of a plan element or sub-element being prepared or amended, and these Technical Advisory Groups have provided technical expertise for the Amendment 19S.04; and

WHEREAS, the Board of County Commissioners of Brevard County, Florida, have provided for the broad dissemination of proposals and alternatives, opportunity for written comments, public hearings after due public notice, provisions for open discussion, communication programs and consideration of and response to public comments concerning the provisions contained in the 1988 Plan and amendments thereto; and

Officially filed with the Secretary of State on March 8, 2019.

WHEREAS, Section 62-181, Brevard County Code designated the Brevard County Planning and Zoning Board as the Local Planning Agency for the unincorporated areas of Brevard County, Florida, and set forth the duties and responsibilities of said local planning agency; and

WHEREAS, on February 11, 2019, the Brevard County Local Planning Agency held a duly noticed public hearing on Plan Amendment 19S.04, and considered the findings and advice of the Technical Advisory Groups, and all interested parties submitting comments; and

WHEREAS, on March 7, 2019, the Brevard County Board of County Commissioners held a duly noticed public hearing, and considered the findings and recommendations of the Technical Advisory Group, and all interested parties submitting written or oral comments, and the recommendations of the Local Planning Agency, and upon thorough and complete consideration and deliberation, approved for adoption Plan Amendment 19S.04; and

WHEREAS, Plan Amendment 19S.04 adopted by this Ordinance comply with the requirements of the Local Government Comprehensive Planning and Land Development Regulation Act; and

WHEREAS, Plan Amendment 19S.04 adopted by this Ordinance is based upon findings of fact as included in data and analysis.

NOW, THEREFORE, BE IT ORDAINED BY THE BOARD OF COUNTY COMMISSIONERS OF BREVARD COUNTY, FLORIDA, as follows:

- Section 1. Authority. This ordinance is adopted in compliance with, and pursuant to the Local Government Comprehensive Planning and Land Development Regulations Act, Sections 163.3184 and 163.3187, Florida Statutes.
- Section 2. Purpose and Intent. It is hereby declared to be the purpose and intent of this Ordinance to clarify, expand, correct, update, modify and otherwise further the provisions of the 1988 Brevard County Comprehensive Plan.
- Section 3. Adoption of Comprehensive Plan Amendments. Pursuant to Plan Amendment 19S.04 to the 1988 Comprehensive Plan, Article III, Chapter 62-504, Brevard County Code, the 1988 Brevard County Comprehensive Plan is hereby amended based on documentation shown in Exhibit A and as specifically shown in Exhibit B. Exhibits A and B are hereby incorporated into and made part of this Ordinance.

Section 4. Legal Status of the Plan Amendments. After and from the effective date of this Ordinance, the plan amendment, Plan Amendment 19S.04, shall amend the 1988 Comprehensive Plan and become part of that plan and the plan amendment shall retain the legal status of the 1988 Brevard County Comprehensive Plan established in Chapter 62-504 of the Code of Laws and Ordinances of Brevard County, Florida, as amended.

Section 5. Severability. If any section, paragraph, subdivision, clause, sentence or provision of this Ordinance shall be adjudged by any court of competent jurisdiction to be invalid, such judgment shall not affect, impair, invalidate, or nullify the remainder of this Ordinance, but the effect thereof shall be confined to the section, paragraph, subdivision, clause, sentence or provision immediately involved in the controversy in which such judgment or decree shall be rendered.

Section 6. Effective Date. The effective date of this small scale plan amendment shall be 31 days after adoption, unless the amendment is challenged pursuant to Section 163.3187(3), Florida Statutes. If challenged, the effective date of this amendment shall be the date a final order is issued by the Department of Community Affairs, or the Administration Commission, finding the amendment in compliance with Section 163.3184, Florida Statues. A certified copy of the ordinance shall be filed with the Office of the Secretary of State, State of Florida, within ten days of enactment.

DONE AND ADOPTED in regular session, this 7 day of March , 2019

ATTEST:

Scott Ellis, Clerk

BOARD OF COUNTY COMMISSIONERS OF BREVARD COUNTY, FLORIDA

Kristine Isnardi, Chair

As approved by the Board on March 7, 2019.

EXHIBIT A

19S.04 SMALL SCALE

COMPREHENSIVE PLAN AMENDMENT

Contents

1. Proposed Future Land Use Map

PROPOSED FUTURE LAND USE MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

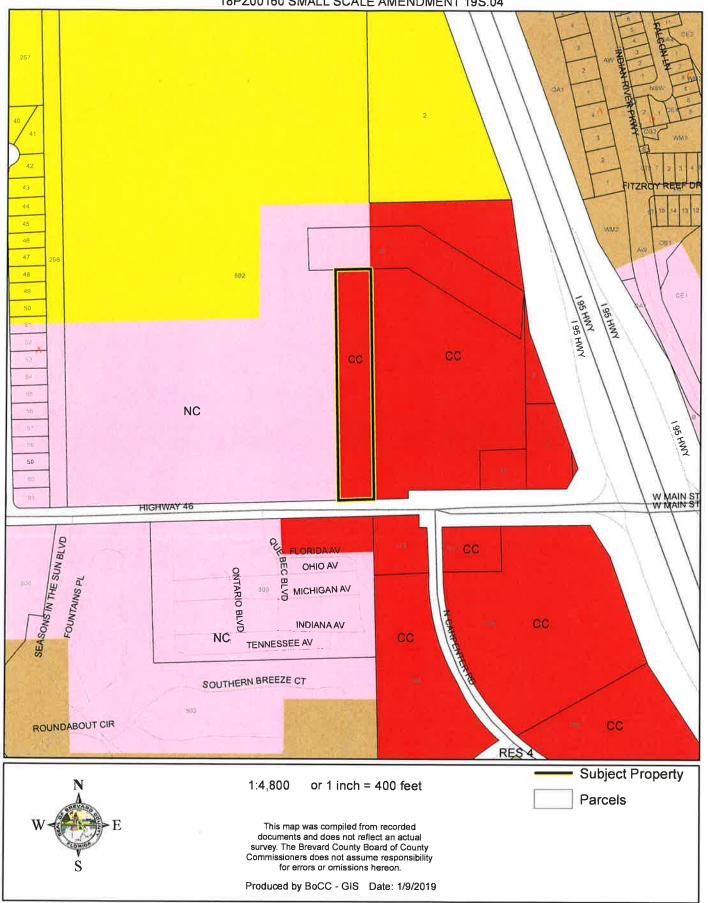


EXHIBIT B

FINDINGS OF FACT

Contents

1. Legal Description

AD#3346776. 1/24/2019

NOTICE Is hereby given pursuant to Chapters 125 & 163. FLORIDA STATUTES, and Chapter 62. Article VI of the Brevard County Code. that the Brevard County Planning and Zoning Board (Local Planning Agency) and the Board of County Commissioners will consider the following requests on MONDAY, FEBRUARY 11, 2019, and THURSDAY, MARCH 7, 2019. Items 1 and 2 are North Merritt Island Dependent Special District Board Items, DISTRICT 1 3. (18P20014S) — MANDA LAUGIE TAYLOR - requests a change of zoning classification from GU (General Use) to AU (Agricultural Residential), on property described as Tract 8, Block 16, Canaveral Groves Unrecorded Subdivision, as filed in Survey Book 2, Page 55, of the Public Records of Brevard County, Florida Section 33, Township 23, Range 35, (2.38 acres) Located on the east side of Florida Palm Ave, approx 0.18 miles north of Areca Palm St. (5125 Florida Palm Ave, Cocoa) 4. (18P200147) WLL LIAM EMMONS AND LAURIE TURNER request a change of zoning classification from RU-1-7. (Single-Family Residential) to SR (Suburban Residential), on property described as Tax Parcel 501, as recorded in ORB 8178, Page 868, of the Public Records of Brevard County, Florida. Section 17, Township 21, Range 35. (0.81 acres) Located on the east side of N. Singleton Ave, approx 165 ft. north of Parker St. (2295 N. Singleton Ave, Mims) S. (18P200159) JAMES AND LENNIFER MUTTER — request a change of zoning classification from GU (General Use) and RU-1-13 (Single-Family Residential) to BU-1-A (Restricted Neighborhood Commercial), on property described as Lot 17, Block 1, Spruce HIIB Subdivision, as recorded in ORB 8249, Pages 2609 — 2610. of the Public Records of Brevard County, Florida, extending 235 ft. from east to west along the north property line, and c278 ft from east to west of Holder Rd. (4218 W. Main St., Mims) 6, (18P200153) JOSEPH BRANDON AND NIKKI THOMAS request a Small Scale Comprehensive Plan Amendment 195.03 from RES 1 (Residential 1) and Res 100.00 ft. Res 100.00 ft. Res 100.00 ft. Re

of the Public Records of Brevard County, Florida; and the east 662.87 ft of Lot 149 in Section 15, Cocoa-Indian River Properties, according to the plat thereof, as recorded in Plat Book 5, Page 7, of the Public Records of Brevard County, Florida Section 15, Township 23, Range 35, 613.27 acres). Located on the west side of Grissom Pkwy, between Cinnamon Fern Blvd. and Ranch Rd. (No assigned address; in the Cocoa area.) DISTRICT 2 9, (18P20159). BARBARA J AND JOSEPH J. TULSKIE, JR.— (Rodney Honeycutt) request removal of an existing BDP (Binding Development Plan), and a CUP (Conditional Use Permit) for a Temporary. Security Trailer, on property described as Lot. Block D. Merritt Winter Homes Development Subdivision, as recorded in ORB 8210, Pages 319—320, of the Public Records of Brevard County, Florida, and Lot. 3, Block D. Merritt Winter Homes Development Subdivision, as recorded in ORB 8203, Pages 2720—2721, of the Public Records of Brevard County, Florida, and Lot. 3, Block D. Merritt Winter Homes Development Subdivision, as recorded in ORB 8203, Pages 2720—2721, of the Public Records of Brevard County, Florida, and Lot. 3, Block D. Merritt Winter Homes Development Subdivision, as recorded in ORB 8203, Pages 2720—2721, of the Public Records of Brevard County, Florida, Section 35, Township 24, Range 36, (155 acres) Located on the southeast corner of Tangerine Ave. and N. Tropical Trail, Lot. 1 = 140 N. Tropical Trail, Merritt Island; Lot. 3 = No assigned address) 10, (18P200160) JOHN L. JACKSON, TRUSTEE — (Bruce Moia) requests a Small Scale Comprehensive Plan Amendment, 195,04, to change the Future Land Use designation from NC (Neighborhood Commercial) and CC (Community Commercial) to all CC, on property described as follows: Begin a parcel of land located in Section 13, Township 215, Range 34E, Brevard County, Florida, and being a portion of a parcel of land conveyed by deed to John L. Jackson, Jr. Trustee et al. as recorded in Deed Book 6133, Page 2745, of the Public Records of Brevard County, Florida, Being

section S88deg33'57"W, a distance of 2,344.11 ft, thence leaving said quarter section line N01deg26'03"W. a distance of 59.52 ft. to a point on the northerly right-of-way of S.R. 46 as shown on the right-of-way of S.R. 46 as shown on the right-of-way map for S.R. 9 (Interstate 95). Brevard Courhy, Section 70225 Fed Project Number 0953-11-1, said point being the point of beginning and being more particularly described as follows: thence along the north right-of-way of 5.R. 46 the following three (3) courses: 1, S88deg33'22"W, a distance of 14.08 ft. 2, 15.01deg26'38"E, a distance of 26.02 ft., 3.1) \$88deg32'35"W, a distance of 346.42 ft. thence leaving the right-of-way of S.R. 46 N00deg26'59"W, a distance of 19.48.8 ft, to the south line of FDOT drainage pond property, thence along the south line of said FDOT property the following two (2) courses: 1). N88deg23'24"E, a distance of 26.02 ft., 2.1 S05deg26'35"E, a distance of 36.02 ft. thence S00deg285'92"E, a distance of 352.21 ft. thence S00deg285'92"E, a distance of 352.21 ft. thence S00deg285'95"E, a distance of 352.21 ft. thence S00deg285'95"E, a distance of 355.76 ft. to the point of beginning, Less and except that portion which is already CC (Community Commercial), 3.28 acres). Located on the north side of S.R. 46 interchange. (No assigned address. In the Mims area.). The following ordinance will also be considered in conjunction with the Small Scale Plan Amendment; 195.04. an ordinance amendment to maintain internal consistency with these amendments; providing section 62-501, Part XI, entitled Future Land Use Blement and Future Land Use Map Series, and providing a severability clause and providing an effective date 11. (18P200161) JOHN. L. JACKSON, TRUSTEE — (Bruce Moia) requests a change of zoning classification from GU (General Use), Bul.1 (General Retail Commercial), and Bul-2 (Retail). Warehousing and Wholesale Commercial) to all Bul-2, on property described as follows: Begin at the 8st ¼ corner of Section 13. thence leaving said Wa section line N01deg

way of S.R. 46 N00deg26'99' W, a distance of 1,034.89 ft. to the south line of Florida Department of Transportation (FDOT) drainage pond property, thence along the south line of said FDOT property the following two (2) courses: 1.) N88deg23'24"E, a distance of 287.39 ft. 2.) SS8deg33'46"E, a distance of 618.08 ft. to the east line of described property, thence S00deg58'29"E, a distance of 317 ft.: thence S80deg05'30"W, a distance of 352.21 ft.; thence S00deg26'59"E, a distance of 355.76 ft., to the point of beginning AND further described as follows: Being a parcel of land located in Section 13. Township 215, Range 34 E, Brevard County, Florida, and being a portion of a parcel of land conveyed by deed to John L. Jackson, ir., Trustee, et al, as recorded in Deed Book 6132, Page 2745, of the Public Records of Brevard County, Florida, being more particularly described as follows: Begin at the east 16 course of Section 13, thence westerly along the 18 section S88deg33'57"W, a distance of 2,188.63 ft. thence leaving said 18 section line N01deg26'03"W, a distance of 59.54 ft. to a point on the northerly right-of-way of S.R. 46 as shown on the right-of-way map for S.R. 9 (195). Brevard County, Section 70.25. FED Project No. 0953-11-1, sald point being the point of beginning and being more particularly described as follows: Thence along the north-right-of-way of S.R. 46 S88deg33'22"W, a distance of 155.48 ft. thence leaving the right-of-way of S.R. 46 S88deg33'22"W, a distance of 155.48 ft. thence leaving the right-of-way of S.R. 46 S88deg33'22"W, a distance of 152.42 ft. to the north line of property owned by East Coast Petro, Inc., thence along said north line south of the west line of said property; thence leaving said north line south said of S.R. 46 interchange (No assigned address. In the Mims area.) 12 (189200162). SREVARD COUNTY BOARD OF COUNTY COMMISSIONERS – Time Lawry) requests a change of zoning classification from 8U-1 (General Retail Commercial) and U (Light Industrial) to Signal property the property of

proceedings is made, at his own expense, which record includes testimony and evidence upon which any such appeal is to be based. Final report of the above referenced agenda will be heard at this meeting. In accordance with the Americans with Disabilities Act and Section 286.26. Florida Statutes: persons with disabilities needing special accommodations to participate in this proceeding should contact the Planning & Development. Department no later than 48 hours prior to the meeting at 633-2069 for assistance. Brevard County Planning & Development Department, Per Tad Calkins, Planning and Development Director. By: Jennifer Jones Special Projects Coordinator II.



ADMINISTRATIVE POLICIES OF THE FUTURE LAND USE ELEMENT

Administrative Policies in the Future Land Use Element establish the expertise of staff with regard to zoning and land use issues and set forth criteria when considering a rezoning action or request for Conditional Use Permit, as follows:

Administrative Policy 1

The Brevard County zoning official, planners and the director of the planning and development staff, however designated, are recognized as expert witnesses for the purposes of Comprehensive Plan amendments as well as zoning, conditional use, special exception and variance applications.

Administrative Policy 2

Upon Board request, members of the Brevard County planning and development staff shall be required to present written analysis and a recommendation, which shall constitute an expert opinion, on all applications for zoning, conditional uses, comprehensive plan appeals, vested rights or other applications for development approval that come before the Board of County Commissioners for quasi-judicial review and action. The Board may table an item if additional time is required to obtain the analysis requested or to hire an expert witness if the Board deems such action appropriate. Staff input may include the following:

Criteria:

- A. Staff shall analyze an application for consistency or compliance with comprehensive plan policies, zoning approval criteria and other applicable written standards.
- B. Staff shall conduct site visits of property which are the subject of analysis and recommendation. As part of the site visit, the staff shall take a videotape or photographs where helpful to the analysis and conduct an inventory of surrounding existing uses. Aerial photographs shall also be used where they would aid in an understanding of the issues of the case.
- C. In cases where staff analysis is required, both the applicant and the staff shall present proposed findings of fact for consideration by the Board.
- D. For re-zoning applications where a specific use has not been proposed, the worst case adverse impacts of potential uses available under the applicable land use classification shall be evaluated by the staff.

Administrative Policy 3

Compatibility with existing or proposed land uses shall be a factor in determining where a rezoning or any application involving a specific proposed use is being considered. Compatibility shall be evaluated by considering the following factors, at a minimum:

Criteria:

A. Whether the proposed use(s) would have hours of operation, lighting, odor, noise levels, traffic, or site activity that would significantly diminish the enjoyment of, safety or quality of life in

existing neighborhoods within the area which could foreseeably be affected by the proposed use:

- B. Whether the proposed use(s) would cause a material reduction (five per cent or more) in the value of existing abutting lands or approved development.
- C. Whether the proposed use(s) is/are consistent with an emerging or existing pattern of surrounding development as determined through an analysis of:
 - 1. historical land use patterns;
 - 2. actual development over the immediately preceding three years; and
 - 3. development approved within the past three years but not yet constructed.
- D. Whether the proposed use(s) would result in a material violation of relevant policies in any elements of the Comprehensive Plan.

Administrative Policy 4

Character of a neighborhood or area shall be a factor for consideration whenever a rezoning or any application involving a specific proposed use is reviewed. The character of the area must not be materially or adversely affected by the proposed rezoning or land use application. In evaluating the character of an area, the following factors shall be considered:

Criteria:

- A. The proposed use must not materially and adversely impact an established residential neighborhood by introducing types or intensity of traffic (including but not limited to volume, time of day of traffic activity, type of vehicles, etc.), parking, trip generation, commercial activity or industrial activity that is not already present within the identified boundaries of the neighborhood.
- B. In determining whether an established residential neighborhood exists, the following factors must be present:
 - 1. The area must have clearly established boundaries, such as roads, open spaces, rivers, lakes, lagoons, or similar features.
 - 2. Sporadic or occasional neighborhood commercial uses shall not preclude the existence of an existing residential neighborhood, particularly if the commercial use is non-conforming or pre-dates the surrounding residential use.
 - 3. An area shall be presumed not to be primarily residential but shall be deemed transitional where multiple commercial, industrial or other non-residential uses have been applied for and approved during the previous five (5) years.

Administrative Policy 5

In addition to the factors specified in Administrative Policies 2, 3, and 4, in reviewing a rezoning, conditional use permit or other application for development approval, the impact of the proposed use or uses on transportation facilities either serving the site or impacted by the use(s) shall be considered. In evaluating whether substantial and adverse transportation impacts are likely to result if an application is approved, the staff shall consider the following criteria:

Criteria:

- A. Whether adopted levels of service will be compromised;
- B. Whether the physical quality of the existing road system that will serve the proposed use(s) is sufficient to support the use(s) without significant deterioration;
- C. Whether the surrounding existing road system is of sufficient width and construction quality to serve the proposed use(s) without the need for substantial public improvements;
- D. Whether the surrounding existing road system is of such width and construction quality that the proposed use(s) would realistically pose a potential for material danger to public safety in the surrounding area;
- E. Whether the proposed use(s) would be likely to result in such a material and adverse change in traffic capacity of a road or roads in the surrounding area such that either design capacities would be significantly exceeded or a de facto change in functional classification would result;
- F. Whether the proposed use(s) would cause such material and adverse changes in the types of traffic that would be generated on the surrounding road system, that physical deterioration of the surrounding road system would be likely;
- G. Whether projected traffic impacts of the proposed use(s) would materially and adversely impact the safety or welfare of residents in existing residential neighborhoods.

Administrative Policy 6

The use(s) proposed under the rezoning, conditional use or other application for development approval must be consistent with (a) all written land development policies set forth in these administrative policies; and (b) the future land use element, coastal management element, conservation element, potable water element, sanitary sewer element, solid waste management element, capital improvements element, recreation and open space element, surface water element and transportation elements of the comprehensive plan.

Administrative Policy 7

Proposed use(s) shall not cause or substantially aggravate any (a) substantial drainage problem on surrounding properties; or (b) significant, adverse and unmitigatable impact on significant natural wetlands, water bodies or habitat for listed species.

Administrative Policy 8

These policies, the staff analysis based upon these policies and the applicant's written analysis, if any, shall be incorporated into the record of every quasi-judicial review application for development approval presented to the Board including rezoning, conditional use permits and vested rights determinations."

Section 62-1151 (c) of the Code of Ordinances of Brevard County directs "The planning and zoning board shall recommend to the board of county commissioners the denial or approval of each application for amendment to the official zoning maps based upon a consideration of the following factors:

- (1) The character of the land use of the property surrounding the property being considered.
- (2) The change in conditions of the land use of the property being considered and the surrounding property since the establishment of the current applicable zoning classification, special use or conditional use.
- (3) The impact of the proposed zoning classification or conditional use on available and projected traffic patterns, water and sewer systems, other public facilities and utilities and the established character of the surrounding property.
- (4) The compatibility of the proposed zoning classification or conditional use with existing land use plans for the affected area.
- (5) The appropriateness of the proposed zoning classification or conditional use based upon a consideration of the applicable provisions and conditions contained in this article and other applicable laws, ordinances and regulations relating to zoning and land use regulations and based upon a consideration of the public health, safety and welfare.

The minutes of the planning and zoning board shall specify the reasons for the recommendation of approval or denial of each application."

CONDITIONAL USE PERMITS (CUPs)

In addition to the specific requirements for each Conditional Use Permit (CUP), Section 62-1901 provides that the following approval procedure and general standards of review are to be applied to all CUP requests, as applicable.

(b) Approval procedure. An application for a specific conditional use within the applicable zoning classification shall be submitted and considered in the same manner and according to the same procedure as an amendment to the official zoning map as specified in section 62-1151. The approval of a conditional use shall authorize an additional use for the affected parcel of real property in addition to those permitted in the applicable zoning classification. The initial burden is on the applicant to demonstrate that all applicable standards and criteria are met. Applications which do not satisfy this burden cannot be approved. If the applicant meets its initial burden, then the Board has the burden to show, by substantial and competent evidence, that the applicant has failed to meet such standards and the request is adverse to the public interest. As part of the approval of the conditional use permit, the Board may prescribe appropriate and reasonable conditions and safeguards to reduce the impact of the proposed use on adjacent and nearby properties or the neighborhood. A nearby property, for the purpose of this section, is defined as any property which, because of the character of the proposed use, lies within the area which may be substantially and adversely impacted by such use...

...In stating grounds in support of an application for a conditional use permit, it is necessary to show how the request fulfills both the general and specific standards for review. The applicant must show the effect the granting of the conditional use permit will have on adjacent and nearby properties, including, but not limited to traffic and pedestrian flow and safety, curb-cuts, off-street loading and parking, off-street pickup of passengers, odor, glare and noise, particulates, smoke, fumes and other emissions, refuse and service areas, drainage, screening and buffering for protection of adjacent and nearby properties, and open space and economic impact on nearby properties. The applicant, at his discretion, may choose to present expert testimony where necessary to show the effect of granting the conditional use permit.

(c) General standards of review.

- (1) The planning and zoning board and the board of county commissioners shall base the denial or approval of each application for a conditional use based upon a consideration of the factors specified in section 62-1151(c) plus a determination that the following general standards are satisfied. The Board shall make the determination whether an application meets the intent of this section.
 - a. The proposed conditional use will not result in a substantial and adverse impact on adjacent and nearby properties due to: (1) the number of persons anticipated to be using, residing or working under the conditional use; (2) noise, odor, particulates, smoke, fumes and other emissions, or other nuisance activities generated by the conditional use; or (3) the increase of traffic within the vicinity caused by the proposed conditional use.
 - b. The proposed use will be compatible with the character of adjacent and nearby properties with regard to use, function, operation, hours of operation, type and amount of traffic generated, building size and setback, and parking availability.
 - c. The proposed use will not cause a substantial diminution in value of abutting residential property. A substantial diminution shall be irrebuttably presumed to have occurred if abutting property suffers a 15% reduction in value as a result of the proposed conditional use. A reduction of 10% of the value of abutting property shall create a rebuttable presumption that a substantial diminution has occurred. The Board of County Commissioners carries the burden to show, as evidenced by either testimony from or an appraisal conducted by an MAI certified appraiser, that a substantial diminution in value would occur. The applicant may rebut the findings with his own expert witnesses.
- (2) The following specific standards shall be considered, when applicable, in making a determination that the general standards specified in subsection (1) of this section are satisfied:
 - a. Ingress and egress to the property and proposed structures thereon, with particular reference to automotive and pedestrian safety and convenience, traffic flow and control, and access in case of fire and catastrophe, shall be: (1) adequate to serve the proposed use without burdening adjacent and nearby uses, and (2) built to applicable county standards, if any. Burdening adjacent and nearby uses means increasing existing traffic on the closest collector or arterial road by more than 20%, or 10% if the new traffic is primarily comprised of heavy vehicles, except where the affected road is at Level of Service A or B. New traffic generated by the proposed use shall not cause the adopted level of service for transportation on applicable roadways, as determined by applicable Brevard County standards, to be exceeded. Where the design of a public road to be used by the proposed use is physically inadequate to handle the

numbers, types or weights of vehicles expected to be generated by the proposed use without damage to the road, the conditional use permit cannot be approved without a commitment to improve the road to a standard adequate to handle the proposed traffic, or to maintain the road through a maintenance bond or other means as required by the Board of County Commissioners.

- b. The noise, glare, odor, particulates, smoke, fumes or other emissions from the conditional use shall not substantially interfere with the use or enjoyment of the adjacent and nearby property.
- c. Noise levels for a conditional use are governed by section 62-2271.
- d. The proposed conditional use shall not cause the adopted level of service for solid waste disposal applicable to the property or area covered by such level of service, to be exceeded.
- e. The proposed conditional use shall not cause the adopted level of service for potable water or wastewater applicable to the property or the area covered by such level of service, to be exceeded by the proposed use.
- f. The proposed conditional use must have existing or proposed screening or buffering, with reference to type, dimensions and character to eliminate or reduce substantial, adverse nuisance, sight, or noise impacts on adjacent and nearby properties containing less intensive uses.
- g. Proposed signs and exterior lighting shall not cause unreasonable glare or hazard to traffic safety, or interference with the use or enjoyment of adjacent and nearby properties.
- h. Hours of operation of the proposed use shall be consistent with the use and enjoyment of the properties in the surrounding residential community, if any. For commercial and industrial uses adjacent to or near residential uses, the hours of operation shall not adversely affect the use and enjoyment of the residential character of the area.
- i. The height of the proposed use shall be compatible with the character of the area, and the maximum height of any habitable structure shall be not more than thirty-five (35) feet higher than the highest residence within 1000 feet of the property line.
- j. Off-street parking and loading areas, where required, shall not be created or maintained in a manner which adversely impacts or impairs the use and enjoyment of adjacent and nearby properties. For existing structures, the applicant shall provide competent, substantial evidence to demonstrate that actual or anticipated parking shall not be greater than that which is approved as part of the site plan under applicable county standards.

FACTORS TO CONSIDER FOR A REZONING REQUEST

Section 62-1151(c) sets forth factors to consider in connection with a rezoning request, as follows:

- "...The planning and zoning board shall recommend to the board of county commissioners the denial or approval of each application for amendment to the official zoning maps based upon a consideration of the following factors:
 - (1) The character of the land use of the property surrounding the property being considered.
 - (2) The change in conditions of the land use of the property being considered and the surrounding property since the establishment of the current applicable zoning classification, special use or conditional use.
 - (3) The impact of the proposed zoning classification or conditional use on available and projected traffic patterns, water and sewer systems, other public facilities and utilities and the established character of the surrounding property.
 - (4) The compatibility of the proposed zoning classification or conditional use with existing land use plans for the affected area.
 - (5) The appropriateness of the proposed zoning classification or conditional use based upon a consideration of the applicable provisions and conditions contained in this article and other applicable laws, ordinances and regulations relating to zoning and land use regulations and based upon a consideration of the public health, safety and welfare..."

These staff comments contain references to zoning classifications found in the Brevard County Zoning Regulations, Chapter 62, Article VI, Code of Ordinances of Brevard County. These references include brief summaries of some of the characteristics of that zoning classification. Reference to each zoning classification shall be deemed to incorporate the full text of the section or sections defining and regulating that classification into the Zoning file and Public Record for that item.

These staff comments contain references to sections of the Code of Ordinances of Brevard County. Reference to each code section shall be deemed to incorporate the section into the Zoning file and Public Record for that item.

These staff comments contain references to Policies of the Brevard County Brevard County Comprehensive Plan. Reference to each Policy shall be deemed to incorporate the entire Policy into the Zoning file and Public Record for that item.

These staff comments refer to previous zoning actions which are part of the Public Records of Brevard County, Florida. These records will be referred to by reference to the file number. Reference to zoning files are intended to make the entire contents of the cited file a part of the Zoning file and Public Record for that item.

DEFINITIONS OF CONCURRENCY TERMS

Maximum Acceptable Volume (MAV): Maximum acceptable daily volume that a roadway can carry at the adopted Level of Service (LOS).

Current Volume: Building permit related trips added to the latest MPO traffic counts.

Administrative Policies Page 8

Volume with Development (VOL W/DEV.): Equals Current Volume plus trip generation projected for the proposed development.

Volume/Maximum Acceptable Volume (VOL/MAV): Equals the ratio of current traffic volume to the maximum acceptable roadway volume.

Volume/Maximum Acceptable Volume with Development (VOL/MAV W/DEV): Ratio of volume with development to the Maximum Acceptable Volume.

Acceptable Level of Service (ALOS): Acceptable Level of Service currently adopted by the County.

Current Level of Service (CURRENT LOS): The Level of Service at which a roadway is currently operating.

Level of Service with Development (LOS W/DEV): The LOS that a proposed development may generate on a roadway.

FUTURE LAND USE MAP SERIES PLAN AMENDMENT

STAFF COMMENTS

Small Scale Plan Amendment 19S.04 (18PZ00160) Township 21, Range 34, Sections 12 & 13

Property Information

Owner / Applicant: John L. Jackson, Trustee

Adopted Future Land Use Map Designation: NC

Requested Future Land Use Map Designation: CC

Acreage: 3.81 acres Tax Account #: 2100183 (portion of)

Site Location: North side of State Road 46 (SR 46), approximately 0.2 miles west of the Interstate 95 (I-95) &

State Road 46 (SR 46) interchange

Current Zoning: GU, BU-1, and BU-2

Requested Zoning: BU-2

Surrounding Land Use Analysis

	Existing Land Use	Zoning	Future Land Use
North	Vacant	GU	NC
South	Vacant	BU-1	СС
East	Vacant	BU-2	CC a
West	Vacant	GU	NC

Background & Purpose

The applicant is seeking to amend the Future Land Use designation from Neighborhood Commercial (NC) to Community Commercial (CC) on a 3.28 acre portion of a greater 134.36 acre parcel of land. The subject property is a piece of a greater parcel which is vacant with four (4) different Future Land Use designations of Community Commercial (CC), Neighborhood Commercial (NC), Residential 2 (RES 2) and Public Conservation (PUB-CONS). While some of the greater parent parcel already retains the CC FLU designation, the applicant has indicated that additional area is necessary for the intended purposes of developing a truck stop which would include a convenience market with gas pumps, fast food restaurants with drive throughs and a tire store and a 120 room hotel.

The subject parcel is located within Unincorporated Brevard County on the north side of State Road 46 (SR 46) approximately .2 miles west of Interstate 95 (I-95) and State Road 46 (SR 46). The remaining 131.08 acres of the

subject parcel that is not included within this request consists of approximately a 26.72 acre portion of Neighborhood Commercial (NC) to the west, approximately 18.55 acres of Community Commercial (CC) to the east, approximately 48.84 acres of Residential 2 (RES 2) to the north and approximately 39 acres of Public Conservation (PUB-CONS) to the north of the Residential 2 (RES 2) portion of land. Currently, there are approximately 21.5 acres of land with the CC FLU designation within the northwest quadrant of the I-95 and SR 46 intersection. Only one .92 acre parcel in that quadrant of the intersection has been developed with a convenience store. To the south across State Road 46 (SR 46) lie several parcels with the CC FLU designation, totaling 37.67 acres in size. Only two small parcels have been developed, including a retail store on 1.41 acres and convenience store with gas pumps on 1.15 acres, while the majority of CC land in the southwest corner of the I-95 and SR 46 intersection remains vacant..

The Future Land Use designation of Neighborhood Commercial (NC) has been in place since 2001 when Brevard County combined the Future Land Use Map with the Residential Density Map during an Evaluation and Appraisal Review (EAR). Parcels previously retaining the Mixed-Use Future Land Use designation were redesignated as either Neighborhood Commercial or Community Commercial Future Land Use designations, and Community Commercial (CC) Future Land Use was designated along the County's major corridors, primarily at intersections.

A companion rezoning application was submitted accompanying this request for a Future Land Use designation change, proposing to change the Zoning classification from General Use (GU) and General Retail Commercial (BU-1) to Retail, Warehousing and Wholesale Commercial (BU-2).

Environmental Resources

Note: The Natural Resources Management Office will provide a detailed analysis at the time of the future for rezoning for of the following environmental factors: Wetlands, Floodplains, Aquifer Recharge, and Endangered or Threatened Species. Applicants are encouraged to contact the Brevard County Natural Resources Management Office concerning environmental considerations prior to planning and development. Any future development will be subject to Brevard County's land development regulations.

Historic Resources

There are two resource groups of historic or archaeological sites on the project site according to the Master Site File from the Florida Division of Historic Resources. At the time of site plan review, the potential for historical resources to be impacted will be further evaluated, as the applicant will be required to submit a description of the ground disturbing activities to the Compliance and Review Division of the Florida Department of State Division of Historical Resources.

Comprehensive Plan Policies/Comprehensive Plan Analysis

Comprehensive Plan Policies are shown in plain text; Staff Findings of Fact are shown in italics

Notice: The Comprehensive Plan establishes the broadest framework for reviewing development applications and provides the initial level of review in a three layer screening process. The second level of review entails assessment of the development application's consistency with Brevard County's zoning regulations. The third layer of review assesses whether the development application conforms to site planning/land development standards of the Brevard County Land Development Code. While each of these layers individually affords its own evaluative value, all three layers must be cumulatively considered when assessing the appropriateness of a specific development proposal.

Role of the Comprehensive Plan in the Designation of Commercial Lands Policy 2.1

The Comprehensive Plan takes into consideration broad criteria for evaluating requests for commercial land use designations within Brevard County. At a minimum, these criteria address the following:

Criteria:

Overall accessibility to the site;

The subject portion of the greater parcel does have frontage on a roadway. This portion of the parcel has frontage on State Road 46 (SR 46), an urban principal arterial roadway. Because the subject property is only accessible from a state road, accessibility to the site will be evaluated by FDOT during the site planning process.

B. Compatibility and inter-connectivity with adjacent adopted Future Land Use designations and land uses;

The subject property included in this request for change of FLU designation is a 3.81 acre portion of a greater 134.36 acre parcel that lies at the northwest corner of the I-95 and SR 46 interchange. All of the land lying east of the subject property included in this request retains the CC FLU designation. On the north and west side of the subject property, the Future Land Use designation is Neighborhood Commercial (NC), and beyond that, extending northwest from the subject property lies interspersed residentially designated and residentially developed parcels, except at the intersection of Turpentine Road and SR 46. Residential development continues along SR 46 to the Orange County Line.

The area outside of the parcel proposed for amendment is undeveloped and remains part of a larger parent parcel, yet to be subdividedwith SR 46 abutting the parcel's southern boundary. Cross -access between commercially developed parcels will be required, ensuring that this requested expansion of CC would be required to be developed in an interconnected manner. As options for access to SR 46 are severely limited, this parcel, when developed could also provide connectivity to the portions of the parent parcel to the north and west that have aNC FLU designation.

The Mims Small Area Study indicated an intention to retain commercial development at the I-95 and SR 46 node where parcels retaining commercial FLU designations are currently underutilized.

On the south side of State Road 46 (SR 46) lie several more parcels with a FLU designation of CC. .

C. Existing commercial development trend in the area;

This is the northwest corner of the major intersection of SR 46 and II-95. All of the corners at this major intersection have land with the CC FLU designation. The request for this 3.28 portion of the overall parcel would be consistent with Community Commercial (CC) portion to the east thereby creating a deeper Community Commercial (CC), developable portion of the overall parcel. The proposal would result in CC extending west of the I-95 corridor for a similar distance on both the south and north sides of the road.

Commercial development in the area has been limited over the past several years, with a retail store being developed in 2017 at the southwest corner of the SR 46 and Carpenter Road intersection. A request to convert a residence in a commercial zoning classification east of I-95 along SR 46 is also under concurrent review by County Planning & Zoning staff.

D. Fundamental changes in the character of an area prompted by infrastructure improvements undertaken by the County;

There are no fundamental changes in character within this area prompted by County infrastructure improvements.

E. Availability of required infrastructure at/above adopted levels of service;

The subject parcel is served by Brevard County Utilities' potable water supply. There are existing Brevard County Utilities', waste water force mains that run along the south side of State Road 46 (SR 46) adjacent to this parcel.

This 3.28 acre portion of the overall parcel has direct access to State Road 46 (SR 46), a roadway maintained by FDOT, to the south. Today, the traffic counts indicate that State Road 46 (SR 46) is at 70.09% Maximum Acceptable Volume (MAV). A preliminary transportation concurrency analysis indicates that the additional impact to the roadway resulting from this site's development would not fall within the Level of Service standards for this principle arterial road.

The applicant has provided a Traffic Impact Study (TIS) that recommends the installation of a traffic signal control at the State Road 46 (SR 46) and Carpenter Road intersection. A signal at this location does not meet traditional distance separation standards from the signal at the I-95 on/off ramps. The TIS also recommends the installation of a a two hundred and eighty-five foot (285') eastbound left-turn lane and a one hundred eighty-five (185') westbound right-turn lane on SR 46 at Carpenter Road. The Traffic Impact Analysis indicates that due to the proximity and limited spacing by an existing gas station to the east, the westbound right turn lane would be limited to approximately one hundred forty feet (140').

Coordination with FDOT on the appropriate location for signalized access, turn lanes, and other improvements would typically be reviewed during site development, but because their feedback may impact how the parent parcel that this subject property is a part of is subdivided in the future, the Board may wish to request that the applicant begin those coordination efforts prior to the finalization of any delination of additional CC lands.

F. Spacing from other commercial activities;

The portion of the subject parcel is adjacent to vacant land to the north,, and west, with a .92 acre convenience store with gas pumps lying directly east of the parent parcel this portion of land is a part of. The subject property is located within a commercial node at the intersection of SR 46 and I-95. This intersection has existing commercial uses on three (3) of the four (4) corners to include a Foodmart with gas pumps on the northwest corner, a McDonald's on the southeast corner and a Sugar Creek Convenient Store and a Dollar General on the southwest corner.

G. Size of proposed commercial designation compared with current need for commercial lands;

The Future Land Use designation change from Neighborhood Commercial (NC) to Community Commercial (CC) is proposed on a 3.28 acre portion of a greater 134.36 parcel of land. Consistent with Policy 2.7 of the Future Land Use Element of the Comprehensive Plan, community commercial development is intended to serve several neighborhoods and subregional areas and provide an array of retail, personal and professional uses.

H. Adherence to the objectives/policies of the Conservation Element and minimization of impacts upon natural resources and systems;

The Natural Resource Management (NRM) Department has provided a preliminary summary of adherence to the objectives/policies of the Conservation Element and the minimization of impacts upon natural resources and systems. (See attached NRM Department Summary).

I. Integration of open space; and

Open space will be evaluated during the site plan review process.

J. Impacts upon strip commercial development.

This intersection of SR 46 and I-95 is comprised of Community Commercial (CC) land uses. The promotion of strip pattern commercial development is discouraged within the Future Land Use Element for CC property. Infill within established strip commercial areas is preferred over the extension of a strip commercial pattern.

Activities Permitted in Community Commercial (CC) Future Land Use Designations Policy 2.7

Community Commercial (CC) development activities are intended to serve several neighborhoods, sub-regional and regional areas and provide an array of retail, personal and professional uses. Development activities which may be considered within the Community Commercial (CC) Future Land Use designation, provided that the guidelines listed in Table 2.2 are met, include the following:

- a) Existing strip commercial;
- b) Transient commercial uses;
- c) Tourist commercial uses:
- d) Professional offices;
- e) Personal service establishments;
- f) Retail establishments;
- g) Non-retail commercial uses;
- h) Residential uses;
- i) Institutional uses:
- j) Recreational uses;
- k) Public facilities;
- I) Transitional uses pursuant to Policy 2.12; and
- m) Planned Industrial Park development (as permitted by PIP zoning).

Locational and Development Criteria for Community Commercial Uses

Locational and development criteria for community commercial land uses are as follows:

Criteria:

A. Community Commercial clusters of up to ten (10) acres in size should be located at arterial/arterial intersections. Collector/arterial intersections are acceptable for clusters of up to ten (10) acres in size; however, the collector roadways must serve multiple residential areas. Intrusion of these land uses into the surrounding residential areas shall be limited. For Community Commercial clusters greater than ten (10) acres in size, they must be located at principal arterial/principal arterial intersections.

The subject portion of the overall parcel is 3.28 acres. Currently there is an 18.55 acre portion of the overall 134.36 acre parcel that has a Future Land Use designation of CC to the east. At the northeast corner of the I-95 interchange there are 3.77 acres of land with CC, all of which are undeveloped. At the southeast corner of the interchange are four parcels with CC totaling 6.8 acres. Only one 1.33 acres parcel is developed. At the southwest corner of the interchange lies 37.67 acres of CC designated land, with only two parcels totaling 2.56 acres in size developed to date.

The CC node at the intersection of I-95 and SR 46 is consistent with this Comprehensive Plan policy that it be located at a principal arterial/principal arterial intersection. It is important to note that the parcel does not gain access from two sides, unlike a traditional intersection, as the portion of the parcel that lies adjacent to I-95 is inaccessible; therefore, careful development of access into this property should be demonstrated throughout the planning and development of the site.

B. Community commercial complexes should not exceed 40 acres at an intersection.

This 3.28 portion of the greater 134.36 acre parcel if combined with the existing portion to the east of 18.55 acres would not exceed community commercial complexes of greater than forty (40) acres at this intersection. The applicant has not indicated any intention of constructing a "complex" of commercial development.

C. Community commercial clusters up to 10 acres in size should be spaced at least 2 miles apart and community commercial clusters up to 40 acres in size should be spaced at least five (5) miles apart.

The community commercial cluster at this intersection of SR 46 and I-95 is up to forty (40) acres. There is a six (6) acre CC cluster approximately one half mile west at the corner of SR 46 and Turpentine Road, which is developed with commercial uses such as a Night Club/Cocktail Lodge and a Circle K Convenient Store. To the east, there is a cluster of land with the CC FLU designation at the intersection of SR 46 and US1 that is just over a mile away.

D. The gross floor area of community commercial complexes should not exceed 150,000 square feet for commercial clusters up to 10 acres in size and shall not exceed 400,000 square feet for commercial clusters greater than 10 acres but less than 40 acres in size.

The gross floor area is regulated through the land development regulations at the time of site plan review.

E. Floor Area Ratio (FAR) of up to 1.00 will be permitted for Community Commercial sites.

This portion of the overall parcel has the potential for 165,963 square feet of development. The Floor Area Ratio (FAR) is regulated through the land development regulations at the time of site plan review.

F. Recreational vehicle parks shall be located in areas which serve the needs of tourists and seasonal visitors to Brevard County. The location of recreational vehicle parks shall have access to interstate interchanges via arterial and principal collector transportation corridors or the property shall be located on a major multi-county transportation corridor.

This parcel does meet the criteria to be developed as a recreational vehicle park because it does have access to an interstate interchange from State Road 46 (SR 46). **Policy 2.15**

Judging the suitability of a location for an extension of strip commercial development activities shall be based upon the following minimum criteria:

Criteria:

A. Impacts upon traffic circulation should be anticipated and mitigated through the reservation of right-of-way for road widening and marginal access streets. Access points for strip commercial complexes shall seek to minimize points of conflict by utilizing frontage roads, providing crossaccess between parcels or installing shared use curb cuts for access driveways to the maximum extent feasible, as determined by Brevard County.

The subject portion of the overall parcel does have frontage on State Road 46 (SR 46) a principal arterial roadway. If this portion of the overall parcel were to be developed with the remainder of the parcel to the north, east and west, cross-access could be made to the surrounding properties, which could result in reduced trips onto State Road 46 (SR 46). FDOT will need to review any proposed access to SR 46 at the time of development and may require that additional right-of-way be dedicated for the installation of the necessary access management improvements necessary for development at the time of site development.

B. Setbacks and landscaped or other appropriate buffers shall be established to mitigate the visual impacts of strip commercial development.

When developed with a community commercial use, the site plan associated with it will be reviewed for setbacks, landscape and buffering as part of that review to meet the current Land Development Regulations.

C. A sidewalk or bicycle path shall be required where appropriate, as encouraged by Tables 2.1 and 2.2 to provide convenient access to surrounding residents and to reduce traffic volumes on the roadways.

At the time of Site Plan review, the proposed commercial development will be reviewed taking into consideration the integration of both vehicular and non-vehicular access into the site. Currently there is no sidewalk along this portion of SR 46 in place today.

For Board Consideration

The applicant is seeking to amend the Future Land Use designation from Neighborhood Commercial (NC) to Community Commercial (CC) on a 3.28 acre portion of a greater 134.36 acre parcel of land. The subject property is a piece of a greater parcel which is vacant with four (4) different Future Land Use designations of Community Commercial (CC), Neighborhood Commercial (NC), Residential 2 (RES 2) and Public Conservation (PUB-CONS). While some of the greater parent parcel already retains the CC FLU designation, the applicant has indicated that additional area is necessary for the intended purposes of developing a truck stop which would include a convenience market with gas pumps, fast food restaurants with drive throughs and a tire store and a 120 room hotel.

The subject parcel is located within Unincorporated Brevard County on the north side of State Road 46 (SR 46) approximately 100 feet west Interstate 95 (I-95). The remaining 131.08 acres of the greater parent parcel that are not included within this request consists of approximately a 26.72 acre portion of Neighborhood Commercial (NC) to the west, approximately 18.55 acres of Community Commercial (CC) to the east, approximately 48.84 acres of Residential 2 (RES 2) to the north and approximately 39 acres of Public Conservation (PUB-CONS) to the north of the Residential 2 (RES 2) portion of land.

The request seeks the allowance to expand the more than 21.5 acres of CC in this northwest quadrant of the intersection by an additional 3.28 acres of CC, to allow for the development of the several associated uses proposed. Only one .92 acre parcel in the northwest quadrant of the intersection has been developed with a convenience store with gas pumps. To the south across State Road 46 (SR 46) lie several parcels with the CC FLU designation, totaling 37.67 acres. Only two small parcels have been developed, including a retail store on 1.41 acres and convenience store with gas pumps on 1.15 acres, while the majority of CC land in the southwest corner of the I-95 and SR 46 intersection remains vacant..

This 3.28 acre portion of the overall parcel has direct access to State Road 46 (SR 46), a roadway maintained by FDOT, to the south. Today, the traffic counts indicate that State Road 46 (SR 46) is at 70.09% Maximum Acceptable Volume (MAV). A preliminary transportation concurrency analysis indicates that the additional impact to the roadway resulting from this site's development would not fall within the Level of Service standards for this principle arterial road.

The applicant has provided a Traffic Impact Study (TIS) that recommends the installation of a traffic signal control at the State Road 46 (SR 46) and Carpenter Road intersection. A signal at this location does not meet traditional distance separation standards from the signal at the I-95 on/off ramps. The TIS also recommends the installation of a two hundred and eighty-five foot (285') eastbound left-turn lane and a one hundred eighty-five (185') westbound right-turn lane on SR 46 at Carpenter Road. The Traffic Impact Analysis indicates that due to the proximity and limited spacing by an existing gas station to the east, the westbound right turn lane would be limited to approximately one hundred forty feet (140').

Coordination with FDOT on the appropriate location for signalized access, turn lanes, and other improvements would typically be reviewed during site development. The applicant has demonstrated that a significant amount of improvements may be necessary in order to support the proposed commercial development. FDOT's feedback may impact how or whether these improvements can ultimately be implemented and may affect how the parent parcel may be subdivided in the future. The Board may wish to consider whether the request for an expansion of CC and the roadway improvements necessary to accommodate the newly proposed uses be reviewed and deemed feasible by FDOT prior to approving the expansion of any additional Community Commercial lands at this location.

This request is accompanied by a companion proposal for a change of Zoning classification from General Use (GU) and General Retail (BU-1) to Retail, Warehousing and Wholesale Commercial (BU-2).

NATURAL RESOURCES MANAGEMENT DEPARTMENT Rezoning Review SUMMARY

Item #: 18PZ00160 Applicant: Bruce Moia c/o Jackson Trustee

FLU Request: CC & NC to CC P&Z Hearing Date: 02/11/19

BCC Hearing Date: 03/07/19

This is a preliminary review based on environmental maps available to the Natural Resources Management (NRM) Department at the time of this review and does not include a site inspection to verify the accuracy of this information. This review does not ensure whether or not a proposed use, specific site design, or development of the property can be permitted under current Federal, State, or County Regulations. In that this process is not the appropriate venue for site plan review, specific site designs that may be submitted with the rezoning will be deemed conceptual and any comments or omissions relative to specific site design do not provide vested rights or waivers from these regulations, unless specifically requested by the owner and approved by the Board of County Commissioners. If the owner has any questions regarding this information, he/she is encouraged to contact NRM at 321-633-2016 prior to submittal of any development or construction plans.

Natural Resource	Preliminary Assessment	Natural Resource	Preliminary Assessment
Hydric Soils/Wetlands	Not mapped	Coastal Protection	N/A
Aquifer Recharge Soils	Not mapped	Surface Waters	N/A
Floodplains	Not mapped	Wildlife	Potential

Comments:

This review relates to the following property: Twp. 21, Rng. 34, Sec. 12;


Tax ID No: 2100183

Information available to NRM indicates that federally and/or state protected species may be present on the property. Prior to any plan, permit submittal, or development activity, including land clearing, the applicant should obtain any necessary permits or clearance letters from the Florida Fish and Wildlife Conservation Commission and/or U.S. Fish and Wildlife Service, as applicable.

The applicant is advised to refer to Article XIII, Division 2, entitled Land Clearing, Landscaping, and Tree Protection, for specific requirements for preservation and canopy coverage requirements. Per Section 62-4341(18), Specimen Trees shall be preserved or relocated on site to the Greatest Extent Feasible. Per Section 62-4332, Definitions, Greatest Extent Feasible shall include, but not be limited to, relocation of roads, buildings, ponds, increasing building height to reduce building footprint or reducing Vehicular Use Areas.


LOCATION MAP

JOHN L. JACKSON, JR., TRUSTEE, et al

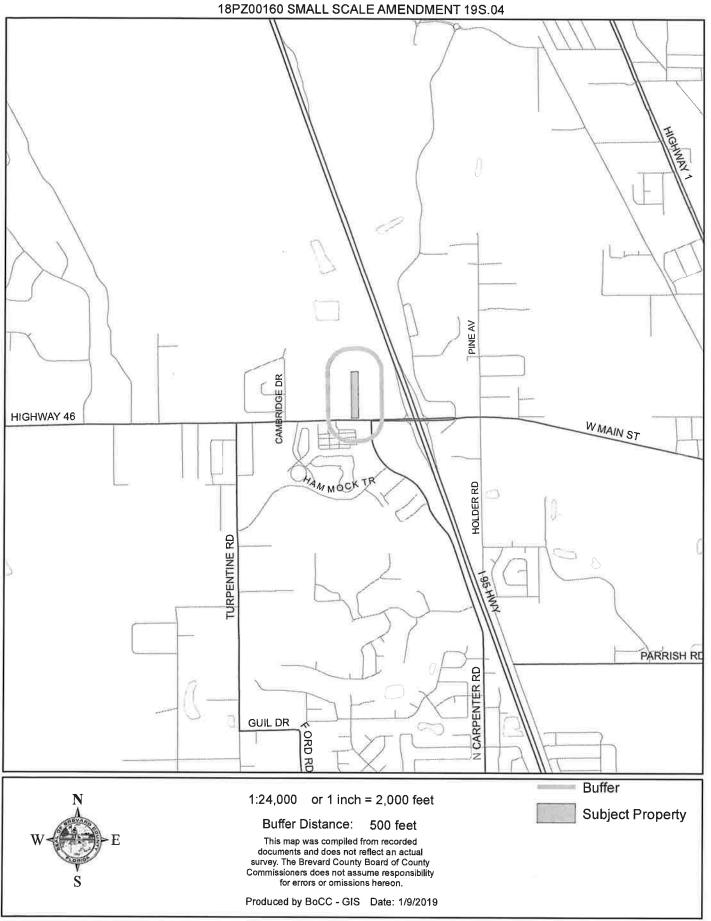


ZONING MAP

JOHN L. JACKSON, JR., TRUSTEE, et al

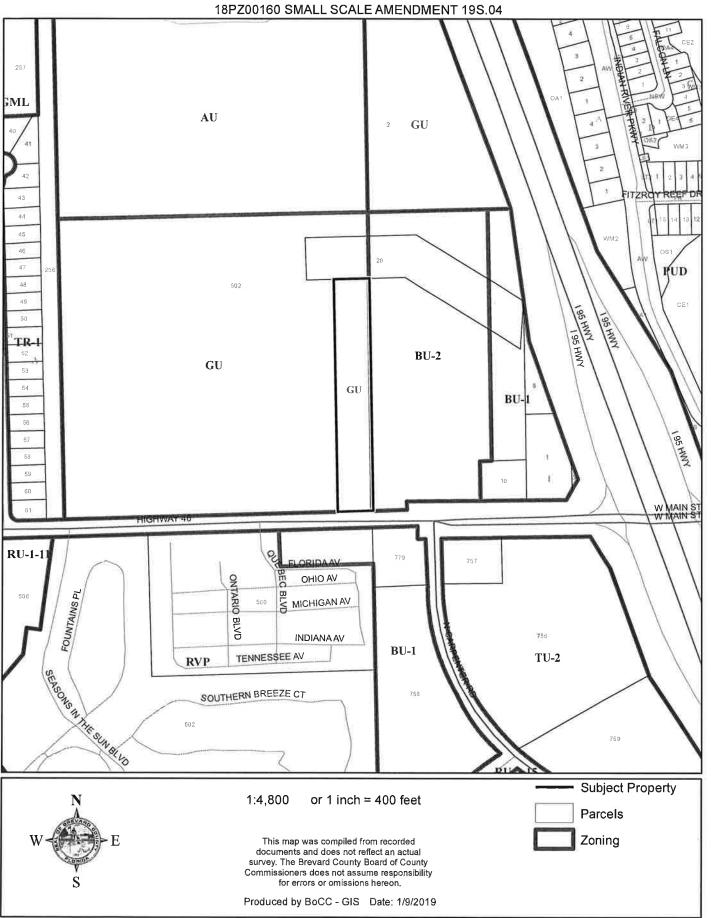


FUTURE LAND USE MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

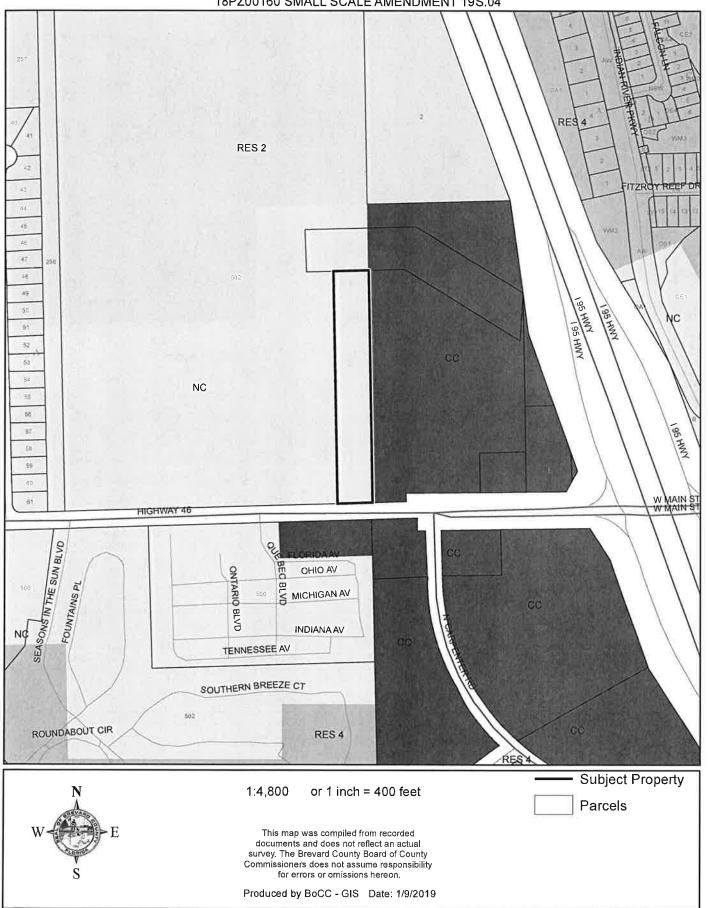

PROPOSED FUTURE LAND USE MAP

JOHN L. JACKSON, JR., TRUSTEE, et al

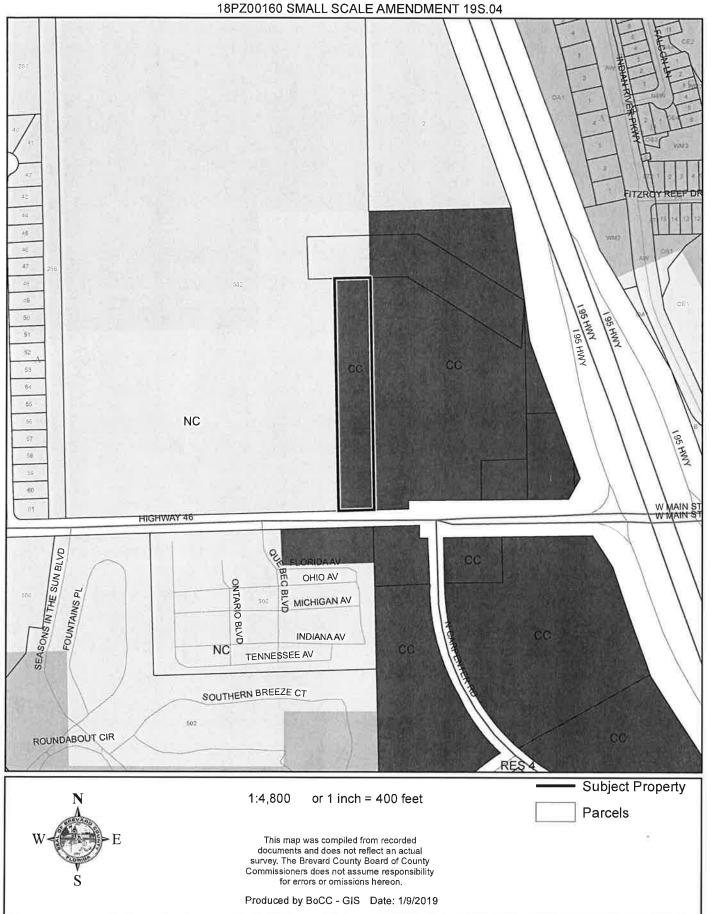

AERIAL MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04





1:4,800 or 1 inch = 400 feet

PHOTO YEAR:

2018

This map was compiled from recorded documents and does not reflect an actual survey. The Brevard County Board of County Commissioners does not assume responsibility for errors or omissions hereon.


Produced by BoCC - GIS Date: 1/9/2019

Subject Property

Parcels


NWI WETLANDS MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

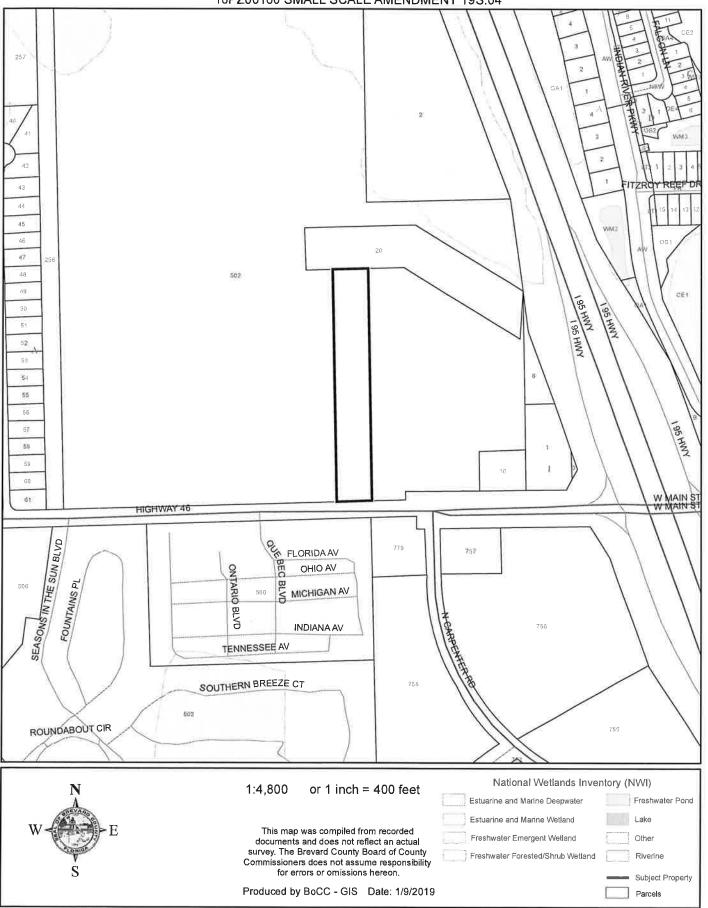


SJRWMD FLUCCS WETLANDS - 6000 Series MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

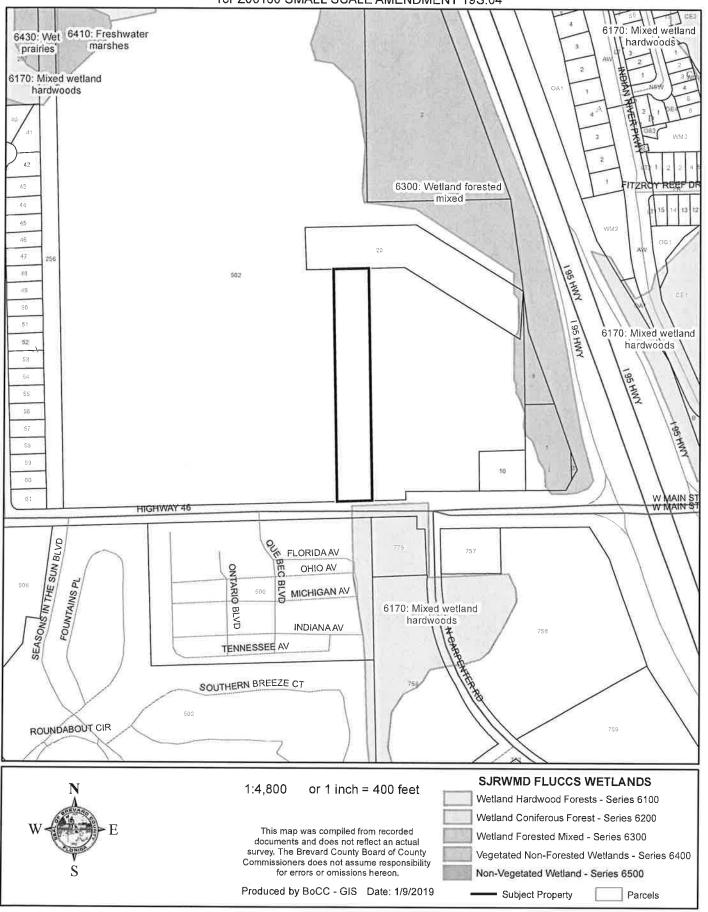


USDA SCSSS SOILS MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

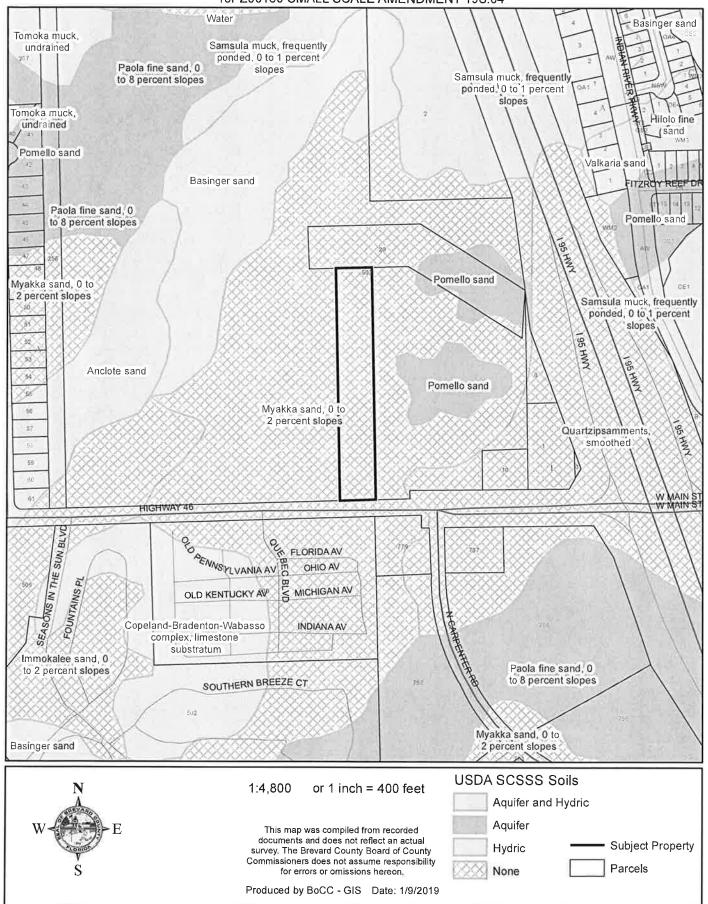


FEMA FLOOD ZONES MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

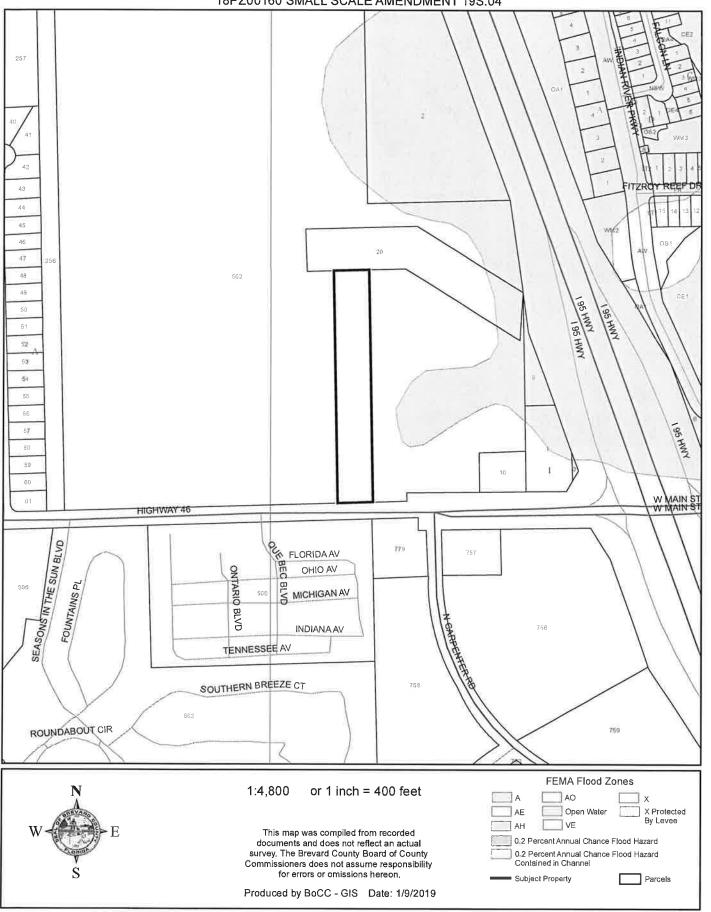


EAGLE NESTS MAP

JOHN L. JACKSON, JR., TRUSTEE, et al

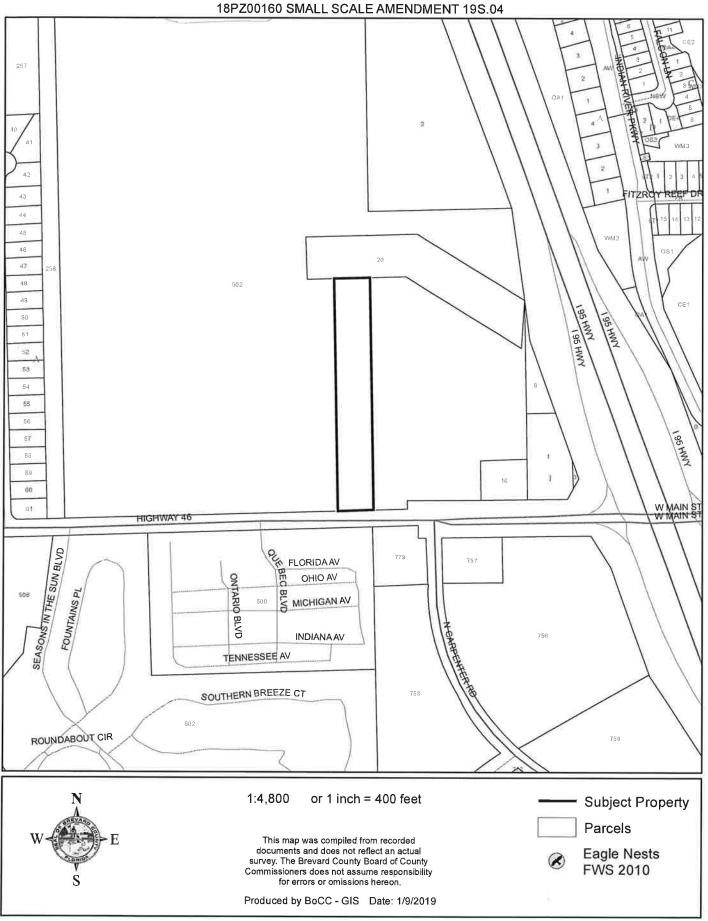


SCRUB JAY OCCUPANCY MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

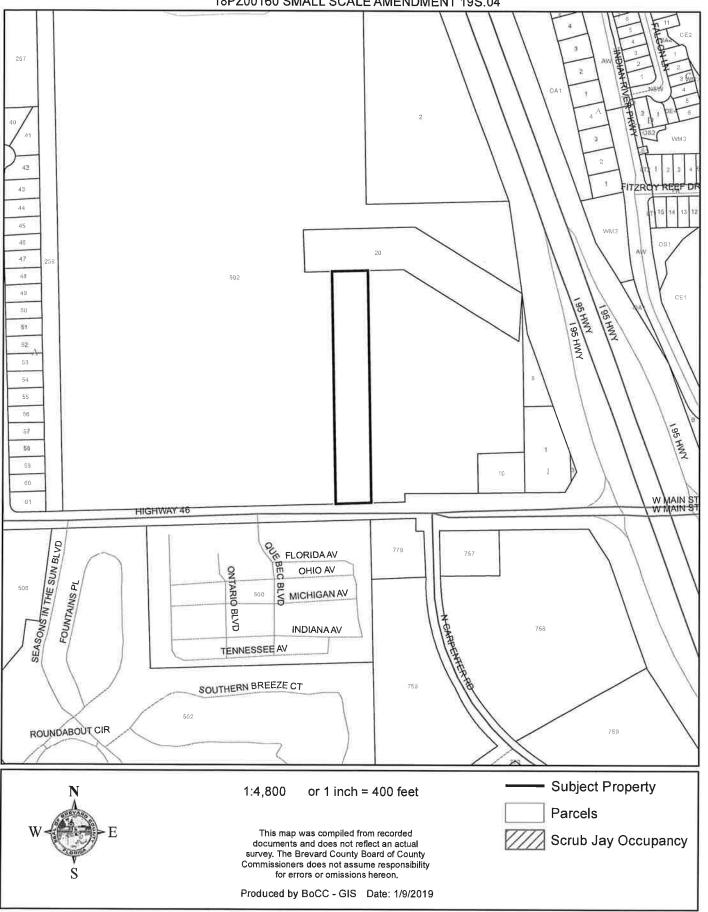

SJRWMD FLUCCS UPLAND FORESTS - 4000 Series MAP

JOHN L. JACKSON, JR., TRUSTEE, et al 18PZ00160 SMALL SCALE AMENDMENT 19S.04

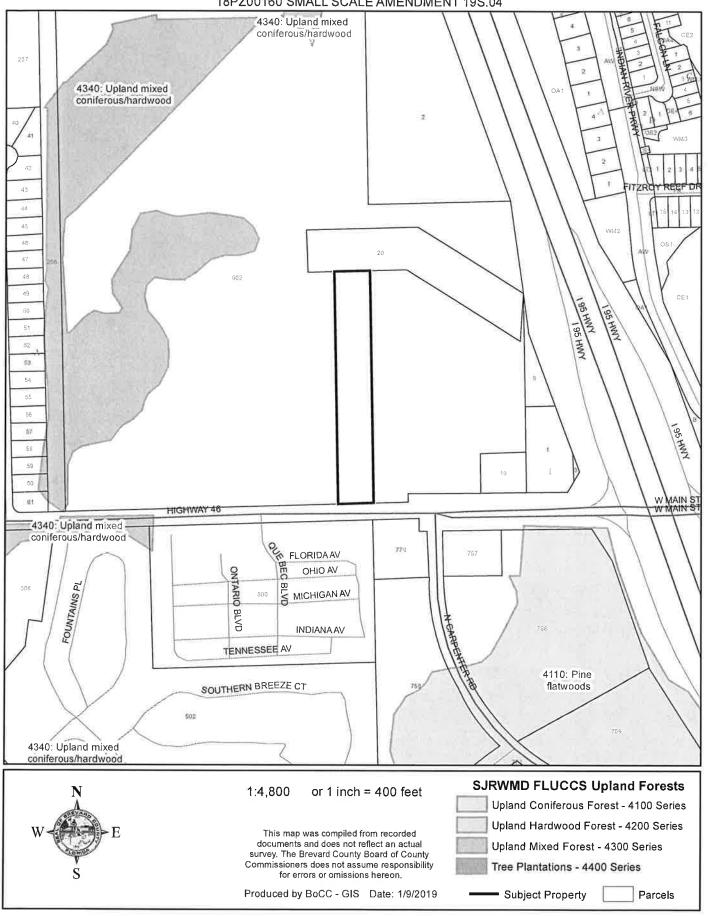

Traffic Signal Warrant Study

SR 46 at N. Carpenter Road (Brevard County)

LTG Job No.: 4607.06

Prepared For:

LOVE'S TRAVEL STOPS & COUNTY STORES, INC.

Prepared By:



1970 Dairy Road W. Melbourne, Florida 32904

February 13, 2019

Engineer of Record: George Galan

P.E. No. 60080

PROFESSIONAL ENGINEERING CERTIFICATION

I hereby certify that I am a Professional Engineer properly registered in the State of Florida practicing with LTG, Inc., a corporation authorized to operate as an engineering business, EB 0009227, by the State of Florida Department of Professional Regulation, Board of Professional Engineers, and that I have prepared or approved the evaluations, findings, opinions, conclusions, or technical advice attached hereto for:

PROJECT: SR 46 at North Carpenter Road – Traffic Signal Warrant Study


LOCATION: Brevard County, Florida

CLIENT: Love's Travel Stops & Country Stores, Inc.

JOB #: 4607.06

I hereby acknowledge that the procedures and references used to develop the results contained in these computations are standard to the professional practice of Transportation Engineering as applied through professional judgment and experience.

Prepared by: LTG, Inc. 1450 W. Granada Blvd, Suite 2 Ormond Beach, FL 32174 Certificate of Authorization 9227 386/257-2571



This item has been electronically signed and sealed by: George Galan, PE on date shown using a digital signature.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

TABLE OF CONTENTS	
Executive Summary	1
Introduction	2
Existing Conditions	4
Existing Traffic Volumes	8
Qualitative Assessment	9
Operation:	9
Safety:	.12
Maintenance:	. 12
Future Conditions	.13
Project Trip Generation	.13
Hourly Trip Variation	.13
Collision Summary	. 16
Signal Warrant Analysis	. 19
Recommendations	.20
Figure 1: Study Location Map	3
Figure 2: Condition Diagram	
Figure 3: Collision Diagram	
TABLES Table 1 Summary of Existing Conditions	1
Table 2 Turning Movement Count Summary	
Table 3 Gross Trip Generation	
Table 4 Net Trip Generation	
Table 5 Hourly Variation of Project Traffic – Major Street	
Table 6 Hourly Variation of Project Traffic – Minor Street	
Table 7 Collision Summary	
Table 8 Summary of Signal Warrant Analysis – Existing Conditions	
Table 9 Summary of Signal Warrant Analysis – Phase I Conditions	
rasio o darimary di digital vvarianti/malyolo i ritado i donalianti	13
APPENDICES	
Appendix A – Preliminary Site Plan	
Appendix B – Raw Count Data	
Appendix C – Traffic Trend Analysis Sheet	
Appendix D – Traffic Signal Warrants – Existing Conditions	
Appendix E – Traffic Signal Warrants – Phase I Conditions	

EXECUTIVE SUMMARY

LTG, Inc. has conducted a Traffic Signal Warrant Study (TSWS) at the intersection of SR 46 and North Carpenter Road for the proposed Love's Travel Plaza development in unincorporated Brevard County, Florida. Based on the results of the analysis and engineering judgment, the following recommendations and conclusions were developed:

- A traffic signal is warranted at the intersection of SR 46 and North Carpenter Road.
- During the existing conditions the intersection meets Warrant 2: 4-Hour Vehicular Volume. The traffic volume on the major street is so heavy that the northbound approach suffers excessive delay or conflict in entering SR 46.
- During the Phase I conditions the intersection meets Warrant 1A: Minimum Vehicular Volume, Warrant 1B: Interruption of Continuous of Continuous Traffic, and Warrant 2: 4-Hour Vehicular Volume. The southbound approach experiences excessive delay.
- Within a 12-month period, from February 1, 2017 to February 1, 2018, there were 4 crashes (1 left-turn
 and 2 off-road collisions) reported at the study intersection that were susceptible to correction by the
 installation of a traffic signal.
- It is recommended to install a traffic signal during the existing conditions.


LTG's analysis was based on methods which are consistent with those set forth in the *Manual on Uniform Traffic Control Devices* (MUTCD) and standard practice in the State of Florida.

INTRODUCTION

LTG, Inc. has been retained by Love's Travel Stops & Country Stores, Inc. to conduct a Traffic Signal Warrant Study (TSWS) at the intersection of SR 46 and North Carpenter Road for the proposed Phase I Love's Travel Plaza located in the community of Mims, Florida in unincorporated Brevard County. The existing stop-sign controlled T-intersection configuration will be revised to a 4-leg intersection due to the Love's Travel Plaza Development entrance/exit on the north side of SR 46, opposite of North Carpenter Road.

The development is proposed as a two-phased project. Phase I consists of an 10,300 square feet Gas Station with 24 fueling positions (16 vehicle fueling positions and 8 truck fueling positions), a 2,670 square feet Fast Food Restaurant with a drive through, and a tire superstore with 3 service bays. The anticipated build-out year for Phase I is 2020. This study is based on Phase I only. Figure 1 shows the location of the project relative to the surrounding road network. A preliminary site plan is attached as Appendix A.

The purpose of this study is to determine if Phase I warrant signalized traffic control at the intersection of SR 46 and North Carpenter Road. The analysis methods used in conducting this study are consistent with those set forth in the *Manual on Uniform Traffic Control Devices* (MUTCD), the *Manual on Uniform Traffic Studies* (MUTS), and FDOT guidelines and procedures. This report documents the existing conditions, future conditions, signal warrant analysis, and recommendations.

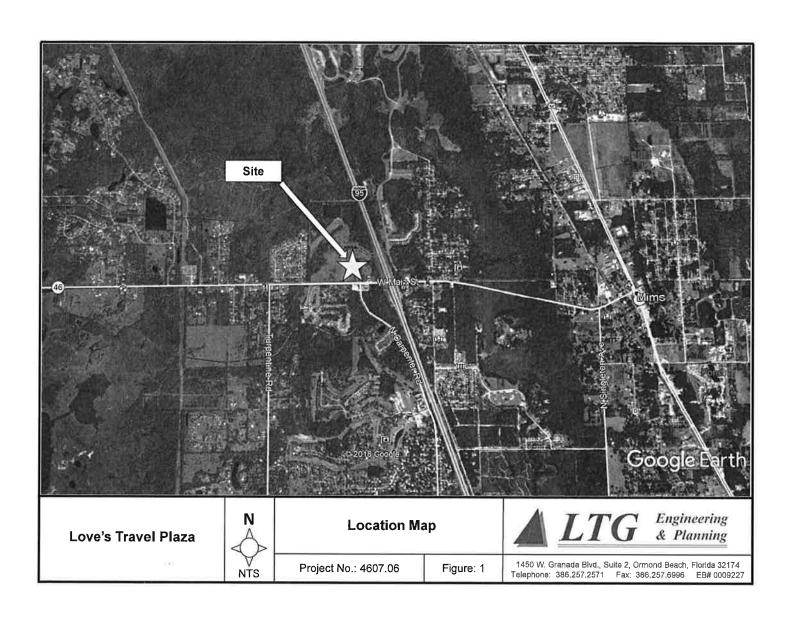

EXISTING CONDITIONS

SR 46 is presently a two-way, two-lane, east-west, undivided facility with a posted speed limit of 55 mph in the vicinity of the study intersection. North Carpenter Road is a two-way, two-lane, north-south roadway and provides access to the Love's Travel Plaza located on the northwest quadrant of the SR 46 and North Carpenter Road. A westbound left-turn lane is provided at the intersection of SR 46 and N Carpenter Road. A condition diagram for the intersection is presented as Figure 2, and images of the intersection are included on the following pages. Significant features of the intersection are summarized in Table 1 below:

Table 1
Summary of Existing Conditions
SR 46 and North Carpenter Road TSWS

Feature	Description									
Main Street	SR 46									
Side Street	North Carpenter Road / Project Driveway.									
Area Location	The intersection is just west of I-95 in the community of Mims, Florida.									
Surrounding Development	The surrounding development consists of commercial land uses.									
Land Uses at Intersection	The northwest quadrant is occupied by the proposed land development. The northeast, southwest and southeast quadrants are occupied by the commercial land uses.									
Pedestrian Generators	None									
Traffic Control	This intersection has a two-way stop control with uninterrupted flow east and west.									
	<u>Function</u> – North-south urban collector									
	Connectivity – SR 46 (North) and Dairy Road (South)									
	Cross Section - Two-lane undivided roadway									
	Posted Speed Limit – 40 mph									
N Carpenter Road/ Project Driveway	Alignment – The roadway is level and slightly shift to the east in the northbound direction.									
	Sidewalks - None									
	Utilities – Overhead electric is located on the west side of the road									
	Street Lighting – Lighting is located on the southeast corner of the intersection.									
	Function – east-west arterial roadway									
	Connectivity - SJHP (West) and Minton Road (East)									
	Cross Section - Two-lane undivided roadway									
	Posted Speed Limit – 55 mph									
SR 46	Alignment - Straight and level									
	Sidewalks - None.									
	<u>Utilities</u> – Overhead Electric on the north side of the road.									
	Street Lighting – Lighting is located on the southeast corner of the intersection.									
Other Distinct										
Features	None									




Image 1 - Carpenter Road Northbound



Image 2 - SR 46 Westbound




Image 3 - SR 46 Eastbound

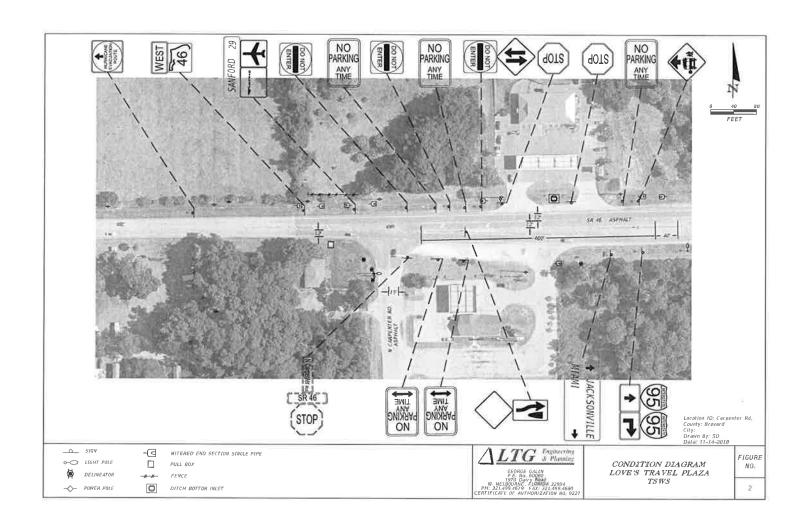

Existing Traffic Volumes

Continuous 24-hour machine approach counts were collected for the east, west and south approach to the intersection of SR 46 and North Carpenter Road on Wednesday, November 14, 2018. The 24-hour approach counts yielded 5,268 eastbound vehicles, 6,419 westbound vehicles and 1,475 northbound vehicles approached the intersection on the day of collection.

12-hour turning movement counts were collected at the subject intersection from 7:00 a.m. to 7:00 p.m. on Wednesday, October 10, 2018, and Wednesday, November 14, 2018. The eight highest hours were identified from utilizing the 12-hour turning movement counts. The eight highest count hours selected include 7:00 a.m. to 9:00 a.m., 12:00 p.m. to 1:00 p.m. and 2:00 p.m. to 7:00 p.m. The a.m. peak traffic volumes at the intersection occur from 7:15 a.m. — 8:15 a.m. with a total of 988 vehicles per hour (vph) approaching the intersection. The p.m. peak traffic volumes at the intersection occur from 5:00 p.m. — 6:00 p.m. with a total of 1.138 vehicles per hour (vph) approaching the intersection.



The raw count data is included in Appendix B. Table 2 summarizes the minimum and maximum volumes and the average approach percent distribution of turning movements during the twelve highest hours:

Table 2
Turning Movement Count Summary
Wisteria Ave at SR 46

Moveme	ont	- 3 /E	В	W	В	N	IB	
Moveme	atit.	Min	Max	Min	Max	Min	Max	
Left	Volume	0	0	54	147	13	43	
Leit	Avg %	0	%	239	%	25	5%	
Thanash	Volume	247	434	165	495	0	0	
Through	Avg %	93	3%	779	%	0%		
D1 14	Volume	7	44	0	0	29	141	
Right	Avg %	7'	%	0%	6	75%		

Existing turning movement counts dated November 20, 2018

QUALITATIVE ASSESSMENT

The intersection of SR 46 at North Carpenter Road was observed during the p.m. peak-hour to assess existing operating conditions and to determine if installing a traffic signal would be potentially beneficial. The following conditions were observed:

Operation:

General Observations:

- Four (4) pedestrians were observed at the study intersection during the p.m. peak-hour. Two of Four pedestrians were crossing SR 46.
- Ten (10) westbound vehicles were observed making U-turn at the end of the raised median prior to reaching the end of the turn lane, thereby reducing the deceleration distance for other left-turn vehicles.
- Northbound direction has limited sight distance from the west direction.

Eastbound:

- During the p.m. peak-hour eastbound right-turn vehicles onto Carpenter Road caused through-lane blockage resulting in hard-braking and tailgating.
- No long queue was observed on eastbound direction.
- Two (2) eastbound vehicles were observed passing over Carpenter Road and using shoulder as deceleration lane to make the right-turning movement into the Gas Station.

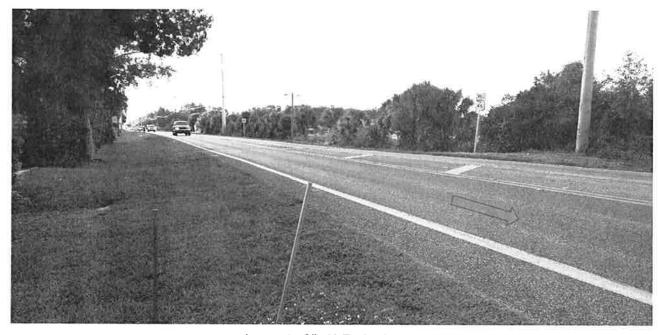


Image 4 - SR 46 Facing West



Image 5 SR 46 Facing East

Westbound:

- During the p.m. peak-hour, a maximum queue of five (5) vehicles and delay of 45 seconds were observed for the westbound left-turn movement.
- Ten (10) westbound vehicles were observed making U-turns from the end of the raised median prior to reaching the end of the turn lane during the p.m. peak-hour, thereby reducing the deceleration distance for other left turn vehicles. There currently isn't enough radius to accommodate westbound U-turns. A possible solution is to extend the raised median to the intersection and provide a bulb-out at the intersection to help facilitate the movement.



Image 6 - SR 46 Facing East



Image 7 - SR 46 Facing West

Northbound:

- The maximum queue for the northbound movement was eight (8) vehicles during the p.m. peak hour. Delay was observed to be 80 seconds, and the queue dissipated quickly.
- Northbound direction has a limited sight distance. Vehicles turning left from the northbound approach
 were observed driving past stop bar in order to get a clear sight to perform the turning movement. It was
 also observed that vehicles turning left from the westbound approach had a harder time performing their
 turn due to the northbound vehicle being their turning radius.



Image 7 - Carpenter Road Facing South

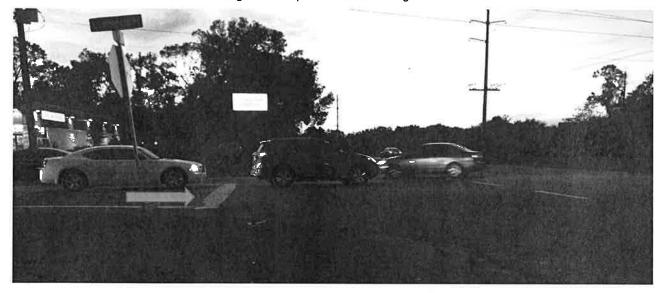


Image 8 - N Carpenter Road Facing West

Safety:

No signs of skid marks, broken glass, plastic, or other indication of a crash were observed at the study intersections.

Maintenance:

The signs, pavement markings, and pavement conditions at the study intersection are in good condition. The grass area on the southeast side of SR 46 is in poor condition. No pedestrian facilities are provided at the intersection of SR 46 and North Carpenter Road.

FUTURE CONDITIONS

Due to planned Love's Travel Plaza on the north side of SR 46, evaluation of signal warrants was based on both the existing and future roadway conditions. The following presents the methods used to determine the traffic volumes for the signal warrant evaluation.

Project Trip Generation

Trip generation for the proposed development was determined using the trip generation rates published by the Institute of Transportation Engineers (ITE) in the document *Trip Generation*, 10th Edition. The daily, a.m., and p.m. peak-hour trips generated for Phase I of the development are provided in Table 3.

Table 3
Gross Trip Generation
SR 46 and North Carpenter Road TSWS

Time Period	Land Use	Land Use Code	Trip Rate Equation	Size	Units	Percent Entering	Percent Exiting	Trips Entering	Trips Exiting	Total Trips
	Super Convenience Market/Gas Station	960	T=837.58(X)	10.3	KSF	50%	50%	4.314	4,313	8,627
Daily	Fast Food Restaurant with Drive Through	934	T=470.95(X)	2.70	KSF	50%	50%	636	636	1,272
	Tire Store	849	T=30.55(X)	3.00	Service Bays	50%	50%	46	46	92
		4,996	4,995	9,991						
	Super Convenience Market/Gas Station	960	T=83.14(X)	10.3	KSF	50%	50%	428	428	856
A.M. Peak- Hour	Fast Food Restaurant with Drive Through	934	T=40.19(X)	2.70	KSF	51%	49%	55	54	109
Hour	Tire Store	849	T=2.01(X)	3.0	Service Bays	65%	35%	4	2	6
			Totals:					487	484	971
P.M.	Super Convenience Market/Gas Station	960	T=69.28(X)	10.3	KSF	50%	50%	357	357	714
Peak- Hour	Fast Food Restaurant with Drive Through	934	T=32.67(X)	2.70	KSF	52%	48%	46	42	88
noul	Tire Store	849	T=3.17(X)	3	Service Bays	47%	53%	4	6	10
			Totals:					407	405	812

Due to the nature of the proposed development, a certain portion of the trips is expected to remain internal to the site. The internal capture rate was calculated based on a.m. and p.m. NCHRP Report 684 Internal Capture Estimator. Additionally, a portion of the new trips known as pass-by will be attracted to the project from the existing traffic on the adjacent roadways. These pass-by trips were calculated using procedures outlined in the *Trip Generation Handbook, 3rd Edition*. The internal capture and pass-by trips associated with the development were deducted from the gross total project trips to determine the new net external trips. The results are presented in Table 4.

Hourly Trip Variation

The hourly entering and exiting project trips were determined using hourly variation percentage, published by in the *ITE Hourly Distribution of Entering and Exiting Vehicle Trips by Land Use*, multiplied by the land use entering and exiting trips and the directional distribution. The anticipated 8 highest hourly project traffic were selected between the hours of 7:00 a.m. to 7:00 p.m. The project hourly trips were added to the background hourly traffic to provide the total approach hourly volumes. The northbound and southbound hourly trip distribution were evaluated to determine which side of the minor street generated more traffic. Base on the analysis, the southbound direction was used due to higher hourly traffic volume. Tables and 6 provide the results of the major and minor road calculations.

Table 4 Net Trip Generation SR 46 and North Carpenter Road TSWS

Time	Land	7.0	Total Trip	S	Inte	rnal Tr	ips	Pass-b	y Trips	Total	New	External	Trips
Period	Use	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total
	Super Convenience Market/Gas Station	4,314	4,313	8,627	0	0	0	0	0	0	4,314	4,313	8,627
Daily	Fast Food Restaurant with Drive Through	636	636	1,272	0	0	0	0	0	0	636	636	1,272
	Tire Store	46	46	92	0	0	0	0	0	0	46	46	92
	Totals:	4,996	4,995	9,991	0	0	0	0	0	0	4,996	4,995	9,991
AM	Super Convenience Market/Gas Station	428	428	856	8	28	36	260	248	508	160	152	312
Peak- Hour	Fast Food Restaurant with Drive Through	55	54	109	28	8	36	13	23	36	14	23	37
	Tire Store	4	2	6	0	0	0	0	0	0	4	2	6
	Totals:	487	484	971	36	36	72	273	271	544	178	177	355
PM	Super Convenience Market/Gas Station	357	357	714	17	13	30	190	193	383	150	151	301
Peak- Hour	Fast Food Restaurant with Drive Through	46	42	88	13	17	30	17	13	30	16	12	28
	Tire Store	4	6	10	0	0	0	0	0	0	4	6	10
	Totals:	407	405	812	30	30	60	207	206	413	170	169	339

Pass-by rates: Gas Station: A.M. - 62%, P.M. - 56%; Fast Food Restaurant: A.M. - 49%, P.M. - 50%

Table 5 Hourly Variation of Project Traffic – Major Street SR 46 and North Carpenter Road TSWS

		Lar	nd Use C	ode			М	ajor - E	В					Ma	ijor - V	VB			
Time		ITE Hourly Variation - Entering ¹			Existing Hourly Traffic	Projected BG Growth Traffic ²	Entering Project Trips d=enter *20%*a		Total Project Trips	Build-Out Approach Total	Existing Hourly Traffic	Projected BG Growth Traffic ²	Entering Project Trips k=enter *55%*a		Total Project Trips	Build-Out Approach Total	EB-WB Mainline Total		
From To 7:00 AM 8:00 A	То	960 (a1)	934 (a2)	848 (a3)	(c)	(d=GR *c*SF)	960 (e1)	934 (e2)	848 (e3)	(f)	(g=d+f)	(i)	(j=GR *i*SF)	960 (k1)	934 (k2)	848 (k3)	(1)	(m=j+l)	
7:00 AM	8:00 AM	5.7%	3.2%	4,7%	463	541	49	4	0	54	595	360	421	135	11	1	148	569	1,164
8:00 AM	9:00 AM	6.4%	3.4%	9.5%	355	415	55	4	1	60	475	302	353	152	12	2	166	519	995
12:00 PM	1:00 PM	6.3%	11.7%	6.5%	292	322	54	15	1	70	392	370	409	149	41	2	192	601	993
2:00 PM	3:00 PM	6.0%	5.8%	9.3%	295	326	52	7	1	60	386	435	480	142	20	2	165	645	1,031
3:00 PM	4:00 PM	6.3%	5.6%	9.3%	290	320	54	7	1	62	382	445	491	149	20	2	171	663	1,045
4:00 PM	5:00 PM	6.3%	5,7%	8.5%	316	369	54	7	1	62	432	612	716	149	20	2	172	887	1,319
5:00 PM	6:00 PM	6.6%	6,8%	5.5%	429	502	57	9	1	66	568	629	735	157	24	1	182	917	1,485
6:00 PM	7:00 PM	6.0%	7.3%	1.6%	337	372	52	9	0	61	433	503	555	142	26	0	168	724	1,157

¹ Hourly Variation percentages from ITE Trip Generation

Table 6 Hourly Variation of Project Traffic – Minor Street SR 46 and North Carpenter Road TSWS

		La	and Use Cod	е	Minor - SB									
Tir	ne	ITE Hour	y Variation -	Exiting ¹	Existing Hourly Traffic (p)		ering Pr Trips exit *100		Total Project Trips	Build-Out Approach Total				
From	То	960 (b1)	934 (b2)	848 (b3)		960 (r1)	934 (r2)	848 (r3)	(s)	(t=p+s)				
7:00 AM	8:00 AM	5.7%	2.9%	1.0%	0	135	69	24	228	228				
8:00 AM	9:00 AM	6.3%	3.3%	4.8%	0	149	78	114	342	342				
12:00 PM	1:00 PM	6,3%	11.8%	8,2%	0	149	280	195	624	624				
2:00 PM	3:00 PM	6,0%	6.4%	11.6%	0	142	152	275	569	569				
3:00 PM	4:00 PM	6.2%	5.6%	11.0%	- 0	147	133	261	541	541				
4:00 PM	5:00 PM	6.3%	5.4%	10.4%	0	149	128	247	524	524				
5:00 PM	6:00 PM	6,5%	6.4%	8.2%	0	154	152	195	501	501				
6:00 PM	7:00 PM	6,1%	7.2%	4.4%	0	145	171	104	420	420				

^{1.} Hourly Variation percentages from ITE Trip Generation

² A minimum 2% growth rate and FDOT Season Factor are applied to existing trips.

COLLISION SUMMARY


Crash Data for a three-year period (January 1, 2014 to August 7, 2018) was obtained from Signal Four Analytics. A total of 14 crashes were reported, and consisted of the following crash types:

- 3 rear-end collisions;
- 4 left-turn collisions:
- 2 sideswipes;
- 5 off-roads;
- The crashes have resulted in no fatalities, 2 injuries, and \$84,900 in estimated property damage.
- 10 crashes occurred during the day and 4 occurred at night.
- 11 crashes occurred under dry pavement conditions and 3 occurred under wet pavement conditions.
- 3 crashes occurred due to vehicles that failed to yield the right-of-way. 1 crash occurred due to a stop sign violation when the vehicle attempted to cross SR 46. 5 collisions involving in the single-vehicle offroad were reported.
- Within a 12-month period, from February 1, 2017 to February 1, 2018, there were 4 crashes (1 left-turn and 2 off-road collisions) reported at the study intersection that were susceptible to correction by the installation of a traffic signal.

A detailed collision summary featuring the crashes is provided in Table 6 and graphically depicted in Figure 3.

Table 7 Collision Summary SR 46 and North Carpenter Road TSWS

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION FORM 750-020-06													
					A DEPARTI NEERING	MENT C	F TRANSP	ORTATION			FORM 750-020-06		
			CR.	ASH SUM	MARY						12/18/2017		
LOCA	ATION: Propos	ed Signal			S.R. NO.:	46							
INTE	RSECTING RO	DUTE: SR 46 a	t Carpenter F	₹d	M.P.:				ENGINEER: G. Ramirez				
STUE	Y PERIOD F	ROM: 1-1-2014			TO: 8-7-2			76	COUNTY: Brevard				
NO.	DATE	DAY	TIME	FATAL	INJUR Y		OPERTY AMAGE	DAY/ NIGHT	WET/ DRY	CONTRI	BUTING CAUSE		
1	3/2/2014	Sunday	12:40 PM	I.	- \$ 7,000 D					Failed to Yield Right-of-Way			
2	5/29/2014	Thursday	6:00 PM	le.		\$	2,200	Dusk	Ð	Careless Drivir	ng		
3	7/16/2014	Wednesday	3:00 PM		:=	\$	2,000	D	W	Careless Drivir	ng		
4	1/21/2015	Wednesday	5:46 AM			\$	5,500	Dark - Lighted	D	Failed to stop			
5	6/28/2015	Sunday	10:50 AM	(e:	1	\$	9,000	D	D	Failed to Yield Right-of-Way			
6	12/15/2015	Tuesday	5:58 PM	000	2	\$	4,200	Dusk	D	Followed too C	losely		
7	1/16/2016	Saturday	9:30 AM		-	\$	10,000	D	Improper Turn				
8	2/6/2016	Saturday	9:49 AM		Ħ	\$	7,500	D	D	Careless Drivir	ng, DUI		
9	2/21/2017	Tuesday	3:50 PM	Xe:	=	\$	3,500	D	D	Run off Roadway			
10	6/13/2017	Tuesday	6:34 PM	<u>'@</u>		\$	2,500	D	W	Followed too Closely			
11	5/21/2018	Monday	9:38 PM	-	¥	\$	5,000	Dark - Not Lighted	w	Drove too Fast	for Conditions		
12	11/6/2017	Monday	3:39 PM			\$	3,500	D	D	Failed to Yield	Right-of-Way		
13	11/19/2017	Sunday	11:30 AM	160	11	\$	1,000	D	D	Careless Drivir	ng		
14	8/7/2018	Tuesday	4:20 PM		-	\$	22,000	D	D	Careless Drivir	ng		
	TOTAL			0	2	\$	84,900						
TC	TAL NO.	FATAL	INJURY	P.D.	ANGLE	LEF	T TURN	RIGHT T	URN	REAR END	SIDESWIPE		
	14	0	2	12	0		4	0		3	2		
ONE	VEHICLE	PED/ BIKE	DAY	NIGHT	WET	WET DRY EXCESS				SPEED FTY R/W DUI			
	5 0 10 4 3				11 1				3	11			
	тот	AL VEHICLES	ENTERING/	ADT:		CRAS MEV	H RATE:			0.649532012			

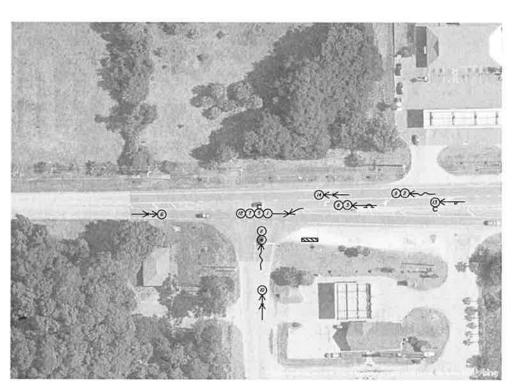



Location ID: 5R 46 at N Carpenter Rd County: Breward County City: Drawn By: SD Period:01/01/2014 to 08/07/2018

CONDITION CODES

PAVEMENT CONDITION:
D=DRY W=WET I=ICY
WEATHER CONDITION:
C=CLEAR R=RAIN F=GG K=CLOUDY
LIGHT CONDITION:
L=DAYLIGHT N=NIGHTIOARK)
TIME OF DAY (MILITARY)

	CRAS	SH SUMMAR	Y	
	PROP DMG ONLY	INJURY	FATAL	TOTAL
DAYTIME	8	2	0	10
NIGHTTIME	4	0	0	4
TOTAL	12	2	0	14

✓ VEHICLE PATH

PARKED VEHICLE SIDE SWIPE U PERSONAL INJURY - OUT OF CONTROL

REAR-END COLLISION OVERTURNED VEHICLE
SIDE SWIPE
LEFT TURN COLLISION

COLLISION DIAGRAM LOVES TRAVEL PLAZA

PAGE HO. 3

SIGNAL WARRANT ANALYSIS

The traffic volumes and geometric conditions were compared with the warrants for the installation of traffic signals contained in the latest edition of the *Manual on Uniform Traffic Control Devices* (MUTCD).

For the purposes of the Signal Warrant Analysis, SR 46 was considered the major street and North Carpenter Road / Project Driveway the minor street. The analysis was performed under the existing conditions and 2020 Phase I for Love's Travel Plaza with a minimum 2% growth rate applied to the eastbound and westbound background traffic. The Traffic Trend Analysis sheet is included in Appendix C.

Based on the posted speed limit of 55 mph on SR 46, the seventy percent (70%) volume criterion was applied to the analysis. The signal warrant forms are included as Appendix D and Appendix E. Before the project construction, a traffic signal is warranted at this intersection. Thus, it is recommended to install a signal before the project construction. Table 8 and Table 9 summarize the results of the analyses during the study hours:

Table 8
Summary of Signal Warrant Analysis – Existing Conditions
SR 46 and North Carpenter Road TSWS

	Warrant	Applicable	Satisfied	Comments
1A	Minimum Vehicular Volume	Yes	No	Warrant is not satisfied.
1B	Interruption of Continuous Traffic	Yes	Yes	Warrant is not satisfied.
2	Four-Hour Vehicular Volume	Yes	Yes	Warrant is satisfied.
3A	Peak-Hour Delay	No	No	This warrant is not applicable.
3B	Peak-Hour Volume	No	No	This warrant is not applicable.
4	Pedestrian Volume	No	No	This warrant is not applicable.
5	School Crossing	No	No	This warrant is not applicable.
6	Coordinated Signal System	No	No	No adjacent traffic signal system.
7	Crash Experience	No	No	This warrant was not evaluated.
8	Roadway Network	No	No	This warrant is not applicable.

Table 9
Summary of Signal Warrant Analysis – Phase I Conditions
SR 46 and North Carpenter Road TSWS

	Warrant	Applicable	Satisfied	Comments
1A	Minimum Vehicular Volume	Yes	Yes	Warrant is satisfied.
1B	Interruption of Continuous Traffic	Yes	Yes	Warrant is satisfied.
2	Four-Hour Vehicular Volume	Yes	Yes	Warrant is satisfied.
3A	Peak-Hour Delay	No	No	This warrant is not applicable.
3B	Peak-Hour Volume	No	No	This warrant is not applicable.
4	Pedestrian Volume	No	No	This warrant is not applicable.
5	School Crossing	No	No	This warrant is not applicable.
6	Coordinated Signal System	No	No	No adjacent traffic signal system.
7	Crash Experience	No	No	This warrant was not evaluated.
8	Roadway Network	No	No	This warrant is not applicable.


RECOMMENDATIONS

Based on the results of the Signal Warrant Analyses and engineering judgment of projected trips at the proposed Love's Travel Plaza, the following recommendations were developed:

- A traffic signal is warranted at the intersection of SR 46 and North Carpenter Road.
- During the existing conditions the intersection meets Warrant 2: 4-Hour Vehicular Volume. The traffic volume on the major street is so heavy that the northbound approach suffers excessive delay or conflict in entering SR 46.
- During the Phase I conditions the intersection meets Warrant 1A: Minimum Vehicular Volume, Warrant 1B: Interruption of Continuous of Continuous Traffic, and Warrant 2: 4-Hour Vehicular Volume. The southbound approach experiences excessive delay.
- Within a 12-month period, from February 1, 2017, to February 1, 2018, there were 4 crashes (1 left-turn
 and 2 off-road collisions) reported at the study intersection that were susceptible to correction by the
 installation of a traffic signal.
- It is recommended to install a traffic signal during the existing conditions.

Appendices

Appendix A Preliminary Site Plan

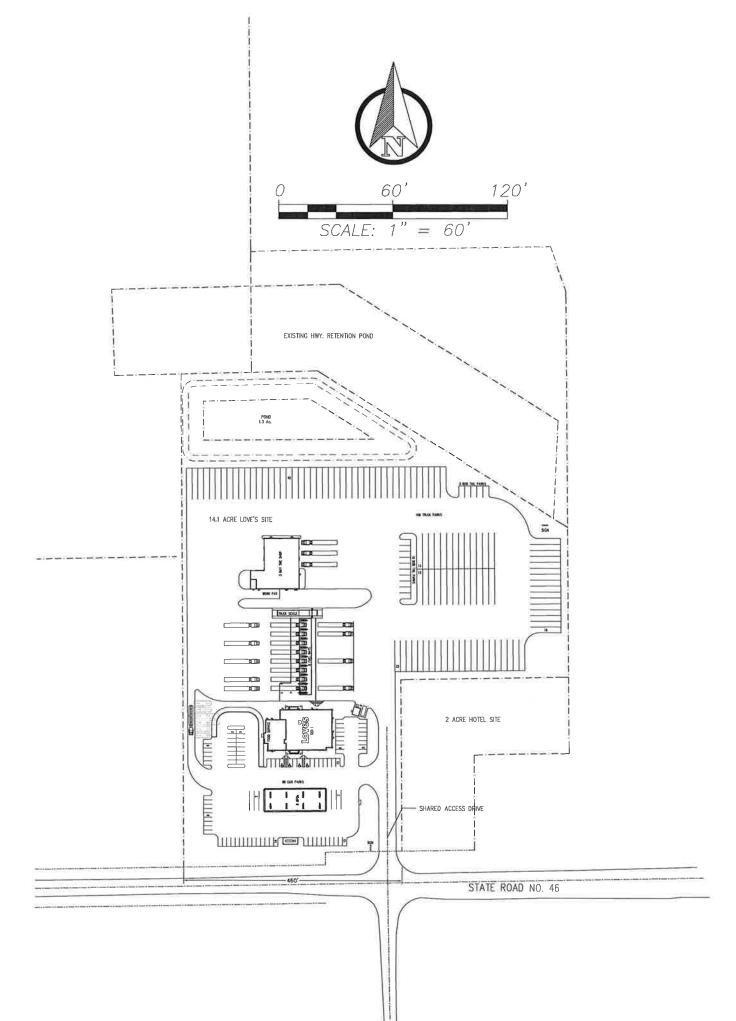

Appendix B

Raw Data Counts

DE TRAFFIC

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name: Carpenter at 46 Site Code: 00000001

Start Date : 10/10/2018

Page No :1

Groups Printed- Automobiles - Commercial

	Groups Printed- Automobiles - Commercial N/A SR 46 Carpenter Rd SR 46																
			I/A							Carper	nter Rd			SF	₹ 46		
			bound			West	bound			North	bound			East	bound		
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
07:00 AM	0	0	0	0	19	68	0	87	6	0	35	41	0	100	11	111	239
07:15 AM	0	0	0	0	15	80	0	95	1	0	30	31	0	105	5	110	236
07:30 AM	0	0	0	0	18	67	0	85	4	0	43	47	0	112	3	115	247
07:45 AM	0	0	0	0	22	71	0	93	9	0	33	42	0	117	10	127	262
Total	0	0	0	0	74	286	0	360	20	0	141	161	0	434	29	463	984
08:00 AM	0	0	0	0	24	80	0	104	4	0	25	29	0	101	9	110	243
08:15 AM	0	0	0	0	13	54	0	67	5	0	20	25	0	83	2	85	177
08:30 AM	0	0	0	0	22	52	0	74	5	0	25	30	0	69	4	73	177
08:45 AM	0	0	0	0	11	46	0	57	6	0	20	26	0	83	4	87	170
Total	0	0	0	0	70	232	0	302	20	0	90	110	0	336	19	355	767
04:00 PM 04:15 PM 04:30 PM 04:45 PM	0 0 0	0 0 0	0 0 0	0 0	43 22 41 41	123 107 112 123	0 0 0	166 129 153 164	11 12 13	0 0 0	22 20 10 16	33 32 23 23	0 0 0	72 83 66 62	10 6 10 7	82 89 76 69	281 250 252 256
Total	0	0	0	0	147	465	Ö	612	43	ő	68	111	0	283	33	316	1039
05:00 PM	0	0	0	0	27	124	0	151	11	0	12	23	0	112	12	124	298
05:15 PM	0	0	0	0	32	160	0	192	3	0	11	14	0	96	8	104	310
05:30 PM	0	0	0	0	34	105	0	139	7	0	20	27	0	83	11	94	260
05:45 PM	0	0	0	0	41	106	0	147	3	0	13	16	0	94	13	107	270
Total	0	0	0	0	134	495	0	629	24	0	56	80	0	385	44	429	1138
Grand Total	0	0	0	0	425	1478	0	1903	107	0	355	462	0	1438	125	1563	3928
Apprch %	0	0	0		22.3	77.7	0		23.2	0	76.8		0	92	8		
Total %	0	0	0	0	10.8	37.6	0	48.4	2.7	0	9	11.8	0	36.6	3.2	39.8	

DE TRAFFIC

http://de-traffic.com
Carpenter Rd at SR 46
Brevard County, FL

File Name: Carpenter at 46 Site Code: 00000001

Start Date : 10/10/2018

Page No : 2

Groups Printed- Automobiles - Commercial

								o- Automor	711 0 3 - CC	ATTITUO CI CIG	21				R 46		
		N	l/A		SR 46				Carpenter Rd								
	Southbound				Westbound				Northbound								
	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
Automobiles	0	0	0	0	411	1446	0	1857	107	0	347	454	0	1393	118	1511	3822
% Automobiles	0	0	0	0	96.7	97.8	0	97.6	100	0	97.7	98.3	0	96.9	94.4	96.7	97.3
Commercial	0	0	0	0	14	32	0	46	0	0	8	8	0	45	7	52	106
% Commercial	0	0	0	0	3.3	2.2	0	2.4	0	0	2.3	1.7	0	3.1	5.6	3.3	2.7

DE TRAFFIC

http::de-traffic,com
Carpenter Rd at SR 46
Brevard County, FL


File Name : Carpenter at 46 Site Code : 00000001

Start Date : 10/10/2018 Page No : 3

		N/			SR 46 Westbound				Carpenter Rd Northbound								
		South	bound										Eastbound				
Start Time	Left	Thru	Right	pp. Total	Left	Thru	Right	App. Total	Left	Thru	Right /	pp. Total	Left	Thru	Right /	App. Total	Int. Total
Peak Hour Analys	is From (7:00 AM	I to 08:45	AM - Pea	k 1 of 1							***		-		4.3	
Peak Hour for Ent	ire Inters	ection Be	egins at 0	7:15 AM													
07:15 AM	0	0	0	0	15	80	0	95	1	0	30	31	0	105	5	110	236
07:30 AM	0	0	0	0	18	67	0	85	4	0	43	47	0	112	3	115	247
07:45 AM	0	0	0	0	22	71	0	. 93	9	0	33	42	0	117	10	127	262
08:00 AM	0	0	0	0	24	80	0	104	4	0	25	29	0	101	9	110	243
Total Volume	0	0	0	0	79	298	0	377	18	0	131	149	0	435	27	462	988
% App. Total	0	0	0		21	79	- 0		12.1	0	87.9		0	94.2	5.8		
PHF	.000	.000	.000	.000	.823	.931	.000	.906	.500	.000	.762	.793	.000	.929	.675	.909	.943
Automobiles	0	0	0	0	72	289	0	361	18	0	127	145	0	416	23	439	945
% Automobiles	0	0	0	0	91.1	97.0	0	95.8	100	0	96.9	97.3	0	95.6	85.2	95.0	95.6
Commercial	0	0	0	0	7	9	0	16	0	0	4	4	0	19	4	23	43
% Commercial	0	0	0	0	8.9	3.0	0	4.2	0	0	3.1	2.7	0	4.4	14.8	5.0	4.4

DE TRAFFIC

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

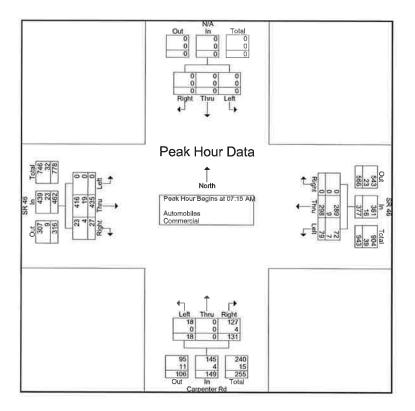

File Name : Carpenter at 46

Site Code : 00000001 Start Date : 10/10/2018
Page No : 4

DE TRAFFIC

http::de-traffic.com
Carpenter Rd at SR 46
Brevard County, FL

File Name: Carpenter at 46 Site Code: 00000001

Start Date : 10/10/2018


Page No : 5

			/A			SR	46			Carpe	nter Rd			SF	R 46		
		South	bound			West	bound			North	bound			East	oound		
Start Time	Left	Thru	Right A	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right A	pp Total	Int. Total
Peak Hour Analys	is From C	4:00 PN	1 to 05:45	PM - Pe	ak 1 of 1												
Peak Hour for Ent	ire Interse	ection Be	egins at 0	5:00 PM													
05:00 PM	0	0	0	0	27	124	0	151	11	0	12	23	0	112	12	124	298
05:15 PM	0	0	0	0	32	160	0	192	3	0	11	14	0	96	8	104	310
05:30 PM	0	0	0	0	34	105	0	139	7	0	20	27	0	83	11	94	260
05:45 PM	0	0	0	0	41	106	0	147	3	0	13	16	0	94	13	107	270
Total Volume	0	0	0	0	134	495	0	629	24	0	56	80	0	385	44	429	1138
% App. Total	0	0	0		21.3	78.7	0		30	0	70		0	89.7	10.3		
PHF	.000	.000	.000	.000	.817	.773	.000	.819	.545	.000	.700	.741	.000	.859	.846	.865	.918
Automobiles	0	0	0	0	132	490	0	622	24	0	55	79	0	381	44	425	1126
% Automobiles	0	0	0	0	98.5	99.0	0	98.9	100	0	98.2	98.8	0	99.0	100	99.1	98.9
Commercial	0	0	0	0	2	5	0	7	0	0	1	1	0	4	0	4	12
% Commercial	0	0	0	0	1.5	1.0	0	1,1	0	0	1.8	1.3	0	1.0	0	0.9	1.1

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name : Carpenter at 46 Site Code : 00000001 Start Date : 10/10/2018

Page No : 6

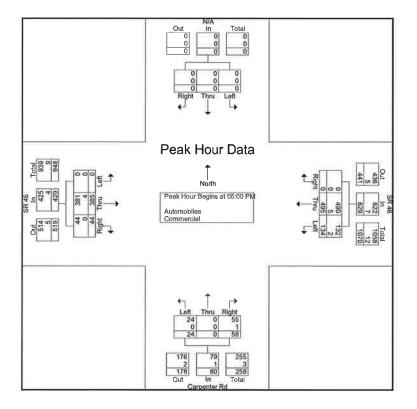



NB Approach





WB Approach



Carpenter Rd at SR 46

Brevard County

www.de-traffic.com 299 McGregor Rd. DeLand Fl. 32720

Sheet Number: 1

Project Number: L18-66

DE TRAFFIC

http:de-traffic.com
Carpenter Rd at SR 46
Brevard County, FL

File Name: SR 46 at Carpenter Site Code: 00000001

Start Date : 11/14/2018

Page No : 1

Groups Printed- Automobiles - Commercial

									- Automo	biles - Co	mmercia							
				/A			SR	46			Carpei	nter Rd			SR	46		
				bound			West	bound			North	bound		Eastbound				
S	Start Time	Left	Thru	Right	App. Total	Left	Thru	Right A	App. Total	Left	Thru	Right A	pp. Total	Left	Thru	Right A	pp. Total	Int. Total
	09:00 AM	0	0	0	0	12	45	0	57	6	0	7	13	0	56	1	57	127
Ĩ	09:15 AM	0	0	0	0	13	37	0	50	10	0	4	14	0	54	2	56	120
(09:30 AM	0	0	0	0	17	44	0	61	13	0	6	19	0	66	2	68	148
(09:45 AM	0	0	0	0	12	39	0	51	11	0	12	23	0	73	2	75	149
	Total	0	0	0	0	54	165	0	219	40	0	29	69	0	249	7	256	544
	10:00 AM	0	0	0	0	21	48	0	69	10	0	12	22	0	70	4	74	165
	10:15 AM	0	0	0	0	14	60	0	74	8	0	16	24	0	66	8	74	172
	10:30 AM	0	0	0	0	15	37	0	52	3	0	12	15	0	69	4	73	140
	10:45 AM	0	0	0	0	18	47	0	65	8	0	15	23	0	90	8	98	186
,	Total	0	0	0	0	68	192	0	260	29	0	55	84	0	295	24	319	663
	11:00 AM	0	0	0	0	16	50	0	66	2	0	9	11]	0	74	8	82	159
	11:15 AM	0	0	0	0	15	50	0	65	5	0	13	18	0	56	5	61	144
	11:30 AM	0	0	0	0	18	59	0	77	5	0	12	17	0	66	7	73	167
	11:45 AM	0	0	0	0	18	66	0	84	4	0	12	16	0	51	8	59	159
	Total	0	0	0	0	67	225	0	292	16	0	46	62	0	247	28	275	629
	12:00 PM	0	0	0	0	18	90	0	108	3	0	13	16	0	64	1	65	189
	12:15 PM	0	0	0	0	20	60	0	80	4	0	18	22	0	72	8	80	182
	12:30 PM	0	0	0	0	17	78	0	95	5	0	13.	18	0	61	7	68	181
	12:45 PM	0	0	0	0	30	57	0	87	5	0	20	25	0	75	4	79	191
	Total	0	0	0	0	85	285	0	370	17	0	64	81	0	272	20	292	743
	01:00 PM	0	0	0	0	16	78	0	94	3	0	15	18	0	65	4	69	181
(01:15 PM	0	0	0	0	29	84	0	113	5	0	15	20	0	66	5	71	204

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name: SR 46 at Carpenter Site Code: 00000001 Start Date: 11/14/2018 Page No: 2

Groupe	Drintod-	Automobiles	- Commercial
Groups	Frintea-	Automobiles	- Commerciai

								d- Automo	oiles - Co	mmercia							
		N.					₹ 46				iter Rd			SF	₹ 46		
		South					bound			North				Eastl	oound		
Start Time	Left	Thru	Right Ap	op. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
01:30 PM	0	0	0	0	11	53	0	64	8	0	11	19	0	62	8	70	153
01:45 PM	0	0	0	0	19	77	0	96	5	0	19	24	0	70	8	78	198
Total	0	0	0	0	75	292	0	367	21	0	60	81	0	263	25	288	736
00.00 Dtd				- 0				1					_				0
02:00 PM	0	0	0	0	19	76	0	95	5	0	13	18	0	72	7	79	192
02:15 PM	0	0	0	0	15	100	0	115	3	0	12	15	0	57	1	58	188
02:30 PM	0	0	0	0	21	79	0	100	2	0	14	16	0	66	7	73	189
02:45 PM	0	0	0	0	31	94	0	125	6	0	26	32	0	79	6	85	242
Total	0	0	0	0	86	349	0	435	16	0	65	81	0	274	21	295	811
03:00 PM	0	0	0	01	26	100	0	126	5	0	17	22	0	52	2	54	202
03:15 PM	0	ő	0	ő	17	94	0	111	2	ñ	16	18	0	64	3	67	196
03:30 PM	0	0	Õ	0	18	90	0	108	5	0	11	16	0	77	5	82	206
03:45 PM	0	0	0	ő	22	78	0	100	4	0	17	21	0	85	2	87	208
Total	0	0	0	0	83	362	0	445	16	0	61	77	0	278	12	290	812
Total		v	Ü	0,1	00	002	Ū	445	10		01	1664	8	210	Į! Z	230	012
06:00 PM	0	0	0	01	24	100	0	124	2	0	11	13	0	83	4	87	224
06:15 PM	0	0	0	ōl	16	103	Ō	119	2	0	16	18	Õ	77	3	80	217
06:30 PM	0	0	0	اه	11	126	Ō	137	5	ñ	18	23	ñ	86	4	90	250
06:45 PM	0	0	0	ō	17	106	0	123	4	0	10	14	Ö	78	2	80	217
Total	0	0	0	0	68	435	0	503	13	0	55	68	0	324	13	337	908
Grand Total	0			0.1	E00	0005		0004	400		405		_				
	0	0	0	0	586	2305	0	2891	168	0	435	603	0	2202	150	2352	5846
Apprch %	0	0	0		20.3	79.7	0		27.9	0	72.1		0	93.6	6.4		
Total %	0	0	0	0	10	39.4	0	49.5	2.9	0	7.4	10.3	0	37.7	2.6	40.2	
Automobiles	0	0	0	0	563	2213	0	2776	167	0	424	591	0	2133	142	2275	5642
% Automobiles	0	0	0	0	96.1	96	0	96	99.4	0	97.5	98	0	96.9	94.7	96.7	96.5
Commercial	0	0	0	0	23	92	0	115	1	0	11	12	0	69	8	77	204
% Commercial	0	0	0	0	3.9	4	0	4	0.6	0	2.5	2	0	3.1	5.3	3.3	3.5

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name: SR 46 at Carpenter Site Code: 00000001 Start Date: 11/14/2018


Page No : 3

		N.	/A			SR	46			Carper	nter Rd	T		SR	46		
		South	bound			Westl	bound			North	bound			Easth	ound		
Start Time	Left	Thru	Right	pp. Total	Left	Thru	Right	App. Total	Left	Thru	Right A	pp. Total	Left	Thru	Right	pp. Total	int. Total
Peak Hour Analys	is From 0	9:00 AN	1 to 11:45	AM - Pea	k 1 of 1												
Peak Hour for Ent	ire Interse	ection Be	egins at 1	0:00 AM													
10:00 AM	0	0	0	0	21	48	0	69	10	0	12	22	0	70	4	74	165
10:15 AM	0	0	0	0	14	60	0	74	8	0	16	24	0	66	8	74	172
10:30 AM	0	0	0	0	15	37	0	52	3	0	12	15	0	69	4	73	140
10:45 AM	0	0	0	0	18	47	0	65	8	0	15	23	0	90	8	98	186
Total Volume	0	0	0	0	68	192	0	260	29	0	55	84	0	295	24	319	663
% App. Total	0	0	0		26.2	73.8	0		34.5	0	65.5		0	92.5	7.5		
PHF	.000	.000	.000	.000	.810	.800	.000	.878	.725	.000	.859	.875	.000	.819	.750	.814	.891
Automobiles	0	0	0	0	63	182	0	245	29	0	54	83	0	281	24	305	633
% Automobiles	0	0	0	0	92.6	94.8	0	94.2	100	0	98.2	98.8	0	95.3	100	95.6	95.5
Commercial	0	0	0	0	5	10	0	15	0	0	1	1	0	14	0	14	30
% Commercial	0	0	0	0	7.4	5.2	0	5.8	0	0	1.8	1.2	0	4.7	0	4.4	4.5

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name: SR 46 at Carpenter Site Code: 00000001

Start Date : 11/14/2018 Page No : 4

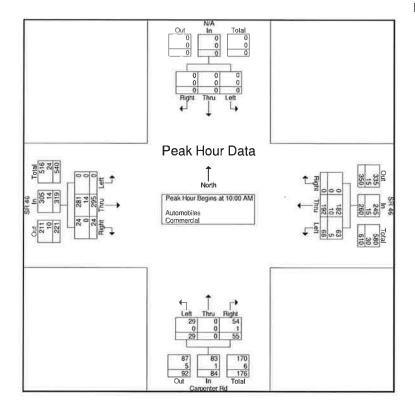

DE TRAFFIC

http::de-traffic.com
Carpenter Rd at SR 46
Brevard County, FL

File Name: SR 46 at Carpenter Site Code: 00000001

Start Date : 11/14/2018 Page No : 5


		N/				SF	46			Carpe	nter Rd			SR	46		
		South	oound			West	bound			North	bound			Easth	oound		
Start Time	Left	Thru	Right A	pp. Total	Left	Thru	Right /	App. Total	Left	Thru	Right A	App. Total	Left	Thru	Right	pp. Total	Int. Total
Peak Hour Analys	is From 1	2:00 PM	to 06:45	PM - Pea	k 1 of 1												
Peak Hour for Ent	ire Inters	ection Be	egins at 0	6:00 PM													
06:00 PM	0	0	0	0	24	100	0	124	2	0	11	13	0	83	4	87	224
06:15 PM	0	0	0	0	16	103	0	119	2	0	16	18	0	77	3	80	217
06:30 PM	0	0	0	0	11	126	0	137	5	0	18	23	0	86	4	90	250
06:45 PM	0	0	0	0	17	106	0	123	4	0	10	14	0	78	2	80	217
Total Volume	0	0	0	0	68	435	0	503	13	0	55	68	0	324	13	337	908
% App. Total	0	0	0		13.5	86.5	0		19.1	0	80.9		0	96.1	3.9		
PHF	.000	.000	.000	.000	.708	.863	.000	.918	.650	.000	.764	.739	.000	.942	.813	.936	.908
Automobiles	0	0	0	0	66	427	0	493	13	0	55	68	0	316	11	327	888
% Automobiles	0	0	0	0	97.1	98.2	0	98.0	100	0	100	100	0	97.5	84.6	97.0	97.8
Commercial	0	0	0	0	2	8	0	10	0	0	0	0	0	8	2	10	20
% Commercial	0	0	0	0	2.9	1.8	0	2.0	0	0	0	0	0	2.5	15.4	3.0	2.2

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name : SR 46 at Carpenter Site Code : 00000001

Start Date : 11/14/2018

Page No : 6

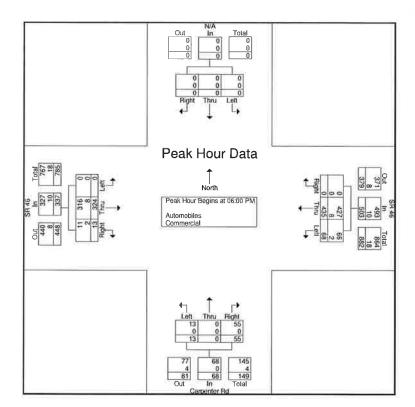

Machine #: NB

Site ID: NB

Location: Carpenter Rd NB south of SR 46

TIME	1 NORTH	Total
	NONTH	
01:00	2	2
02:00	5	5
03:00	3	3
04:00	7	7
05:00	12	12
06:00	53	53
07:00	117	117
08:00	151	151
09:00	120	120
10:00	83	83
11:00	90	90
12:00	86	86
13:00	80	80
14:00	80	80
15:00	96	96
16:00	98	98
17:00	107	107
18:00	80	80
19:00	72	72
20:00	61	61
21:00	25	25
22:00	24	24
23:00	15	15
24:00	8	8
AY TOTAL	1475	1475
ERCENTS	100.0	100
M Times	07:00	
M Peaks	161	
M Times M Peaks	16:00 113	

Machine #: NB

Site ID: NB Location: Carpenter Rd NB south of SR 46

	NORTH	Total
00:15	1	1
00:30	1	1
00:45	0	0
01:00	0	0
our Total	2	2
01:15	2	2
01:30	2	2
01:45	0	0
02:00	1	1
our Total	5	5
02:15	0	0
02:30	1	1
02:45	0	0
03:00	2	2
our Total	3	3
03:15	0	0
03:30	1	1
03:45	1	1
04:00	5	5
our Total	7	7
04:15	2	2
04:30	3	3
04:45	2	2
05:00	5	5
our Total	12	12
05:15	4	4
05:30	15	15
05:45	19	19
06:00	15	15
our Total	53	53
06:15	21	21
06:30	26	26
06:45	31	31
07:00	39	39
our Total	117	117
07:15	41	41
07:30	39	39
07:45	42	42
08:00	29	29
	151	151

Machine #: NB Site ID: NB Location: Carpenter Rd NB south of SR 46

08:15 08:30 08:30 08:45 08:45 08:45 09:00 26 26 cour Total 120 09:15 24 00:7 total 120 09:15 26 10:15 26 10:15 26 10:15 26 10:10 10:10 20 10:15 26 10:10 10:10 20 10:10 10:10 20 10:10 10:10 20 10:15 20 10:10 20 10:10 20 20 20 20 20 20 20 20 20 20 20 20 20	TIME	1 NORTH	Total
08:30			
08:45 09:00 26 09:00 26 09:00 120 09:15 24 09:30 16 09:45 19 10:00 24 24 00:00 10:15 26 00:15 26 00:15 19 19 10:00 24 26 10:15 26 10:15 26 26 10:10 10:15 26 26 10:30 24 24 10:45 21 11:00 19 19 10 10:17 10:15 26 27 28 11:18 29 10:17 10:18 20 11:15 24 24 11:30 24 24 11:30 24 11:45 29 12:10 12:10 12:10 12:10 13:10 18 18 12:45 22 22 14:10 13:30 18 18 18:12:45 22 22 14:10 19 19 100 100 100 100 100 100 100 100			
09:00 26 26 four Total 120 120 09:15 24 24 09:45 19 19 10:00 24 24 four Total 83 83 10:15 26 26 10:30 24 24 10:45 21 21 10:40 19 19 four Total 90 90 11:15 24 24 11:30 24 24 11:45 19 19 12:00 19 19 10ur Total 86 86 12:15 21 21 12:00 19 19 10ur Total 86 86 12:15 21 21 12:30 18 19 12:10 19 19 10ur Total 80 80 13:15 21 21 13:4:0 <td< td=""><td></td><td></td><td></td></td<>			
O9:15 24 24 09:30 16 16 09:45 19 19 10:00 24 24 10ur Total 83 83 10:15 26 26 10:30 24 24 10:45 21 21 11:00 19 19 10ur Total 90 90 11:15 24 24 11:30 24 24 11:45 19 19 12:00 19 19 12:10 19 19 12:15 21 21 12:30 18 18 12:45 22 22 13:30 18 18 13:45 22 22 14:10 19 19 10ur Total 80 80 14:15 18 18 14:10 19 19 16ur Total 80			
Sour Total 120	09:00		
09;30 16 16 09;45 19 19 10:00 24 24 Sour Total 83 83 10:15 26 26 10:30 24 24 10:45 21 21 11:00 19 19 10ur Total 90 90 11:15 24 24 11:45 24 24 11:45 19 19 12:10 19 19 10ur Total 86 86 12:15 21 21 12:30 18 18 12:45 22 22 13:00 19 19 10ur Total 80 80 13:15 21 21 13:30 18 18 13:45 22 22 14:10 19 19 10ur Total 80 80 13:45 22 22 14:10 24 24 14:30 24 24 14:30 24 24 14:45 29 29 15:10 26 26 15:15 24 <td>Hour Total</td> <td></td> <td>120</td>	Hour Total		120
09:45 19 19 10:00 24 24 iour Total 83 83 10:15 26 26 10:30 24 24 10:45 21 21 11:00 19 19 10ur Total 90 90 11:15 24 24 11:30 24 24 11:45 19 19 12:00 19 19 10ur Total 86 86 12:15 21 21 12:30 18 18 12:45 22 22 13:00 19 19 10ur Total 80 80 13:15 21 21 13:30 18 18 14:100 19 19 10ur Total 80 80 14:15 18 18 14:16 22 22 14:16 28 28 15:00 26 26 16ur Total 96 96 15:15 24 24 14:26 28 28 15:00 34 34			
10:00			
10:15			
10:15	10:00	24	24
10:30 10:30 10:45 10:45 11:00 10our Total 90 90 11:15 24 11:30 24 11:45 19 10our Total 86 86 12:15 12:30 18 18 12:45 22 13:00 19 19 10our Total 80 80 13:15 21 13:30 18 18 18 18 18 18 13:45 22 13:10 19 19 10our Total 80 80 13:15 21 21 13:30 18 18 18 18 18 19 19 19 10our Total 80 80 13:15 21 21 13:30 18 18 18 18 18 18 18 18 18 18 18 18 18	Hour Total	83	83
10145			26
11:00			
11:15			
Sour Total 90 90 90 90 90 90 90 9			19
11:30	Hour Total		90
11:45 19 19 12:00 19 19 10ur Total 86 86 12:15 21 21 12:30 18 18 12:45 22 22 13:00 19 19 10ur Total 80 80 13:15 21 21 13:30 18 18 13:45 22 22 14:00 19 19 10ur Total 80 80 14:15 18 18 14:45 24 24 14:45 28 28 15:00 26 26 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	11:15	24	24
12:00 19 19 Hour Total 86 86 12:15 21 21 12:30 18 18 12:45 22 22 13:00 19 19 Hour Total 80 80 13:15 21 21 13:30 18 18 13:45 22 22 14:00 19 19 Hour Total 80 80 14:15 18 18 14:30 24 24 14:45 28 28 15:00 26 26 Hour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	11:30	24	24
Section Sect	11:45	19	19
Nour Total 86 86 12:15 21 21 12:30 18 18 12:45 22 22 13:00 19 19 Nour Total 80 80 13:15 21 21 13:30 18 18 13:45 22 22 14:00 19 19 Nour Total 80 80 14:15 18 18 14:30 24 24 14:45 28 28 15:00 26 26 Nour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34			19
12:30 18 18 12:45 22 22 13:00 19 19 iour Total 80 80 13:15 21 21 13:30 18 18 13:45 22 22 14:00 19 19 10ur Total 80 80 14:15 18 18 14:30 24 24 14:45 28 28 15:00 26 26 1cur Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	Hour Total		86
12:45 22 13:00 19 Hour Total 80 13:15 21 13:30 18 13:45 22 14:00 19 Hour Total 80 80 80 14:15 18 14:30 24 14:45 28 15:00 26 15:15 24 15:30 19 15:45 21 16:00 34	12:15	21	21
13:00 19 19 19 19 19 19 19 19 19 19 19 19 19	12:30	18	18
Solution Solution	12:45	22	22
Sour Total 80 80 80 80 80 80 80 8	13:00	19	
13:30 18 18 13:45 22 22 14:00 19 19 Hour Total 80 80 14:15 18 18 14:30 24 24 14:45 28 28 15:00 26 26 Hour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	Hour Total	80	
13:45 22 14:00 19 19 19 19 19 10ur Total 80 14:15 18 14:30 24 14:45 28 15:00 26 15ur Total 96 15:15 24 15:30 19 15:45 21 16:00 34	13:15	21	21
14:00 19 Hour Total 80 14:15 18 14:30 24 14:45 28 15:00 26 15:15 24 15:30 19 15:45 21 16:00 34	13:30	18	18
14:15	13:45	22	22
14:15 18 18 14:30 24 24 14:45 28 28 15:00 26 26 Rour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	14:00		
14:30 24 14:45 28 15:00 26 26 26 15:15 24 15:30 19 15:45 21 16:00 34	Hour Total		
14:30 24 24 14:45 28 28 15:00 26 26 Rour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	14:15	18	18
14:45 28 28 15:00 26 26 Rour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	14:30	24	24
15:00 26 26 Rour Total 96 96 15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34	14:45	28	
15:15 24 24 15:30 19 19 15:45 21 21 16:00 34 34		26	26
15:30 19 19 15:45 21 21 16:00 34 34	Hour Total		
15:30 19 19 15:45 21 21 16:00 34 34	15:15	24	24
15:45 21 21 16:00 34 34	15:30	19	
16:00 34 34			
	16:00	34	34
	Hour Total		

Machine #: NB Site ID: NB

Location: Carpenter Rd NB south of SR 46

TIME	1 NORTH	Total
16:15	29	29
16:30	26	26
16:45	24	2 4
17:00	28	28
Hour Total	107	107
17:15	19	19
17:30	24	2 4
17:45	21	21
18:00	16	16
Hour Total	80	80
18:15	18	18
18:30	24	24
18:45	19	19
19:00	11	11
Hour Total	72	72
19:15	16	16
19:30	16	16
19:45	18	18
20:00	11	11
Hour Total	61	61
20:15	10	10
20:30	6	6
20:45	5	5
21:00	4	4
Hour Total	25	25
21:15	5	5
21:30	4	4
21:45	6	6
22:00	9	9
Hour Total	24	24
22:15	8	8
22:30	2	2
22:45	1	1
23:00	4	4
Hour Total	15	15
23:15	4	4
23:30	2	2
23:45	1	1
24:00	1	1
	8	0
LOUL TOTAL	O	8

Page: 4

VOLUME SUMMARY Wed 11/14/2018

Machine #: NB Site ID: NB Location: Carpenter Rd NB south of SR 46

TIME	1 NORTH	Total
DAY TOTAL	1475	1475
PERCENTS	100.0	100
AM Times	07:00	
AM Peaks	161	
PM Times	16:00	
PM Peaks	113	

Machine #: EB Site ID: EB Location: SR 46 EB west of Carpenter Rd

File: EB.prn Street Name: SR 46 EB County: Brevard

Page: 1

TIME	1 EAST	Total
01:00	13	13
02:00	16	16
03:00	21	21
04:00	23	23
05:00	75	75
06:00	257	257
07:00	394	394
08:00	462	462
09:00	318	318
10:00	273	273
11:00	336	336
12:00	275	275
13:00	303	303
14:00	295	295
15:00	281	281
16:00	319	319
17:00	336	336
18:00	383	383
19:00	326	326
20:00	210	210
21:00	154	154
22:00	114	114
23:00	55	55
24:00	29	29
AY TOTAL	5268	5268
ERCENTS	100.0	100
M Times	07:00	
M Peaks	465	
M Times M Peaks	17:00 414	

Machine #: EB Site ID: EB Location: SR 46 EB west of Carpenter Rd

TIME	1 EAST	Total
00:15	2	2
00:30	4	4
00:45 01:00	5 2	5 2
our Total	13	13
01:15	4	4
01:30	5	5
01:45	2	2
02:00	5	5
our Total	16	16
02:15	5	5
02:30	4	4
02:45	6	6
03:00	6	6
our Total	21	21
03:15	5	5
03:30	4	4
03:45	5	5
04:00	9	9
our Total	23	23
04:15	16	16
04:30	16	16
04:45	19	19
05:00	24	24
our Total	75	75
05:15	42	42
05:30	63	63
05:45	76	76
06:00	76	76
our Total	257	257
06:15	84	84
06:30	103	103
06:45	98	98
07:00	109	109
our Total	394	394
07:15	115	115
07:30	117	117
07:45	124	124
08:00	106	106
	462	462

Machine #: EB Site ID: EB

Location: SR 46 EB west of Carpenter Rd

TIME	1 EAST	Total
00.15		
08:15 08:30	95 78	95
08:45	7 o 8 4	78
09:00	61	84
	01	61
Hour Total	318	318
09:15	56	56
09:30	72	72
09:45	64	64
10:00	81	81
Hour Total	273	273
10.15	7.6	7.6
10:15 10:30	76	76
	81	81
10:45	98	98
11:00	81	81
Hour Total	336	336
11:15	76	76
11:30	72	72
11:45	63	63
12:00	64	64
Hour Total	275	275
12:15	75	75
12:30	81	81
12:45	76	76
13:00	71	71
Hour Total	303	303
12.15	7.0	
13:15	76	76
13:30	81	81
13:45	75	75
14:00	63	63
Hour Total	295	295
14:15	75	75
14:30	81	81
14:45	63	63
15:00	62	62
Hour Total	281	281
15:15	72	72
15:30	81	81
15:45	91	91
16:00	75	75
Hour Total	319	319

Machine #: EB Site ID: EB

Location: SR 46 EB west of Carpenter Rd

17:15	TIME	1 EAST	Total
16:30 76 76 76 16:45 16:45 64 17:00 115 115 115 115 115 115 115 115 115 1			
16:45 64 64 17:00 115 115 tour Total 336 336 17:15 106 106 17:30 99 99 17:45 94 94 18:00 84 84 18:10 76 76 18:33 383 383 18:15 76 76 18:30 84 84 19:45 91 91 19:00 75 75 1000 Total 326 326 19:15 52 52 19:30 64 64 19:45 52 52 20:00 42 42 20:10 21 21 20:15 35 35 20:30 42 42 20:45 25 25 21:00 52 52 100r Total 154 154 21:15 43 43 21:30 24 24 22:10 21 21 10ur Total 114 114 22:15 16 16 22:30 16 16 22:45			
17:00 115 115 10ur Total 336 336 17:15 106 106 17:30 99 99 17:45 94 94 18:00 84 84 10ur Total 383 383 18:15 76 76 18:30 84 84 18:45 91 91 19:00 75 75 10ur Total 326 326 19:15 52 52 19:30 64 64 19:45 52 52 19:45 52 52 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 210 220 10ur Total 154 154 115 21:15 26 26 22:200 21 21 10ur Total 114 114 114 122:15 16 16 18:22:45 11 11 19:23:00 10 10 10ur Total 55 55 123:30 8 8 123:30 8 8 123:315 9 9 123:330 8 8 123:45 7 7 124:00 5 5 10 10 10 10 10 10 10 10			
dour Total 336 336 17:15 106 106 17:30 99 99 18:00 84 84 18:00 84 84 4our Total 383 383 18:15 76 76 18:30 84 84 18:45 91 91 19:00 75 75 four Total 326 326 19:15 52 52 19:45 52 52 19:45 52 52 19:45 52 52 19:45 52 52 19:45 52 52 20:100 42 42 20:100 42 42 20:15 35 35 20:30 42 42 20:45 25 25 20:00 52 52 100rr Total 154 154 22:15 <td< td=""><td>17:00</td><td>115</td><td>115</td></td<>	17:00	115	115
17:30 17:45 18:00 84 84 84 84 84 84 84 84 84 84 84 84 84	Hour Total		
17:30 17:45 18:00 84 84 84 84 84 84 84 84 84 84 84 84 84	17:15	106	106
18:00 84 84 dour Total 383 383 18:15 76 76 18:30 84 84 18:45 91 91 19:00 75 75 dour Total 326 326 19:15 52 52 19:30 64 64 19:45 52 52 20:00 42 42 20:10 20 20 20:15 35 35 20:30 42 42 20:45 25 25 21:00 52 52 dour Total 154 154 21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 100r Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:10 10 10 100r Total 5 55 23:15 9 9 23:30 8 8 23:15 7 7 24:00 5 <td>17:30</td> <td>99</td> <td></td>	17:30	99	
18:15	17:45	94	94
Nour Total 383 384			
18:30 84 84 18:45 91 91 19:00 75 75 four Total 326 326 19:15 52 52 19:30 64 64 19:45 52 52 20:00 42 42 42 42 42 20:15 35 35 20:30 42 42 20:45 25 25 21:00 52 52 four Total 154 154 21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 8our Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 1our Total 55 55 23:15 9 9 23:30 8 8 23:345 7 7 24:00 5 5	Hour Total		
18:45 91 91 19:00 75 75 four Total 326 326 19:15 52 52 19:30 64 64 19:45 52 52 20:00 42 42 20:15 35 35 20:30 42 42 20:45 25 25 21:00 52 52 20:01 Total 154 154 21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 3cour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 1cour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	18:15	76	76
19:00 75	18:30	84	8 4
Hour Total 326 326 19:15 52 52 19:30 64 64 19:45 52 52 20:00 42 42 Hour Total 210 210 20:15 35 35 20:30 42 42 20:45 25 25 21:00 52 52 10ur Total 154 154 21:15 43 43 21:30 24 21:45 26 26 22:00 21 21 21 20ur Total 14 14 22:15 16 16 22:20 21 20ur Total 16 16 22:30 18 18 22:45 11 11 23:00 10 10 10 10 10 10 10 10 10 10	18:45	91	91
Sour Total 326	19:00		
19:30 64 19:45 52 20:00 42 42 Hour Total 210 20:15 35 35 20:30 42 20:45 25 21:00 52 Hour Total 154 21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 Hour Total 114 114 22:15 16 22:30 18 18 18 22:45 11 11 23:00 10 Hour Total 55 23:15 9 9 9 9 23:30 8 8 8 8 23:45 7 7 7 24:00 5 5	Hour Total		
19:45 20:00 42 42 42 44 Hour Total 210 20:15 35 20:30 42 20:45 21:00 52 21:00 52 42 42 42 42 42 42 42 42 42 42 42 42 42	19:15	52	52
20:00 42 Hour Total 210 20:15 35 20:30 42 20:45 25 21:00 52 Hour Total 154 21:15 43 21:30 24 21:45 26 22:00 21 30ur Total 114 42:15 16 22:30 18 22:45 11 23:00 10 10ur Total 55 55 55 23:15 9 23:30 8 23:45 7 24:00 5 5 5	19:30	64	64
Hour Total 210 20:15 35 20:30 42 20:45 25 21:00 52 Hour Total 154 21:15 43 21:45 26 22:00 21 21:45 26 22:00 21 21:15 16 22:30 18 22:45 11 23:00 10 10 10 10ur Total 55 55 55 23:15 9 23:30 8 23:45 7 24:00 5 5 5	19:45		52
Hour Total 210 20:15 35 20:30 42 20:45 25 21:00 52 Hour Total 154 21:15 43 21:30 24 21:45 26 22:00 21 Hour Total 114 22:5 26 22:00 21 Hour Total 114 22:30 18 22:45 11 23:00 10 Hour Total 55 40 55 23:15 9 23:30 8 23:45 7 24:00 5 5 5			
20:30 42 42 20:45 25 25 21:00 52 52 Hour Total 154 154 21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 Hour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	Hour Total		
20:45 25 25 21:00 52 52 Hour Total 154 154 21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 Hour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5			
21:00 52 52 52 60ur Total 154 154 154 154 21:15 43 43 24 24 24 21:45 26 26 26 22:00 21 21 21 30ur Total 114 114 114 122:15 16 16 16 22:30 18 18 22:45 11 11 23:00 10 10 30ur Total 55 55 55 33:15 9 9 9 9 23:30 8 23:45 7 7 7 24:00 5 5 55 55 55 55 55 5			
Hour Total			
21:15 43 43 21:30 24 24 21:45 26 26 22:00 21 21 Rour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5			
21:30 24 24 21:45 26 26 22:00 21 21 Hour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	Hour Total		154
21:45 26 26 22:00 21 21 Hour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	21:15	43	43
22:00 21 21 Hour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	21:30	24	24
Hour Total 114 114 22:15 16 16 16 22:30 18 18 18 18 11 11 11 11 11 11 11 11 11		26	
Hour Total 114 114 22:15 16 16 22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 9 23:30 8 8 23:45 7 24:00 5 5			
22:30 18 18 22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	Hour Total		
22:45 11 11 23:00 10 10 Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5			16
23:00 10 10 Hour Total 55 55 23:15 9 9 9 9 23:30 8 8 8 8 8 8 8 7 7 7 7 7 7 7 7 7 7 7 7			18
Hour Total 55 55 23:15 9 9 23:30 8 8 23:45 7 24:00 5 5	22:45		11
23:15 9 9 23:30 8 8 23:45 7 7 24:00 5 5	23:00	10	10
23:30 8 8 23:45 7 7 24:00 5 5	Hour Total	55	55
23:45 7 7 24:00 5 5	23:15	9	9
24:00 5 5		8	8
	23:45		
Hour Total 29 29	24:00	5	5
	Hour Total	29	29

Page: 4

Machine #: EB Site ID: EB Location: SR 46 EB west of Carpenter Rd

1	Total
EAST	
5268	5268
100.0	100
07:00	
465	
17.00	
414	
	5268 100.0 07:00 465 17:00

Machine #: WB Site ID: WB

Location: SR 46 WB east of Carpenter Rd

TIME	1	Total
	WEST	
01:00	34	34
02:00	20	20
03:00	5	5
04:00	27	27
05:00	64	64
06:00	214	214
07:00	278	278
08:00	382	382
09:00	283	283
10:00	242	242
11:00	234	234
12:00	319	319
13:00	366	366
14:00	378	378
15:00	481	481
16:00	498	498
17:00	592	592
18:00	635	635
19:00	488	488
20:00	400	400
21:00	274	274
22:00	105	105
23:00	47	47
24:00	53	53
Y TOTAL	6419	6419
RCENTS	100.0	100
Times	07:15	
Peaks	382	
Times	17:00	
Peaks	662	

Machine #: WB Site ID: WB Location: SR 46 WB east of Carpenter Rd

TIME	1 WEST	Total
00:15	6	6
00:30	9	9
00:45	8	8
01:00	11	11
Hour Total	34	34
01:15	8	8
01:30	7	7
01:45	4	4
02:00	1	1
Hour Total	20	20
02:15	2	2
02:30	1	1
02:45	2	2
03:00	0	0
Hour Total	5	5
03:15	0	0
03:30	2	2
03:45	9	9
04:00	16	16
Hour Total	27	27
04:15	9	9
04:30	15	15
04:45	16	16
05:00	24	24
Hour Total	64	64
05:15	52	52
05:30	46	46
05:45	53	53
06:00	63	63
Hour Total	214	214
06:15	72	72
06:30	51	51
06:45	72	72
07:00	83	83
Hour Total	278	278
07:15	95	95
07:30	87	87
07:45	91	91
08:00	109	109
Hour Total	382	382

Machine #: WB

Site ID: WB Location: SR 46 WB east of Carpenter Rd

File: WB.prn Street Name: SR 46 WB

County: Brevard

TIME	1 WEST	Total
08:15	76	76
08:30	81	81
08:45	63	63
09:00	63	63
lour Total	283	283
09:15	51	51
09:30	56	56
09:45	63	63
10:00	72	72
lour Total	242	242
10:15	65	65
10:30	54	54
10:45	52	52
11:00	63	63
Hour Total	234	234
11:15	64	64
11:30	71	71
11:45	81	81
12:00	103	103
our Total	319	319
12:15	81	81
12:30	99	99
12:45	91	91
13:00	95	95
our Total	366	366
13:15	109	109
13:30	72	72
13:45	99	99
14:00	98	98
our Total	378	378
14:15	106	106
14:30	116	116
14:45	125	125
15:00	134	134
our Total	481	481
15;15	106	106
15:30	115	115
15:45	106	106
16:00	171	171
our Total	498	498

Machine #: WB

Site ID: WB

Location: SR 46 WB east of Carpenter Rd

TIME	1 WEST	Total
	MES I	
16:15	135	135
16:30	154	154
16:45	142	142
17:00	161	161
Hour Total	592	592
17:15	187	187
17:30	151	151
17:45	163	163
18:00	134	134
Hour Total	635	635
18:15	109	109
18:30	141	141
18:45	135	135
19:00	103	103
Hour Total	488	488
19:15	115	115
19:30	103	103
19:45	98	98
20:00	84	84
Hour Total	400	400
20:15	75	75
20:30	84	84
20:45	52	52
21:00	63	63
Hour Total	274	274
21:15	34	34
21:30	26	26
21:45	24	24
22:00	21	21
Hour Total	105	105
22:15	16	16
22:30	11	11
22:45	9	9
23:00	11	11
Hour Total	47	47
23:15	13	13
23:30	18	18
23:45	13	13
24:00	9	9
Hour Total	53	53

Page: 4


Machine #: WB Site ID: WB Location: SR 46 WB east of Carpenter Rd

TIME	1 WEST	Total
DAY TOTAL	6419	6419
PERCENTS	100.0	100
AM Times	07:15	
AM Peaks	382	
PM Times	17:00	
PM Peaks	662	

Appendix C Traffic Trend Analysis Sheet

TRAFFIC TRENDS
SR 46 -- SR 46 from Fawn Lake Blvd to I-95

Brevard
200
SR 46

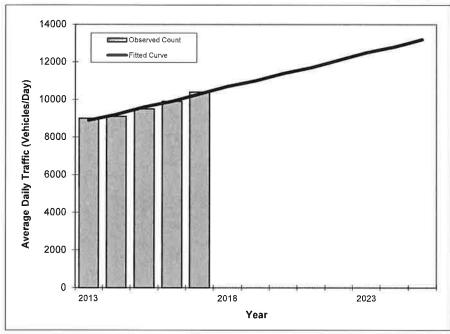

_	Traffic (ADT/AADT)	
Year	Count*	Trend**
2013	9000	8900
2014	9100	9200
2015	9500	9600
2016	9900	9900
2017	10400	10300
201 2018	8 Opening Yea	10700
	N/A 019 Mid-Year T	
2019	N/A	11000
	20 Design Year	
2020	N/A	11400
TRAN	PLAN Forecas	ts/Trends

** Annual Trend Increase:	360
Annual Trend increase:	
Trend R-squared:	96.1%
Trend Annual Historic Growth Rate:	3.93%
Trend Growth Rate (2017 to Design Year):	3.56%
Printed:	16-Nov-18
Straight Line Growth Option	


*Axle-Adjusted

TRAFFIC TRENDS SR 46 -- SR 46 from I-95 to US 1

 County:
 Brevard

 Station #:
 200

 Highway:
 SR 46

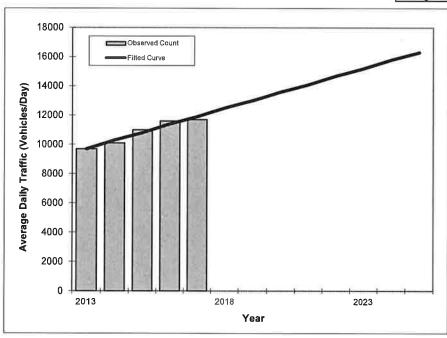


	Traffic (ADT/AADT)				
Year	Count*	Trend**			
2013	9700	9700			
2014	10100	10300			
2015	11000	10800			
2016	11600	11400			
2017	11700	11900			
		1			
201	8 Opening Yea	r Trend			
2018	N/A	12500			
	019 Mid-Year T				
2019	N/A	13000			
202	20 Design Year				
2020	N/A	13600			
TRAN	PLAN Forecas	ts/Trends			

** Annual Trend Increase:	550
Trend R-squared:	94.9%
Trend Annual Historic Growth Rate:	5.67%
Trend Growth Rate (2017 to Design Year):	4.76%
Printed:	16-Nov-18
Straight Line Growth Option	1000

*Axle-Adjusted

TRAFFIC TRENDS N Carpenter Rd -- N Carpenter Rd from Dairy Rd to SR 46

County: Brevard
Station #: 183
Highway: N Carpenter Rd

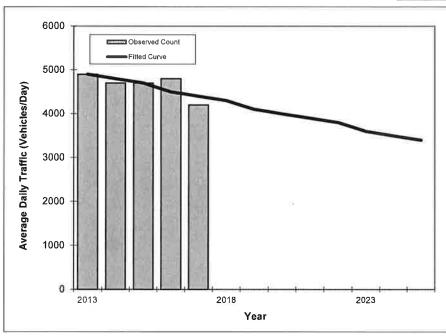

	Traffic (ADT/AADT)					
Year	Count*	Trend**				
2013	4900	4900				
2014	4700	4800				
2015	4700	4700				
2016	4800	4500				
2017	4200	4400				
	1					
201	8 Opening Yea	r Trend				
2018	N/A	4300				
2	019 Mid-Year ⊺	rend				
2019	N/A	4100				
	20 Design Year					
2020	N/A	4000				
TRAN	PLAN Forecas	ts/Trends				

** Annual Trend Increase:	-130
Trend R-squared:	57.9%
Trend Annual Historic Growth Rate:	-2.55%
Trend Growth Rate (2017 to Design Year):	-3.03%
Printed:	16-Nov-18
Straight Line Growth Option	U A. Mieck

*Axle-Adjusted

Appendix D

Traffic Signal Warrants – Existing Conditions

			TRA	State				nt of Trans		MARY		TRAFFIC ENG	INEERING 10/15
City County Distric	/:		Mims - Bre Five	s vard					ngineer: _ Date: _		ACP February 12, 2	2019	
Major Stree	t:			SR 46 Carpente		02	2 0	Li	anes: 1	Mi	ajor Approach inor Approach		55 40
MUTCD Electr	onic R	eference to	Chapt	ter 4: <u>httr</u>	://mutce	d.fhwa	.dot.go	v/pdfs/20	09r1r2/par	t4.pdf			
2. Is the in	osted ntersed	i <u>a</u> speed or 85i ction in a buil vel may be u	lt-up a	area of an i	solated	comm	unity w	ith a pop	ulation < 1	0,000?	Yes Yes 70%	☐ No ☑ No ☐ 100%	
Condition	Wa ly be a A - M A is int	GHT-HOU Trant 1 is sa Warrant 1 is pplied after Inimum Veh Tended for ago is the prince	tisfied s also an ad nicula	I if Condition satisfied if lequate tria inconveni r Volume tion at loca	nn A or (both Co il of othe ence to tions wh	Condition ondition or alter traffic nere a	ion B is n A and rnatives has fai large v	d Conditions that could be solved to	n B are "8 d cause le ve the trafi 10	0%" satisfi	ed Yes ed: Yes ed: Yes	✓ No ✓ No ✓ No ✓ No ✓ No ✓ No	
II .		es for movi	ոց		per hou t (total o	of bot				ır on mino ction only			
Major	r	Minor		100%ª	80%	· [70% ^c	100%ª	80%b	70%°	;		
1		1		500	400		350	150	120	105			
2 or mo	_	1		600	480		420	150	120	105			
2 or mo	re	2 or more	—⊩	600	480		420	200	160	140	_		
^b Used for co ^c May be use	ombina ed whe	2 or more curly volume tion of Condition the major-st ours and the	ons A reet sr	peed exceed	is 40 mp	h or in	an isola	ted commu	inity with a		of less than 10,0	00	
				ght Highes				12. 13.07.10.0		200010 0110			
Street	7:00 AM	8:00 AM	12:00 PM	2:00 PM	3:00 PM	4:00 PM	5:00 PM	6:00 PM					

	Eight Highest Hours								
Street	7:00 AM	8:00 AM	12:00 PM	2:00 PM	3:00 PM	4:00 PM	5:00 PM	6:00 PM	
Major	823	657	662	730	735	928	1,058	840	
Minor	161	110	81	81	77	111	80	68	

Existing Volumes

State of Florida Department of Transportation

TRAFFIC SIGNAL WARRANT SUMMARY

Condition B - Interruption of Continuous Traffic	Applicable:	✓ Yes	☐ No
Condition B is intended for application where Condition A is not satisfied and the	100% Satisfied:	Yes	✓ No
traffic volume on a major street is so heavy that traffic on the minor intersecting	80% Satisfied:	✓ Yes	☐ No
street suffers excessive delay or conflict in entering or crossing the major street.	70% Satisfied:	✓ Yes	Пио

Number of Lar traffic on ea	nes for moving ch approach	Vehicles per hour on major- street (total of both approaches)			Vehicles per hour on minor- street (one direction only)			
Мајог	Minor	100% ^a	80% ^b	70%°	100%ª	80% ^b	70%°	
1	1	750	600	525	75	60	53	
2 or more	1	900	720	630	75	60	53	
2 or more	2 or more	900	720	630	100	80	70	
1	2 or more	750	600	525	100	80	70	

^a Basic Minimum hourly volume

Record 8 highest hours and the corresponding major-street and minor-street volumes in the Instructions Sheet.

	Eight Highest Hours								
Street	7:00 AM	8:00 AM	12:00 PM	2:00 PM	3:00 PM	4:00 PM	5:00 PM	6:00 PM	
Major	823	657	662	730	735	928	1,058	840	
Minor	161	110	81	81	77	111	80	68	

Existing Volumes

^b Used for combination of Conditions A and B after adequate trial of other remedial measures

^c May be used when the major-street speed exceeds 40 mph or in an isolated community with a population of less than 10,000

State of Florida Department of Transportation

Form 750-020-01 TRAFFIC ENGINEERING 10/15

40

TRAFFIC SIGNAL WARRANT SUMMARY

City:	Mims	Engineer:	ACP	
County:	70 - Brevard	Date:	February 11, 2019	
District:	Five	*		
Major Street:	SR 46	Lanes: 1	Maior Approach Speed:	55

MUTCD Electronic Reference to Chapter 4: http://mutcd.fhwa.dot.gov/pdfs/2009r1r2/part4.pdf

N Carpenter Rd

Volume Level Criteria

Minor Street:

- 1. Is the posted speed or 85th-percentile of major street > 40 mph (70 km/h)?
- 2. Is the intersection in a built-up area of an isolated community with a population < 10,000?
- "70%" volume level may be used if Question 1 or 2 above is answered "Yes"

✓ Yes	No
Yes	✓ No

✓ Yes No

WARRANT 2 - FOUR-HOUR VEHICULAR VOLUME

If all four points lie above the appropriate line, then the warrant is satisfied.

Applicable: Satisfied:

✓ Yes 🗌 No

Minor Approach Speed:


✓ Yes No

100% Volume Level

Four	Volumes				
Highest Hours	Major Street	Minor Street			
7:00 AM	823	161			
4:00 PM	928	111			
5:00 PM	1058	80			
6:00 PM	840	68			

Plot four volume combinations on the applicable figure below.

Lanes:

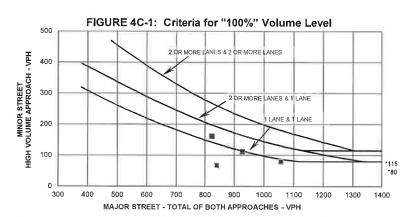


* Note: 115 vph applies as the lower threshold volume for a minor street approach with two or more lanes and 80 vph applies as the lower threshold volume threshold for a minor street approach with one lane.

70% Volume Level

Four	Volu	ımes
Highest Hours	Major Street	Minor Street
7:00 AM	823	161
4:00 PM	928	111
5:00 PM	1058	80
6:00 PM	840	68

FIGURE 4C-2: Criteria for "70%" Volume Level



* Note: 80 vph applies as the lower threshold volume for a minor street approach with two or more lanes and 60 vph applies as the lower threshold volume threshold for a minor street approach with one lane.

Appendix E

Traffic Signal Warrants – Phase I Conditions

Form 750-020-01 IC ENGINEERING 10/15

Citv:									
County	Mii 70 – B				En	gineer: Date:	E-L	ACP oruary 11, 2	010
District:						Date	ret	oruary 11, 2	019
Major Street: Minor Street:		SR 46 N Carpente	r Rd			nes: 1		r Approach : r Approach :	
TCD Electronic I	Reference to Cha	pter 4: http	o://mutcd.fl	nwa.dot.go	v/pdfs/2009	9r1r2/part4	<u>pdf</u>		
ume Level Crite	eria.								
1. Is the posted	l speed or 85th-p	ercentile of r	najor stree	t > 40 mph	(70 km/h)?	?		✓ Yes	☐ No
2. Is the interse	ection in a built-up	area of an i	solated co	mmunity w	th a popul	ation < 10,	000?	Yes	✓ No
"70%" volume le	evel may be used	I if Question	1 or 2 abo	ve is answ	ered "Yes"			70%	100%
	<u> Minimum Vehicu</u>	iar voiume			ed to solve		,, :		
Condition A is in	ntended for applic fic is the principal	cation at loca		_	olume of	100%	% Satisfied: % Satisfied: % Satisfied:	✓ Yes ✓ Yes ✓ Yes	No No No
Condition A is in intersecting traff signal.	ntended for applic	vation at local reason to co Vehicles stree		n major-	olume of ffic control	100%	% Satisfied: % Satisfied: % Satisfied:	✓ Yes	□ No
Condition A is in intersecting traff signal.	ntended for applic fic is the principal	vation at local reason to co Vehicles stree	per hour o	n major-	olume of ffic control	100% 80% 70% per hour	% Satisfied: % Satisfied: % Satisfied:	✓ Yes	□ No
Condition A is in intersecting traff signal. Number of Lateral traffic on ea	ntended for applic fic is the principal nes for moving ich approach	Vehicles stree	per hour o t (total of l	n major- both	Vehicles	1009 809 709 per hour one directi	% Satisfied: % Satisfied: % Satisfied: on minor- ion only)	✓ Yes	□ No
Condition A is in intersecting traff signal. Number of Later traffic on ea	ntended for applic fic is the principal nes for moving ich approach	Vehicles stree ap	per hour o t (total of l pproaches	n major- both	Vehicles street (c	100% 80% 70% per hour one direct	% Satisfied: % Satisfied: % Satisfied: on minor- ion only) 70%°	✓ Yes	□ No
Condition A is in intersecting traffsignal. Number of Lateraffic on ea	ntended for applic fic is the principal nes for moving ich approach Minor	Vehicles stree ap	per hour o t (total of l pproaches 80% ^b 400	n major- both) 70% ^c	Vehicles street (control	100% 80% 70% per hour one direct	% Satisfied: % Satisfied: % Satisfied: on minorion only) 70%°	✓ Yes	□ No
Condition A is in intersecting traffsignal. Number of Latraffic on eather traffic o	ntended for application is the principal intended for application in the principal intended for approach Minor 1 2 or more 2 or more	Vehicles stree ap 100% 500 600	per hour of t (total of l pproaches 80% b 400 480	n major- both) 70% ^c 350 420	Vehicles street (control 150	100% 80% 70% per hour one directi 80% 120 120	% Satisfied: % Satisfied: % Satisfied: on minorion only) 70% 105 105	✓ Yes	□ No
Condition A is in intersecting traffsignal. Number of Lattraffic on eattraffic on eat	ntended for application is the principal intended for application in the principal intended for approach Minor 1 2 or more 2 or more	Vehicles stree ap 100% 500 600 500 A and B after	per hour of t (total of l proaches 80% 400 480 400 adequate tr	70% ^c 350 420 420 350	Vehicles street (do 150 200 200 emedial mea	100% 80% 70% per hour one directi 80% 120 120 160 160 assures	% Satisfied: % Satisfied: % Satisfied: on minor- ion only) 70% 105 105 140 140	✓ Yes ✓ Yes	No No

Record 6 mg				t Highe:			101 0110	01 10/0//
Street	7:00AM	8:00 AM	12:00 PM	2:00 PIM	3:00 PM	4:00 PM	5:00 PM	6:00 PM
Major	1,164	955	993	1,031	1,045	1,319	1,485	1,157
Minor	228	342	624	569	541	524	501	420

Existing Volumes

State of Florida Department of Transportation

TRAFFIC SIGNAL WARRANT SUMMARY

Condition B - Interruption of Continuous Traffic	Applicable:	✓ Yes	☐ No
Condition B is intended for application where Condition A is not satisfied and the	100% Satisfied:	✓ Yes	☐ No
traffic volume on a major street is so heavy that traffic on the minor intersecting	80% Satisfied:	✓ Yes	☐ No
street suffers excessive delay or conflict in entering or crossing the major street.	70% Satisfied:	✓ Yes	□ No

II .	nes for moving ch approach	stree	per hour o t (total of I oproaches	ooth	Vehicles per hour on mino street (one direction only)			
Major	Minor	100% ^a	80% ^b	70%°	100%ª	80% ^b	70%°	
1	1	750	600	525	75	60	53	
2 or more	1	900	720	630	75	60	53	
2 or more	2 or more	900	720	630	100	80	70	
1	2 or more	750	600	525	100	80	70	

^a Basic Minimum hourly volume

Record 8 highest hours and the corresponding major-street and minor-street volumes in the Instructions Sheet.

	Eight Highest Hours							
Street	7:00AM	8:00 AM	12:00 PM	2:00 PM	3:00 PM	4:00 PM	5:00 PM	6:00 PM
Major	1,164	955	993	1,031	1,045	1,319	1,485	1,157
Minor	228	342	624	569	541	524	501	420

Existing Volumes

^b Used for combination of Conditions A and B after adequate trial of other remedial measures

^o May be used when the major-street speed exceeds 40 mph or in an isolated community with a population of less than 10,000

State of Florida Department of Transportation

City:	Mims	Engineer:		ACP	
County:	70 - Brevard	Date:	Februa	ry 11, 2019	
District:	Five				
Major Street:	SR 46	Lanes;1	Major Ap	proach Speed:	5
		Lanes: 1		pproach Speed:	4
	ference to Chapter 4: <a href="http://mutcd.fhwa</th><th></th><th></th><th>oproach Speed:_</th><th>4</th></tr><tr><th>UTCD Electronic Re</th><th>ference to Chapter 4: <a href=" http:="" mutcd.fhwa<="" th=""><th>a.dot.gov/pdfs/2009r1r2/par</th><th></th><th>oproach Speed:</th><th>4</th>	a.dot.gov/pdfs/2009r1r2/par		oproach Speed:	4
UTCD Electronic Re	ference to Chapter 4: <a a="" href="http://mutcd.fhwa</th><th>a.dot.gov/pdfs/2009r1r2/par
mph (70 km/h)?</th><th>t4.pdf</th><th></th><th>4</th></tr><tr><td>JTCD Electronic Re</td><td>ference to Chapter 4: <a href=" http:="" mutcd.fhwa<=""> peed or 85th-percentile of major street > 40<td>a.dot.gov/pdfs/2009r1r2/par mph (70 km/h)?</td><td>t4.pdf</td><td>✓ Yes □ No</td><td>4</td>	a.dot.gov/pdfs/2009r1r2/par mph (70 km/h)?	t4.pdf	✓ Yes □ No	4

If all four points lie above the appropriate line, then the warrant is satisfied.


Applicable: ✓ Yes No ✓ Yes No

Satisfied:

Plot four volume combinations on the applicable figure below.

100% Volume Level


Four	Volu	imes
Highest Hours	Major Street	Minor Street
7:00AM	1164	228
4:00 PM	1319	524
5:00 PM	1485	501
6:00 PM	1157	420



*Note: 115 vph applies as the lower threshold volume for a minor street approach with two or more lanes and 80 vph applies as the lower threshold volume threshold for a minor street approach with one lane.

70% Volume Level

Four	Volu	ımes
Highest Hours	Major Street	Minor Street
7:00AM	1164	228
4:00 PM	1319	524
5:00 PM	1485	501
6:00 PM	1157	420

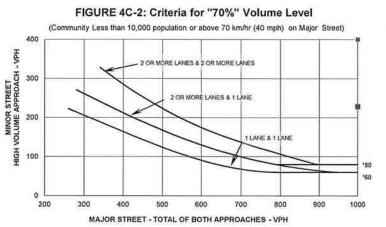

* Note: 80 vph applies as the lower threshold volume for a minor street approach with two or more lanes and 60 vph applies as the lower threshold volume threshold for a minor street approach with one lane.

Love's Travel Plaza Unincorporated Brevard County, Florida

Traffic Impact Study

Prepared for: Love's Travel Stops & Country Stores

By: LTG, Inc.

Revised February 2019



PROFESSIONAL ENGINEERING CERTIFICATION

I hereby certify that I am a Professional Engineer properly registered in the State of Florida practicing with LTG, Inc., a corporation authorized to operate as an engineering business, EB 0009227, by the State of Florida Department of Professional Regulation, Board of Professional Engineers, and that I have prepared or approved the evaluations, findings, opinions, conclusions, or technical advice attached hereto for:

PROJECT: Love's Travel Plaza – Traffic Impact Study Revised

LOCATION: Unincorporated Brevard County, Florida

CLIENT: Love's Travel Stops & County Stores

JOB #: 4607.03

I hereby acknowledge that the procedures and references used to develop the results contained in these computations are standard to the professional practice of Transportation Engineering as applied through professional judgment and experience.

Prepared by: LTG, Inc. 1450 W. Granada Blvd, Suite 2 Ormond Beach, FL 32174 Certificate of Authorization 9227 386/257-2571

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY:



ON THE DATE ADJACENT TO THE SEAL

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

1450 W. GRANADA BLVD, SUITE 2 ORMOND BEACH, FL 32174 CERTIFICATE OF AUTHORIZATION 9227 GEORGE A. GALAN, P.E. NO. 60080

TABLE OF CONTENTS

LIST OF FIGURESiii
LIST OF TABLESiii
APPENDICIESiv
INTRODUCTION1
Study Area1
Study Procedures1
Planned Roadway Improvements1
EXISTING ROADWAY ANALYSIS3
Unsignalized Intersection Analysis3
Signalized Intersection Analysis
Roadway Segment Analysis6
FUTURE TRAFFIC CONDITIONS7
Background Traffic7
2020 BUILD-OUT - FUTURE ROADWAY ANALYSIS8
Trip Generation8
Trip Distribution9
Trip Assignment9
2020 Build-Out - Unsignalized Intersection Analysis13
2020 Build-Out - Intersection Improvement Needed for Build-out Conditions
Analysis of Recommendations
2020 Build-Out - Signalized Intersection Analysis13
2020 Build-Out - Roadway Segment Analysis14
Site Access Analysis14
CONCLUSIONS AND RECOMMENDATIONS19

LIST OF FIGURES

Figure 1: Site I	_ocation Map2
Figure 4: Proje	ct Trip Distribution10
Figure 5: Build-	Out AM Peak-Hour Volumes10
Figure 6: Build-	Out PM Peak-Hour Volumes11
Figure 7: Ultima	ate Build-out Peak-Hour Volumes12
LIST OF TAI	BLES
Table 1: Existin	g AM and PM Peak-Hour LOS - Unsignalized Intersections3
Table 2: Existin	g AM and PM Peak-Hour LOS - Signalized Intersection3
Table 3: Existin	g PM Peak-Hour LOS - Roadway Segments6
Table 4: Histori	cal Growth Rates7
Table 5: Gross	Trip Generation8
Table 6: Net Tr	p Generation9
Table 7: Build-0	Out AM and PM Peak-Hour LOS - Unsignalized Intersections13
Table 8: Build-0	Out AM and PM Peak-Hour LOS - Unsignalized Intersection – Improved13
Table 9: Build-0	Out AM and PM Peak-Hour LOS - Signalized Intersections14
Table 10: Build-	-Out PM Peak-Hour LOS - Roadway Segments14
Table 11: Ultim	ate Build-out Gross Trip Generation15
Table 12: Ultima	ate Build-out Net Trip Generation16
Table 13: Ultima	ate Build-Out AM and PM Peak-Hour LOS - Signalized Intersection18
Appendix E- Appendix F- Appendix G- Appendix H- Appendix I- Appendix I- Appendix J- Appendix J- Appendix J- Signal Timings Signal Timings Signal Timings Signal Timings Signalized Intersections Synchro Summary Sheets - Existing Conditions Traffic Trends Analysis Sheets Unsignalized Intersections Synchro Summary Sheets - Build-Out Conditions - Improved Signalized Intersections Synchro Summary Sheets - Build-Out Conditions	
APPENDICE	S
Appendix A-	
Appendix D-	Unsignalized Intersections Synchro Summary Sheets - Existing Conditions
Appendix G-	Traffic Trends Analysis Sheets
Appendix I-	
Appendix J-	
Appendix K-	
Appendix L-	organized intersection synonic duminary offeets - Offinate build-out Conditions

1

INTRODUCTION

LTG, Inc. (LTG) has been retained by Love's Travel Stops & Country Stores to prepare a Traffic Impact Study (TIS) for the proposed Love's Travel Plaza development located in the northwest quadrant of the intersection of SR 46 and North Carpenter Road, just west of the I-95/SR46 interchange in unincorporated Brevard County, Florida. The project build-out year is 2020. Figure 1 shows the location and influence area of the project relative to the surrounding road network. A concept site plan showing the layout of the site is attached as Appendix A.

The development will be built in two phases. Ultimate Build-out, which will include the addition of a hotel, will only be used to size the project driveway and for turn lane requirements. The proposed development will consist of the following land-uses:

Fast Food Restaurant with Drive-Through:

Super Convenience Market/Gas Station: 10,300 SF, 24 Fueling Positions (16 vehicle FP and 8 truck FP)

2,700 SF

Tire Super Store:

Hotel (Ultimate Build-out):

3 Service Bays
120 Rooms

Study Area

The approved methodology (Appendix B) details the analysis used to determine the following study area intersections and roadway segment listed below:

Intersections:

- 1. SR 46 at Carpenter Road
- 2. SR 46 at I-95 SB Ramp
- 3. SR 46 at I-95 NB Ramp
- 4. SR 46 at Hammock Trail/Australian Way
- 5. SR 46 at Holder Road/Pine Avenue

Roadway Segments:


- SR 46 from Fawn Lake Boulevard to I-95
- SR 46 from I-95 to Palm Avenue

Study Procedures

Standard engineering and planning procedures were used to determine the impacts of the proposed project. Reference data were obtained from the Space Coast Transportation Planning Organization (Space Coast TPO), Brevard County, the Institute of Transportation Engineers (ITE), and the Florida Department of Transportation (FDOT).

Planned Roadway Improvements

FDOT's Five Year Work Program, Space Coast TPO and Brevard County were consulted to ascertain if there were any programmed or planned roadway improvements within the study area. Based on information available, SR 46 from Carpenter Road to Volusia County line is scheduled to be resurfaced.

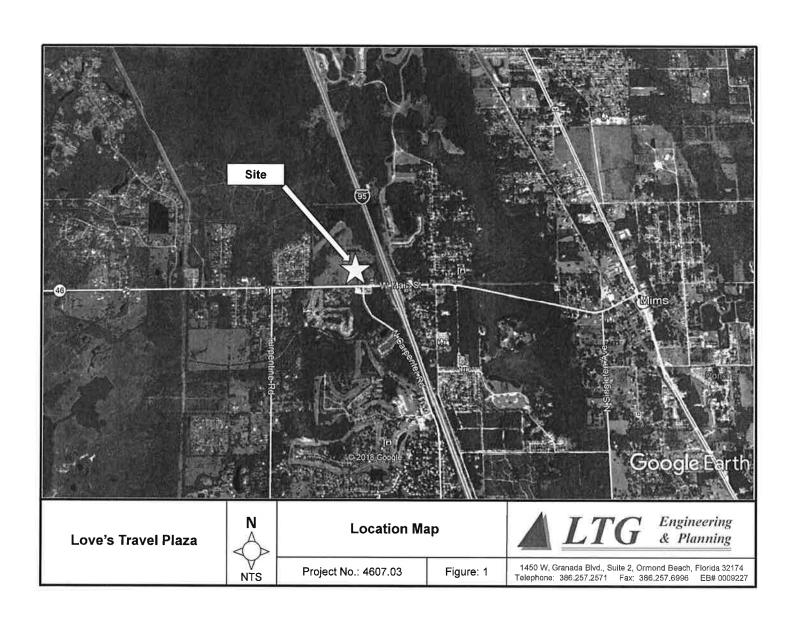

2

EXISTING ROADWAY ANALYSIS

Turning movement counts (TMCs) were conducted during the weekday AM and PM peak-hours on October 10th and November 13th of 2018 at the study area intersections (see Appendix C). The associated FDOT seasonal factors (SF) of 1.02 and 1.08 were applied to the counts to determine the adjusted factored volumes for analysis. The spreadsheet used to develop the existing and build-out traffic volumes is also located in Appendix C. The existing AM and PM peak-hour traffic volumes from the adjusted counts are presented in Figures 2 and 3.

Unsignalized Intersection Analysis

The existing conditions at the unsignalized intersections were analyzed using the *Synchro 10*. This software utilizes the procedures outlined in Chapter 20 of the *Highway Capacity Manual 6th Edition,* titled "Two-Way Stop-Controlled Intersections". Table 1 shows the existing AM and PM peak-hour level of service (LOS) at the unsignalized intersections. The Synchro summary sheets are located in Appendix D.

Table 1
Existing AM and PM Peak-Hour Level of Service - Unsignalized Intersections
Love's Travel Plaza

				Existin	g Conditions			
		AM P	eak-Hou	r	PM Peak-Hour			
Intersection	Adopted LOS	Critical Approach	Delay	LOS	Critical Approach	Delay	LOS	
1. SR 46 at Carpenter Rd.	D	NB	16.6	С	NB	22.9	С	
2. SR 46 at I-95 SB Ramp	D	SB	17.2	С	SB	23.1	С	
4. SR 46 at Hammock Trail	D	NB	22.7	С	NB	24.0	С	

As indicated in Table 1, all unsignalized intersections currently operate within the adopted LOS and achieve a v/c ratio less than 1.0 under existing conditions.


Signalized Intersection Analysis


The LOS at signalized intersections are based on the average stop delay per vehicle for the various movements within the intersections. The operating conditions at the signalized intersection was analyzed using *Synchro 10*. This software utilizes the procedures outlined in Chapter 19 of the *Highway Capacity Manual 6th Edition*, titled "Signalized Intersections". Signal timings were obtained from Brevard County and are provided in Appendix E. Table 2 shows the existing LOS at the project's signalized intersection during the AM and PM peak-hours. The Synchro summary sheets are included in Appendix F.

Table 2
Existing AM and PM Peak-Hour Level of Service - Signalized Intersection
Love's Travel Plaza

		А	AM Peak-Hour			PM Peak-Hour		
Intersection	Adopted LOS	Delay (sec.)	LOS	V/C greater than 1.0?	Delay (sec.)	LOS	V/C greater than 1.0?	
3. SR 46 at I-95 NB Ramp	D	14.6	В	No	20.1	С	No	
5. SR 46 at Pine Ave.	D	16.0	В	No	13.7	В	No	

As indicated in Table 2, the signalized intersections currently operate within the adopted LOS and achieve a v/c ratio less than 1.0 under existing conditions.

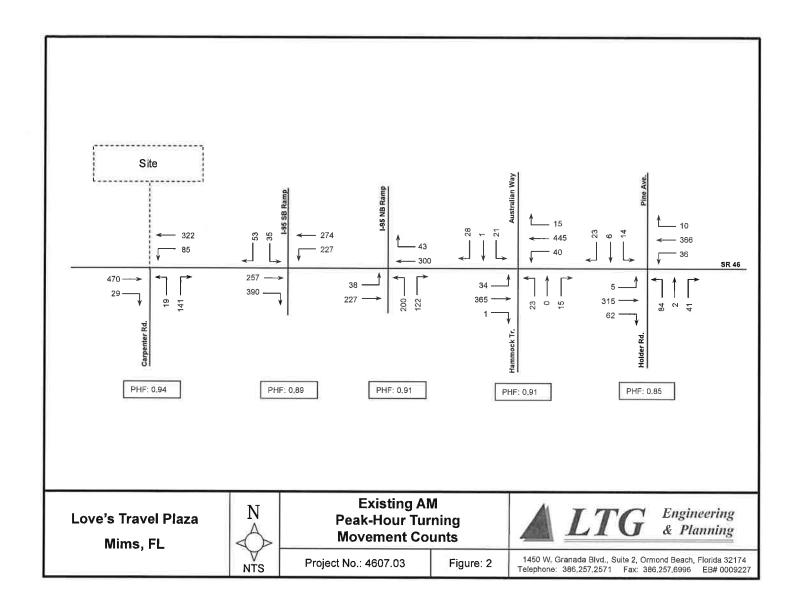

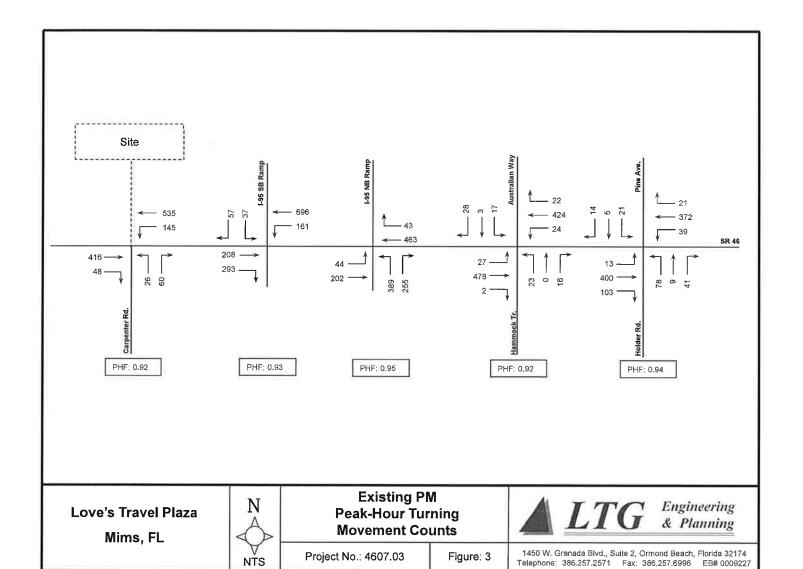

Roadway Segment Analysis

Roadway LOS describes the operating condition determined from the number of vehicles passing over a given section of roadway during a specified time period. It is a qualitative measure of several factors which include speed, travel time, traffic interruptions, freedom to maneuver, driver comfort, convenience, safety and vehicle operating costs. Six LOS categories have been established as standards by which to gauge roadway performance designated by the letters A through F. The LOS categories are defined as follows:

Level of Service A:	Free flow, individual users virtually unaffected by the presence of others
Level of Service B:	Stable flow with a high degree of freedom to select operating conditions

Level of Service C: Flow remains stable, but with significant interactions with others

Level of Service D: High-density stable flow in which the freedom to maneuver is severely restricted

Level of Service E: This condition represents the capacity level of the road

Level of Service F: Forced flow in which the traffic exceeds the amount that can be served

The Average Annual Daily Traffic (AADT) historical counts for the study roadway segments was obtained from the *Space Coast Transportation Planning Organization Traffic Counts* spreadsheet. The existing levels of service for the study area road segments during the PM peak-hour are shown in Table 3.

Table 3
Existing PM Peak-Hour Level of Service - Roadway Segments
Love's Travel Plaza

	Segn	Segment					Peak- Hour Two- Way Capacity at		Existing PM Peak- Hour Two-	Existing PM Volume Exceed
Roadway	From	То	No. of Lanes	Adopted LOS	Current MAV	K- Factor	Adopted LOS ¹	2017 AADT	Way Volume ²	Adopted LOS?
SR 46	Fawn Lake Blvd	I-95	2	D	14,160	0.090	1,274	10,360	617	No
SK 40	I-95	Palm Avenue	2	D	14,160	0.090	1,274	11,720	744	No

Capacity was calculated by applying a 0.09 k-factor to the current MAV.

As indicated in Table 3, the study area roadway segments currently operate within the adopted LOS.

²The existing PM peak-hour two-way volume were obtained from Space Coast Interactive Traffic Count data by taking the average of two-day counts (see Appendix C).

3

FUTURE TRAFFIC CONDITIONS

Background Traffic

The traffic growth rates from historic Average Annual Daily Traffic (AADT) counts from the past five years were determined for the study area roadway segments using FDOT's *Traffic Trends* software. Table 4 presents the average annual growth rates and the growth rate applied to the existing traffic volumes to project background traffic. A minimum average annual growth rate of two percent was applied for roadway segments that demonstrates less than two percent growth. The Traffic Trends analysis worksheets are contained in Appendix G.

Table 4 Historical Growth Rates Love's Travel Plaza

	Seg	gment	Average Annual Growth	Applied Growth
Roadway	From	То	Rate*	Rate
SR 46	Fawn Lake Blvd	I-95	3.56%	3.56%
SK 46	I-95	Palm Avenue	4.76%	4.76%

^{*}Growth rate of segment calculated using AADT data from available years (2013-2017)



2020 BUILD-OUT - FUTURE ROADWAY ANALYSIS

Trip Generation

The daily, AM and PM peak-hour trip generation for the development was determined using the Institute of Transportation Engineers (ITE) 10th Edition of the *Trip Generation Manual*. The gross trip generation is presented in Table 5.

Table 5
Gross Trip Generation
Love's Travel Plaza

Time Period	Land Use	Land Use Code	Trip Rate Equation	Size	Units	Percent Entering	Percent Exiting	Trips Entering	Trips Exiting	Total Trips
	Convenience Market/Gas Station	960	T=837.58(X)	10.3	KSF	50%	50%	4,314	4,314	8,627
Daily	Fast Food Restaurant with Drive Through	934	T=470.95(X)	2.7	KSF	50%	50%	636	636	1,272
	Tire Store	849	T=30.55(X)	3.0	Service Bays	50%	50%	46	46	92
			Totals:					4,996	4,995	9,991
	Convenience Market/Gas Station	960	T=83.14(X)	10.3	KSF	50%	50%	4 28	428	856
AM Peak- Hour	Fast Food Restaurant with Drive Through	934	T=40.19(X)	2.7	KSF	51%	49%	55	54	109
	Tire Store	849	T=2.01(X)	3.0	Service Bays	65%	35%	4	2	6
			Totals:					487	484	971
DM	Convenience Market/Gas Station	960	T=69.28(X)	10.3	KSF	50%	50%	357	357	714
PM Peak- Hour	Fast Food Restaurant with Drive Through	934	T=32.67(X)	2.7	KSF	52%	48%	46	42	88
	Tire Store	849	T=3.17(X)	3.0	Service Bays	47%	53%	4	6	10
			Totals:					407	405	812

Due to the nature of the proposed development, a certain portion of the trips are expected to remain internal to the site. The internal capture rate was calculated based on AM and PM NCHRP Report 684 Internal Capture Estimator. Additionally, a portion of the new trips known as pass-by will be attracted to the project from the existing traffic on the adjacent roadways. These pass-by trips were calculated using procedures outlined in the *Trip Generation Handbook*, 3rd *Edition*. The internal capture and pass-by trips associated with the development were deducted from the gross total project trips to determine the new net external trips. The results are presented in Table 6.

Table 6
Net Trip Generation
Love's Travel Plaza

					ove s in	470111	uzu						
Time	Land		Total Trips		Inte	ernal Tri	ps	Pas	s-by Tr	ips	New	External	Trips
Period	Use	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total
	Convenience Market/Gas Station	4,314	4,313	8,627	0	0	0	0	0	0	4,314	4,313	8,627
Daily	Fast Food Restaurant with Drive Through	636	636	1,272	0	0	0	0	0	0	636	636	1,272
	Tire Store	46	46	92	0	0	0	0	0	0	46	46	92
	Totals:	4,996	4,995	9,990	0	0	0	0	0	0	4,996	4.995	9,991
	Convenience Market/Gas Station	428	428	856	8	28	36	260	248	508	160	152	312
AM Peak- Hour	Fast Food Restaurant with Drive Through	55	54	109	28	8	36	13	23	36	14	23	37
	Tire Store	4	2	6	0	0	0	0	0	0	4	23	6
	Totals:	487	484	971	36	36	72	273	271	544	178	177	355
	Convenience Market/Gas Station	357	357	714	17	13	30	190	193	383	150	151	301
PM Peak- Hour	Fast Food Restaurant with Drive Through	46	42	88	13	17	30	17	13	30	16	12	28
	Tire Store	4	6	10	0	0	0	0	0	- 00	4	6	10
										412			339
	Totals:	407	405	812	30	30	60	207	206	413	170	169	


Pass-by rates: Gas Station: AM - 62%, PM - 56%; Fast Food Restaurant: AM - 49%, PM - 50%.


Trip Distribution


The process of determining the directional flow of traffic associated with a new development is called trip distribution. A manual trip distribution was to determine the primary project trip distribution. The project trip distribution is graphically illustrated in Figure 4.

Trip Assignment

Using the project trip distribution, the AM and PM peak-hour project trips were assigned to the study area roadway network. Figures 5 and 6 graphically depicts the 2020 build-out AM and PM traffic and peak-hour project trips assigned at the study area intersections.

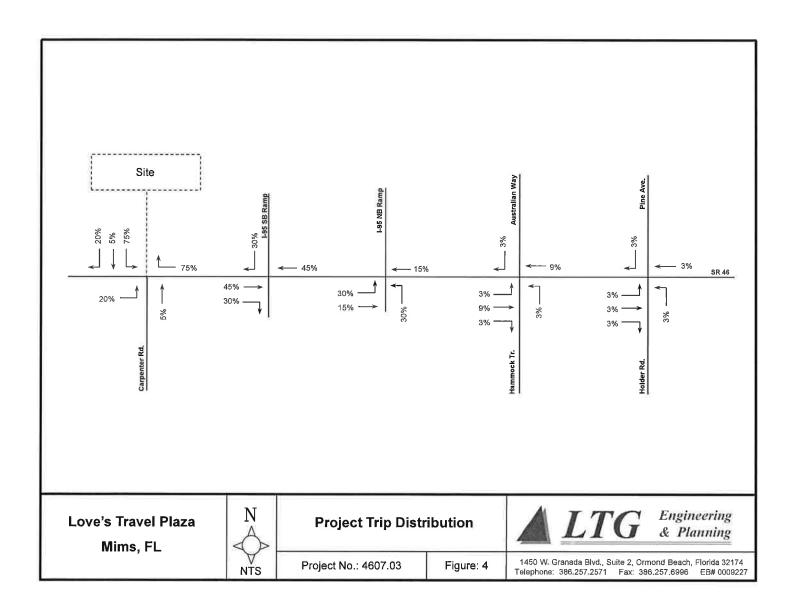

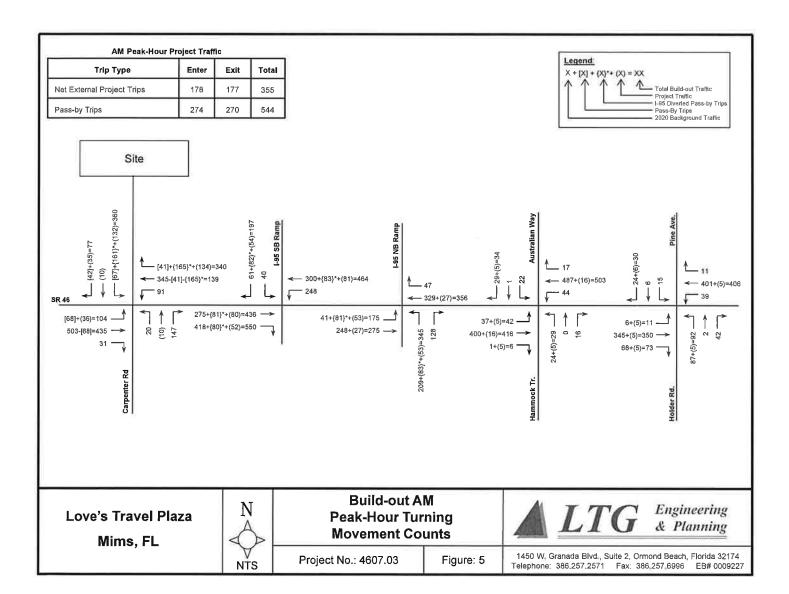

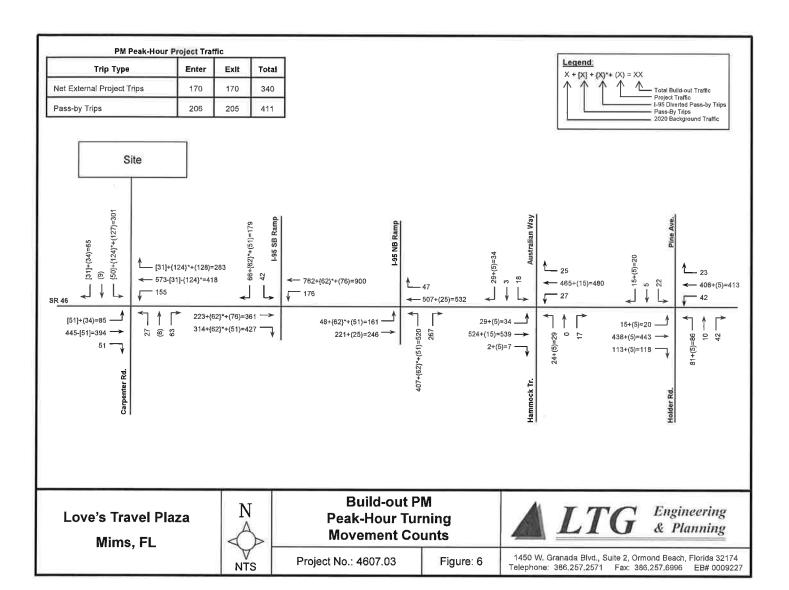

2020 Build-Out - Unsignalized Intersections Analysis

The unsignalized intersections were analyzed to determine the operational LOS under 2020 build-out conditions. Table 7 depicts the projected LOS in the AM and PM peak-hours for the unsignalized intersections under build-out conditions. The Synchro summary sheets are contained in Appendix H.

Table 7

Build-out AM and PM Peak-Hour LOS - Unsignalized Intersections

Love's Travel Plaza

		Build-Out Conditions									
		AM P	eak-Hour		PM Peak-Hour						
Intersection	Adopted LOS	Critical Approach	Delay (Sec.) LOS		Critical Delay Approach (Sec.)		LOS				
1. SR 46 at Carpenter Rd.	D	SB	1017.1	F	SB	1451.9	F				
2. SR 46 at I-95 SB Ramp	D	SB	23.9	С	SB	43.3	Е				
4. SR 46 at Hammock Trail	D	NB	31.6	D	NB	34.1	D				

As indicated in Table 7, all unsignalized intersections are expected to operate within the adopted LOS and achieve a v/c ratio less than 1.0 under build-out conditions with the exception of the SR 46 at Carpenter Road intersection, which is expected to operate outside of the adopted LOS.

Intersection Improvement Needed for Build-out Conditions

Under build-out conditions, the following improvement is recommended in order to achieve acceptable levels of service and a v/c ratio less than 1.0 for the following intersection:

SR 46 at Carpenter Road:

Install a traffic signal control

Analysis of Recommendations

The unsignalized intersection was then reanalyzed to determine the operational LOS under the build-out conditions with the recommended installation of a traffic signal control. The results are presented in Table 8. Synchro summary sheets are located in Appendix I.

Table 8
Build-out AM and PM Peak-Hour LOS - Unsignalized Intersection - Improved Love's Travel Plaza

		Build-Out Conditions with Improvements								
		AM	Peak-H	our	PM Peak-Hour					
Intersection	Adopted LOS	Delay (Sec.)	LOS	V/C greater than 1.0?	Delay (Sec.)	LOS	V/C greater than 1.0?			
1. SR 46 at Carpenter Rd.	D	9.7	Α	No	9.1	Α	No			

As indicated in Table 8, the intersection is expected to operate within the adopted LOS and achieve a v/c ratio less than 1.0 under build-out conditions with the recommended installation of a traffic signal control.

2020 Build-Out - Signalized Intersections Analysis

The signalized intersections were analyzed to determine the operational LOS under 2020 build-out conditions. Table 9 shows the projected LOS in the AM and PM peak-hour at the signalized intersections. The Synchro summary sheets are contained in Appendix J.

Table 9 Build-out AM and PM Peak-Hour LOS - Signalized Intersections Love's Travel Plaza

			AM Pea	k-Hour		PM Pea	k-Hour				
Intersection	Adopted LOS	Delay V/C greate (sec.) LOS than 1.0?			Delay (sec.)	LOS	V/C greater than 1.0?				
3. SR 46 at I-95 NB Ramp	D	19.2	В	No	27.0	С	No				
5. SR 46 at Pine Ave.	D	17.5	В	No	14.6	В	No				

As indicated in Table 9, the signalized intersections are expected to operate within the adopted LOS and achieve a v/c ratio less than 1.0 under build-out conditions.

2020 Build-Out - Roadway Segment Analysis

The study area roadway segments were analyzed under 2020 build-out conditions to determine the anticipated LOS at the time of build-out. The results are presented in Table 10.

Table 10
Build-out PM Peak-Hour Level of Service - Roadway Segments
Love's Travel Plaza

	Segm	Segment				Peak- Hour Two- Way Capacity at	Existing PM Peak- Hour Two-	2020	2020			2020 Build-	2020 Build- Out Traffic Exceed
Roadway	From	То	No. of Lanes	Adopted LOS	Current MAV	Adopted LOS	Way Volume	Growth Factor	Background Traffic	Project Distribution	Project Trips	Out Traffic	Adopted LOS?
	Fawn Lake Blvd	Site	2	D	14,160	1,274	617	1.11	683	20%	68	751	No
SR 46	Site	I-95	2	D	14,160	1,274	617	1.11	683	75%	255	938	No
	I-95	Palm Avenue	2	D	14,160	1,274	744	1.14	850	15%	51	901	No

As indicted in Table 10, the study area roadway segments are expected to operate within the adopted LOS.

Site Access Analysis

The intersection of SR 46 at Carpenter Road was analyzed under Ultimate build-out conditions, which includes a 120-room hotel. Access to the Love's Travel Plaza is proposed via a full access driveway on the northern leg of the SR 46 at Carpenter intersection. Ultimate Build-out trip generation for the proposed Love's Travel Plaza with the addition of the hotel is presented in Table 11. The daily, AM and PM peak-hour trip generation were determined using ITE 10th Edition of the *Trip Generation Manual*.

Table 11
Ultimate Build-out Gross Trip Generation
Love's Travel Plaza

Time Period	Land Use	Land Use Code	Trip Rate Equation	Size	Units	Percent Entering	Percent Exiting	Trips Entering	Trips Exiting	Total Trips
	Convenience Market/Gas Station	960	T=837.58(X)	10.3	KSF	50%	50%	4,314	4,314	8,627
Daily	Hotel	310	T=11.29(X)-426.97	120	Rooms	50%	50%	464	464	928
,	Fast Food Restaurant with Drive Through	934	T=470.95(X)	2.70	KSF	50%	50%	636	636	1,272
	Tire Store	849	T=30.55(X)	3.00	Service Bays	50%	50%	46	46	92
	/·		Totals:					5,460	5,460	10,920
	Convenience Market/Gas Station	960	T=83.14(X)	10.3	KSF	50%	50%	428	428	856
AM Peak-	Hotel	310	T=0.50(X)-5.34	120	Rooms	59%	41%	32	22	54
Hour	Fast Food Restaurant with Drive Through	934	T=40.19(X)	2.70	KSF	51%	49%	55	54	109
	Tire Store	849	T=2.01(X)	3.0	Service Bays	65%	35%	4	2	6
			Totals:					519	566	1,025
	Convenience Market/Gas Station	960	T=69.28(X)	10.3	KSF	50%	50%	357	357	714
PM Peak-	Hotel	310	T=0.75(X)-26.02	120	Rooms	51%	49%	33	31	64
Hour	Fast Food Restaurant with Drive Through	934	T=32.67(X)	2.70	KSF	52%	48%	46	42	88
	Tire Store	849	T=3.17(X)	3	Service Bays	47%	53%	4	6	10
	V		Totals:					440	436	876

As stated previously, a certain portion of the trips are expected to remain internal to the site and a portion of the new trips known as pass-by will be attracted to the project from the existing traffic on the adjacent roadways. The internal capture and pass-by trips associated with the development were deducted from the gross total project trips to determine the new net external trips. The calculation resulting from the subtraction of internal and pass-by trips are shown in Table 12.

Table 12
Ultimate Build-out Net Trip Generation
Love's Travel Plaza

Time	Land	1 10	Total Trip	os	Inte	rnal Tr	ips	Pas	s-by Tı	rips	New	Externa	l Trips
Period	Use	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total
	Convenience Market/Gas Station	4,314	4,314	8,628	0	0	0	0	0		4,314	4,314	8,628
	Hotel	464	464	928	0	0	0	0	0		464	464	928
Daily	Fast Food Restaurant with Drive Through Tire Store	636 46	636 46	1,272 92	0	0	0	0	0		636 46	636 46	1,272 92
	Totals:	5,460	5,460	10,920	0	0	0	0	0	0	5,460	5,460	10,920
	Convenience Market/Gas Station	428	428	856	11	28	39	259	248	507	158	152	310
AM	Hotel	32	22	54	1	5	6	0	0	0	31	17	48
Peak- Hour	Fast Food Restaurant with Drive Through	55	54	109	30	9	39	12	22	34	13	23	36
	Tire Store	4	2	6	. 0	0	0	0	0	0	4	2	6
	Totals:	519	506	1,025	42	42	84	271	270	541	206	194	400
	Convenience Market/Gas Station	357	357	714	22	19	41	188	189	377	147	149	296
PM	Hotel	33	31	64	9	7	16	0	0	0	24	24	48
Peak- Hour	Fast Food Restaurant with Drive					20		40	44	07			
	Through Tire Store	46	42 6	88 10	15 0	20	35 0	16 0	11	27	16	11	27 10
	Totals:	440	436	876	46	46	92	203	200	403	191	190	381

Ultimate Build-out driveway volumes are graphically shown in Figure 7. The SR 46 at Carpenter Road intersection was analyzed to determine the need for turn lanes to accommodate project traffic entering the site with a 45-mph posted speed limit along SR 46. The analysis was conducted using the standard National Cooperative Highway Research Program Report 457 (NCHRP 457) to determine if turn lanes are warranted. NCHRP worksheets are included in Appendix K. The results of the turn lane evaluation are provided below:


SR 46 at Carpenter Road:

- A 285-foot (185'+100' (minimum two trucks queue)) eastbound left-turn lane will be required.
- A 185-foot westbound right-turn lane will be required.

Please note that due to the proximity and limited spacing between the proposed Love's Travel Plaza driveway and the neighboring gas station to the east, the westbound right-turn lane will be limited to approximately 140 feet.





Trip Type	Enter	Exit	Total
Net External Project Trips	207	194	401
Pass-by Trips	271	270	541



PM Peak-Hour Project Traffic

Trip Type	Enter	Exit	Total
Net External Project Trips	190	189	379
Pass-by Trips	203	200	403





Love's Travel Plaza Mims, FL



Ultimate Build-out Peak-Hour Turning Movement Counts

Project No.: 4607.03

Figure: 7

A LTG Engineering & Planning

1450 W. Granada Blvd., Suite 2, Ormond Beach, Florida 32174 Telephone: 386,257.2571 Fax: 386,257.6996 EB# 0009227

Ultimate Build-Out - Signalized Intersection Analysis

The intersection of SR 46 at Carpenter Road was analyzed to determine the operational LOS under ultimate build-out conditions with the recommended installation of a traffic signal control. Table 13 depicts the projected LOS in the AM and PM peak-hours for the signalized intersection under ultimate build-out conditions. The Synchro summary sheets are contained in Appendix L.

Table 13
Ultimate Build-Out AM and PM Peak-Hour LOS - Signalized Intersection
Love's Travel Plaza

		Ultimate Build-Out Conditions								
	- 1	AM Peak-Hour	our	PM Peak-Hour						
Intersection	Adopted LOS	Delay (Sec.)	LOS	V/C greater than 1.0?	Delay (Sec.)	LOS	V/C greater than 1.0?			
1. SR 46 at Carpenter Rd.	D	10.1	В	No	9.4	Α	No			

As indicated in Table 13, the intersection is expected to operate within the adopted LOS and achieve a v/c ratio less than 1.0 under ultimate build-out conditions with the recommended installation of a traffic signal control.

5

CONCLUSION AND RECOMMENDATIONS

This study was conducted to evaluate the impact the proposed Love's Travel Plaza development would have on the surrounding roadway network. The proposed development is located in the northwest quadrant of the intersection of SR 46 and North Carpenter Road just west of the I-95/SR46 interchange in unincorporated Brevard County, FL. The project build-out year is 2020.

The development will be built in two phases. Ultimate Build-out will only be used to size the project driveway and for turn lane requirements. The proposed development will consist of the following land-uses:

Fast Food Restaurant with Drive-Through:

2.700 SF

Super Convenience Market/Gas Station:

10,300 SF, 24 Fueling Positions (16 vehicle FP and 8 truck FP)

Tire Super Store:

3 Service Bays

Hotel (Ultimate Build-out):

120 Rooms

The results of the study are summarized below:

Existing Conditions

- The study area unsignalized intersections currently operate within the adopted LOS.
- The study area signalized intersections currently operate within the adopted LOS.
- All study area roadway segments currently operate within the adopted LOS.

Build-out Conditions

- The study area unsignalized intersections are expected to operate within the adopted LOS under buildout conditions with the exception of the SR 46 at Carpenter Road intersection, which is anticipated to operate outside the adopted LOS during the AM and PM peak-hours.
- The installation of a traffic signal control at the SR 46 at Carpenter Road intersection is recommended in order to achieve acceptable LOS and a v/c ratio less than 1.0.
- The study area signalized intersections are expected to operate within the adopted LOS.
- All road segments within the study area are expected to operate within the adopted LOS.

Site Access Analysis

Access to the Love's Travel Plaza is proposed via a full access driveway on the northern leg of the SR 46 at Carpenter intersection. The results of the turn lane evaluation are provided below:


SR 46 at Carpenter Road:

- A 285-foot (185'+100' (minimum two trucks queue)) eastbound left-turn lane will be required.
- A 185-foot westbound right-turn lane will be required.

Please note that due to the proximity and limited spacing between the proposed Love's Travel Plaza driveway and the neighboring gas station to the east, the westbound right-turn lane will be limited to approximately 140 feet.

Based on the results of this study and the recommendations provided above, the proposed Love's Travel Plaza development is recommended for approval.

APPENDIX A CONCEPT PLAN

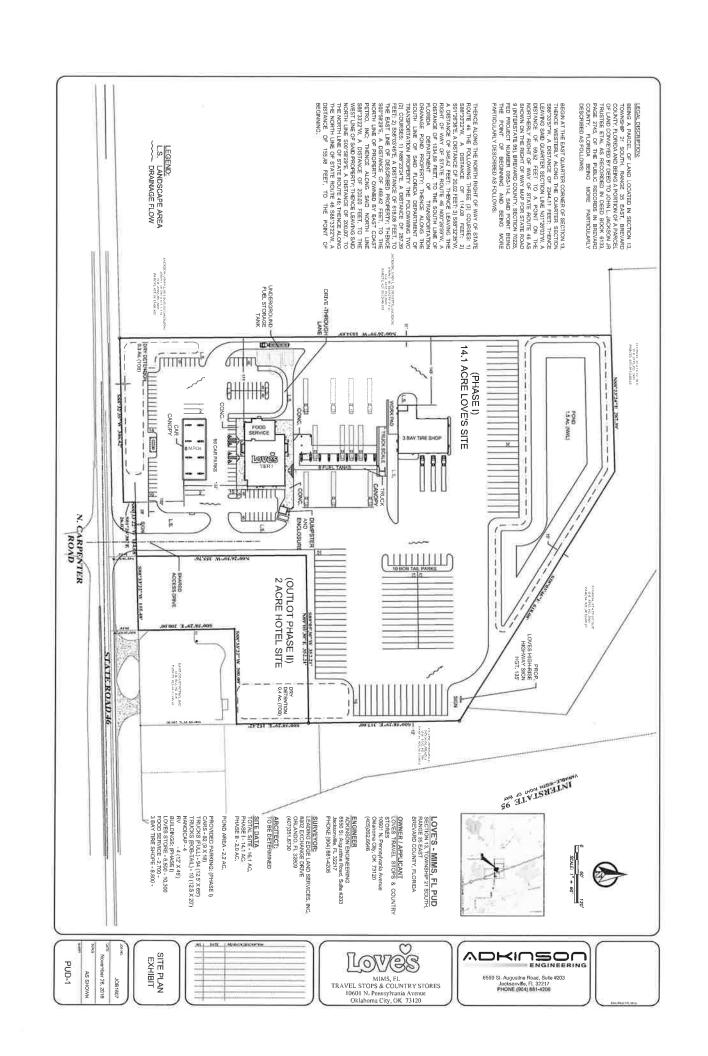

APPENDIX B METHODOLOGY



Via E-Mail:

(Suraj.Pamulapati@dot.state.fl.us)

Ref:

4607.01

November 5, 2018

Suraj Pamulapati, PE, PTOE District Five Access Management Engineer FDOT – Traffic Operations 719 S. Woodland Blvd., M.S. # 562 Deland, Florida 32720

RE:

Love's Travel Plaza - Traffic Impact Study Methodology

Mims, Florida

Dear Mr. Pamulapati:

LTG, Inc. (LTG) has been retained by Love's Travel Stops & Country Stores to prepare a Traffic Impact Study (TIS) for the proposed Love's Travel Plaza located in the northwest quadrant of the intersection of SR 46 and North Carpenter Road just west of the I-95/SR46 interchange in unincorporated Brevard County, FL. The TIS will be prepared in accordance with requirements for Brevard County as well as Florida Department of Transportation (FDOT) driveway permit applications. Figure 1 shows the location of the project relative to the surrounding road network and a preliminary site plan is attached as Exhibit A. Build-out of the project is expected by the end of 2020.

The proposed development will consist of the following land-uses:

Hotel:

120 Rooms

Fast Food Restaurant with Drive-Through:

2,670 SF

Super Convenience Market/Gas Station:

8,200 SF, 24 Fueling Positions (16 vehicle FP and 8 truck FP)

Tire Super Store:

3 Service Bays

Analysis Period


Roadway segments will be analyzed based on daily traffic and intersections will be analyzed during the a.m. and p.m. peak-hour. The analysis will be conducted under 2018 existing conditions and 2020 build-out conditions.

Traffic Concurrency Spreadsheet

The analysis will be based on the latest concurrency information as obtained from FDOT and the Brevard County Planning and Development Department.

Trip Generation

The daily, a.m. and p.m. peak-hour trip generation rates for the proposed project were determined using the the Institute of Transportation Engineers (ITE) 10th Edition of the *Trip Generation Manual*. The gross trip generation is presented in Table 1.

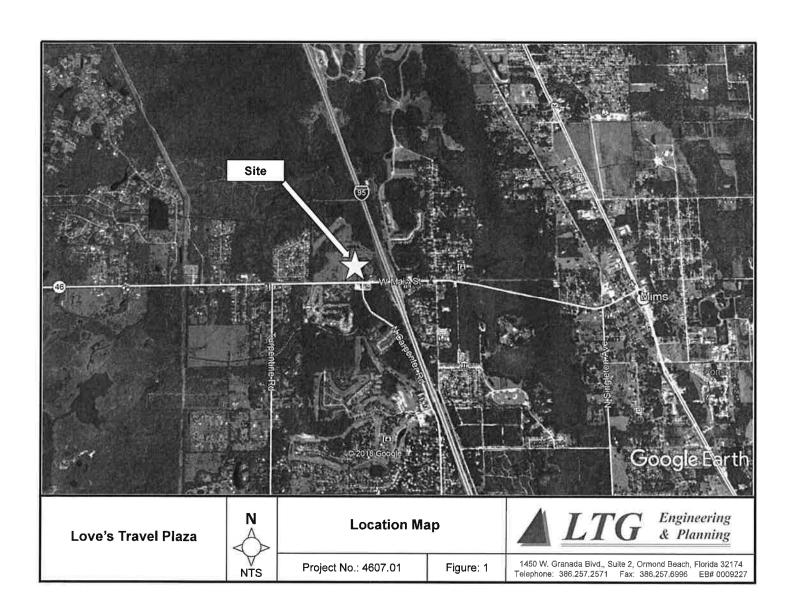

Mr. Suraj Pamulapati November 5, 2018 Page 3

Table 1 Gross Trip Generation Love's Travel Plaza

Period		Land Use				Percent	Percent	Trips	Trips	Total
	Use	Code	Trip Rate Equation	Size	Units	Entering	Exiting	Entering	Exiting	Trips
	Convience Market/Gas									
	Station	960	T=837,58(X)	8.2	KSF	50%	50%	3,434	3,434	6,86
Daily	Hotel	310	T=11.29(X)-426.97	120	Rooms	50%	50%	464	464	92
Daily	Fast Food Restaurant with									
	Drive Through	934	T=470.95(X)	2.67	KSF	50%	50%	629	629	1,25
					Service					
	Tire Store	849	T=30.55(X)	3.00	Bays	50%	50%	46	46	92
			Totals:					4,573	4,573	9,148
	Convience Market/Gas									
	Station	960	T=83,14(X)	8,2	KSF	50%	50%	341	341	682
AM Peak-	Hotel	310	T=0.50(X)-5.34	120	Rooms	59%	41%	32	23	55
Hour	Fast Food Restaurant with									
	Drive Through	934	T=40.19(X)	2.67	KSF	51%	49%	55	52	107
					Service					
	Tire Store	849	T=2.01(X)	3.0	Bays	65%	35%	4	2	- 6
			Totals:					432	418	850
	Convience Market/Gas Station	960	T-60 00/00		KOE	5004	E00/			
	Station	960	T=69,28(X)	8.2	KSF	50%	50%	284	284	568
PM Peak-	Hotel	310	T=0.75(X)-26.02	120	Rooms	51%	49%	33	31	64
Hour	Fast Food Restaurant with									
	Drive Through	934	T=32.67(X)	2.67	KSF	52%	48%	45	42	87
	Tire Store	849	T=3.17(X)	3	Service Bays	47%	53%	4	6	10
			Totals:		23/0	1.70	. 5570	366	363	729

Due to the nature of the proposed development, a certain portion of the trips generated is expected to remain internal to the site while an additional percentage is expected to be attracted from existing traffic on the adjacent roadway (pass-by). The internal capture rate was calculated based on a.m. and p.m. NCHRP Report 684 Internal Capture Estimator (Exhibit B). The pass-by capture trips were calculated using procedures outlined in the *ITE Trip Generation Handbook*. As part of this study, 40% of the total pass-by trips were assigned to SR 46 and 60% were assigned as diverted trips from I-95. Table 2 shows the resulting net new external trips to be assigned to the roadway network.



Mr. Suraj Pamulapati November 5, 2018 Page 4

Table 2 Net Trip Generation Love's Travel Plaza

							LUVE	3 8 11	avei	riaze	a								
Time	Land		Total Trips		Int	ernal Tr	ips	Pass-	by Trips	Total		by Trips 6 of Pass			ted from		New	Externa	l Trips
Period	Use	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total
	Market/Gas	3,434	3,434	6,868	153	315	468	0	0	0	0	0	0	0	0	0	3.281	3.119	6,40
	Hotel	464	464	928	19	103	122	0	0	0	0	0	0	0	0	0	445	361	80
	Fast Food																		
Daily	Restaurant																		
	with Drive																		
	Through	629	629	1,257	353	107	460	0	0	0	0	0	o	o	0	0	276	522	798
	Tire Store	46	46	92			0	0	0	0	0	0	0	0	0	0	46	46	92
	Totals:	4,573	4,573	9,145	525	525	1,050	0	0	0	0	0	0	0	0	0	4,048	4.048	8.096
Time	Land	1	otal Trips		Int	ernal Tr	ips	Pas	ss-by Tr	ips							New	Externa	l Trins
Period	Use	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total							Enter	Exit	Total
	Market/Gas	341	341	682	10	28	. 38	200	200	399	80	80	160	120	120	239	131	113	245
	Hotel	32	_ 23	- 55	1	- 5	6	0	0	0	0	0	0	0	0		31	18	49
AM Peak-	Fast Food												_				-	7.60	
Hour	Restaurant										0								
Hour	with Drive																		
	Through	55	52	107	30	8	38	17	17	34	7	7	14	10	10	20	8	27	35
	Tire Store	4	2	6	0	0	0	0	0	0	0	0	0	0	0	0	4	2	6
	Totals:	432	418	850	41	41	82	217	216	433	87	86	173	130	130	260	174	161	335
Time	Land	T	otal Trips		Inte	ernal Tri	ps	Pas	s-by Tr	ips							New	Externa	
Period	Use	Enter	Exit	Total	Enter	Exit	Total	Enter	Exit	Total							Enter	Exit	Total
	Market/Gas	284	284	568	22	19	41	148	148	295	59	59	118	89	89	177	114	117	232
	Hotel	33	31	64		7	16	0	0	0	0	0	0	0	0	0	24	24	48
PM Peak-	Fast Food													- "		- 0	- 27	24	
	Restaurant	0 7								1									
Hour	with Drive		- 1																
	Through	45	42	87	15	20	35	14	13	26	5	5	10	8	8	16	16	9	26
	Tire Store	4	6	10	0	0	0	0	0	0	0	0	0	0	.0	0	4	6	10
	Totals:	366	363	729	46	46	92	161	160	321	64	64	129	97	96	193	159	157	316

Pass-by rates: Convenience Market/Gas Station A.M. peak hour - 62%, P.M. peak hour 56%; Fast Food Restaurant A.M. peak hour 49%, P.M. peak hour 50%.

Project Trip Distribution

A manual trip distribution and engineering judgement will be used to distribute project trips. Figure 2 illustrates the proposed trip distribution.

Study Area

The study will include the following intersections and segment.


Intersections

- 1. SR 46 at Carpenter Road
- 2. SR 46 at I-95 SB Ramp
- 3. SR 46 at I-95 NB Ramp
- 4. SR 46 at Australian Way
- 5. SR 46 at Holder Road

Segments

- SR 46 from Fawn Lake Boulevard to I-95
- SR 46 from I-95 to Palm Avenue



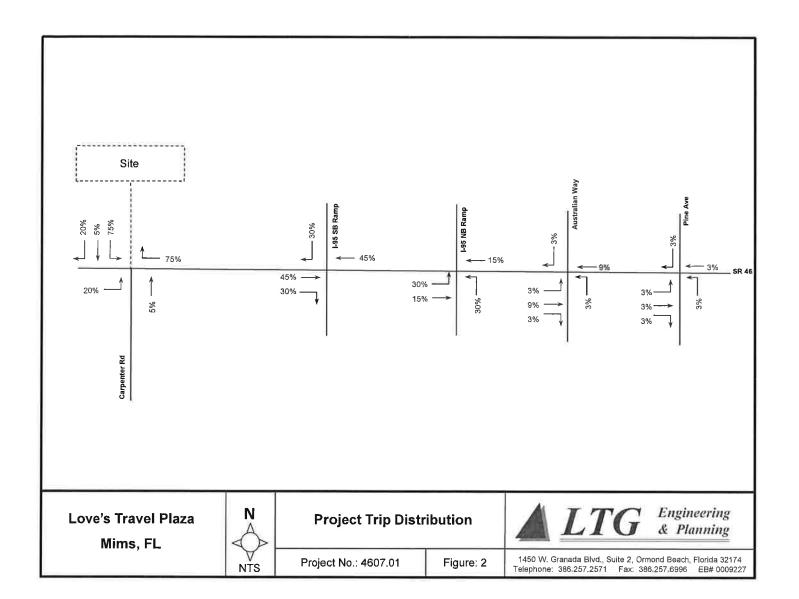

Mr. Suraj Pamulapati November 5, 2018 Page 6

Build-Out Traffic

The build-out traffic will be developed by the sum of the background traffic derived from growth rates or vested trips plus the estimated project traffic. Growth rates for each study area roadway segment will be determined by historic growth trends calculated based upon five years of historic count data. A minimum annual growth rate of two percent shall be used unless otherwise documented. In no case shall a negative growth rate be used.

Intersection Analysis - A.M. & P.M. Peak-Hour (Existing and Build-Out Conditions)

The operating conditions for both the existing and future conditions at the study intersections will be evaluated using the current version of Highway Capacity Software (HCS). This software is based on the 6th Edition <u>Highway Capacity Manual</u>.

Segment Analysis - Existing and Build-Out Conditions

Existing and Build-out segment traffic volumes will be compared to default capacities provided in the current Space Coast Transportation Planning Organization Traffic Counts Historical Counts document.

Improvements

If warranted, appropriate roadway and intersection improvements will be identified. Conditions for each analysis phase will be analyzed for improvements that are required for mitigation. Site access needs will be addressed. The need for turn lanes at the site driveway will be assessed using the methodology provided by NCHRP Report 457, HCS, and the latest version of the FDOT Design Standards.

Please review and advise if FDOT is in agreement with this proposed methodology or provide comments relating to preferred revisions. If you have any questions, please contact me at 386.257.2571.

Sincerely,

LTG, INC.

George Galan, PE Senior Project Manager

Attachments:

Exhibit A - Preliminary site plan

Exhibit B - NCHRP Report 684 Internal Capture Estimator

cc: Tim Schram, Sr. Project Manager, (tschram@adkinsoneng.com)



EXHIBIT APreliminary Site Plan

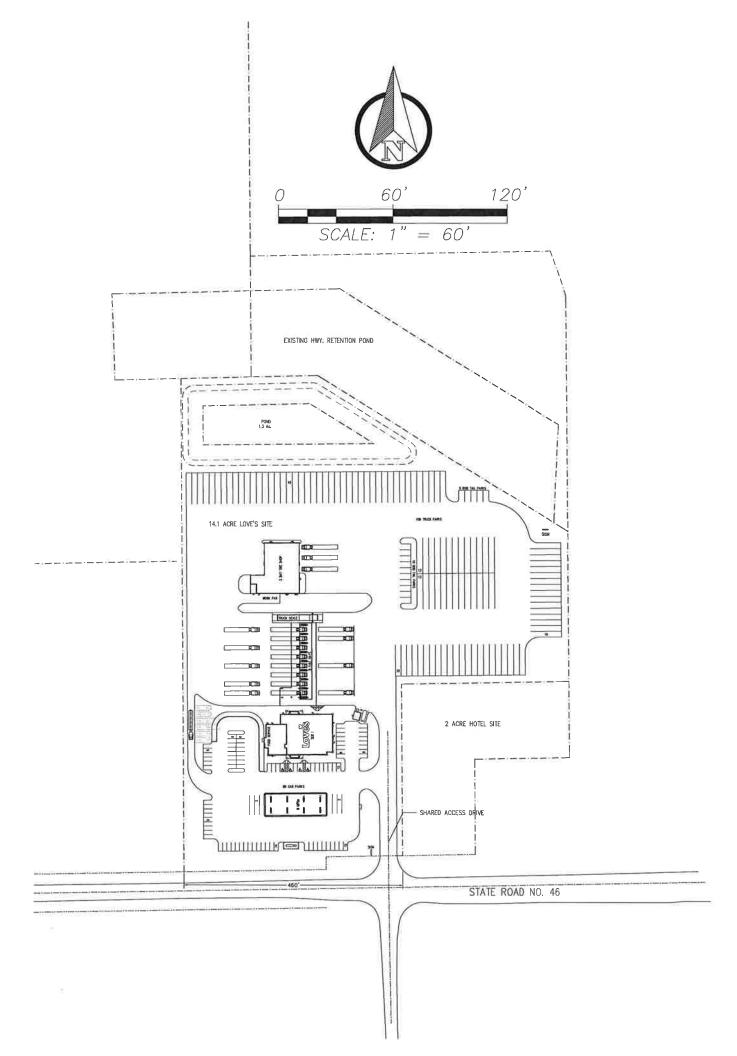


EXHIBIT BInternal Capture

	NCHRP 8-51 Internal Trip	Capture Estimation Tool	
Project Name:	Love's Travel Plaza	Organization:	LTG
Project Location:	Brevard County	Performed By:	ARO
Scenario Description:		Date:	9/25/2018
Analysis Year:	2020	Checked By:	
Analysis Period:	AM Street Peak Hour	Date:	

Land Use	Developme	nt Data (For Infor.	mation Only)	Estimated Vehicle-Trips				
Land Ose	ITE LUCs1	Quantity	Units	Total	Entering	Exiting		
Office				0				
Retail	960	8	KSF	682	341	341		
Restaurant	934	3	KSF	108	55	53		
Cinema/Entertainment				0				
Residential				0				
Hotel	310	120	Rooms	54	32	22		
All Other Land Uses ²				0				
Total	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			844	428	416		

		Table 2-A:	Mode Split and Vehicle	Occupancy Estimates		
Land Use		Entering Tr	ips		Exiting Trips	
Land Use	Veh. Occ.	% Transit	% Non-Motorized	Veh. Occ.	% Transit	% Non-Motorized
Office						
Retail						
Restaurant						
Cinema/Entertainment						
Residential						
Hotel						
All Other Land Uses ²						

	Table 3-A: Average Land Use Interchange Distances (Feet Walking Distance)											
Origin (From)		Destination (To)										
Oligili (Molli)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel						
Office	. 9				and the second second							
Retail												
Restaurant	14.7 m 1 m 1	100000000000000000000000000000000000000										
Cinema/Entertainment			TE OAT IN			0 - 1000 - 11						
Residential		, flats	29-2, 1, 11									
Hotel		The Other	8 - Walter 198		THE TAKE S							

		Table 4-A: I	nternal Person-Tri	p Origin-Destination Matrix*			
Origin (From)	Destination (To)						
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel	
Office	DATE OF THE	0	0	0	0	0	
Retail	0		28	0	0	0	
Restaurant	0	7		0	0	1	
Cinema/Entertainment	0	0	0		0	0	
Residential	0	0	0	0		0	
Hotel	0	3	2	0	0		

Table 5-A:	Table 5-A: Computations Summary					
	Total	Entering	Exiting			
All Person-Trips	844	428	416			
Internal Capture Percentage	10%	10%	10%			
External Vehicle-Trips ³	762	387	375			
External Transit-Trips ⁴	0	0	0			
External Non-Motorized Trips ⁴	0	0	0			

Table 6-A: Internal Trip Capture Percentages by Land Use					
Land Use	Entering Trips	Exiting Trips			
Office	N/A	N/A			
Retail	3%	8%			
Restaurant	55%	15%			
Cinema/Entertainment	N/A	N/A			
Residential	N/A	N/A			
Hotel	3%	23%			

Land Use Codes (LUCs) from Trip Generation Informational Report, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator

³Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A

⁴Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Estimation Tool Developed by the Texas Transportation Institute

Project Name:	Love's Travel Plaza
Analysis Period:	AM Street Peak Hour

		Table 7-A: Conv	ersion of Vehicle-Trip	p Ends to Person-Trip	Ends	
Land Use	Tab	le 7-A (D): Enter	ing Trips	· · · · · · · · · · · · · · · · · · ·	Table 7-A (O): Exiting Trip	S
Land Use	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.00	341	341	1.00	341	341
Restaurant	1.00	55	55	1.00	53	53
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1,00	0	0	1.00	0	0
Hotel	1.00	32	32	1.00	22	22

Ocinia (Tours) Destination (To)						
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	99		44	0	48	0
Restaurant	16	7		0	2	2
Cinema/Entertainment	0	0	0		0	0
Residential	0	0	0	0	Service of the Control	0
Hotel	17	3	2	0	0	

Table 8-A (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination) Destination (To)								
Origin (From)	Office	Retail	Residential	Hotel				
Office		109	13	0	0	0		
Retail	0	VIII. 21 22	28	0	0	0		
Restaurant	0	27		0	0	1		
Cinema/Entertainment	0	0	0		0	0		
Residential	0	58	11	0		0		
Hotel	0	14	3	0	0	Name of Street		

	Та	ble 9-A (D): Int	ernal and Externa	Trips Summary (Entering	Trips)		
Destination Land Use	Per		mates		External Trips by Mode*		
Destination Land Use	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²	
Office	0	0	0	0	0	0	
Retail	10	331	341	331	0	0	
Restaurant	30	25	55	25	0	0	
Cinema/Entertainment	0	0	0	0	0	0	
Residential	0	0	0	0	0	0	
Hotel	1	31	32	31	0	0	
All Other Land Uses ³	0	0	0	0	0	0	

	T	able 9-A (O): In	ternal and Extern	al Ti	rips Summary (Exiting	Trips)		
Origin Land Use		Person-Trip Esti	mates	TT	External Trips by Mode*			
Oligili Land Ose	Internal	External	Total	1 1	Vehicles ¹	Transit ²	Non-Motorized ²	
Office	0	0	0	1 F	0	0	0	
Retail	28	313	341	7 [313	0	0	
Restaurant	8	45	53	1 1	45	0	0	
Cinema/Entertainment	0	0	0	11	0	0	0	
Residential	0	0	0	1 [0	0	0	
Hotel	5	17	22	7	17	0	0	
All Other Land Uses ³	0	0	0	1 [0	0	0	

^TVehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A

²Person-Trips

³Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator *Indicates computation that has been rounded to the nearest whole number.

	NCHRP 8-51 Internal Trip Capture Estimation Tool									
Project Name:	Love's Trave Plaza	T	Organization:	LTG						
Project Location:	Brevard County		Performed By:	ARO						
Scenario Description:			Date:	9/25/2018						
Analysis Year:	2020		Checked By:							
Analysis Period:	PM Street Peak Hour	1	Date:							

Land Use	Developme	ent Data (For Infor	mation Only)		Estimated Vehicle-Trips	
Land Ose	ITE LUCs1	Quantity	Units	Total	Entering	Exiting
Office				0		
Retail	960	8	KSF	568	284	284
Restaurant	934	3	KSF	87	45	42
Cinema/Entertainment				0		
Residential				0		
Hotel	310	120	Rooms	64	33	31
All Other Land Uses ²				0		
Total		Salu III (200)		719	362	357

		Table 2-P:	Mode Split and Vehicle	Occupancy Estimates	8	
Land Use		Entering Tr	ips	Exiting Trips		
Land Use	Veh. Occ.	% Transit	% Non-Motorized	Veh. Occ.	% Transit	% Non-Motorized
Office						
Retail						
Restaurant						
Cinema/Entertainment						
Residential						
Hotel						
All Other Land Uses ²						

Table 3-P: Average Land Use Interchange Distances (Feet Walking Distance)									
Origin (From)	Destination (To)								
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel			
Office									
Retail		Section 1							
Restaurant	ner of the								
Cinema/Entertainment			age with the same						
Residential	N THE LAN								
Hotel			LOUDY SEC.						

		Table 4-P: I	nternal Person-Tri	p Origin-Destination Matrix*		
Origin (From)				Destination (To)		
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	0	- W-	13	0	0	6
Restaurant	0	17		0	0	3
Cinema/Entertainment	0	0	0		0	0
Residential	0	0	0	0		0
Hotel	0	5	2	0	0	

Table 5-P: Computations Summary									
	Total	Entering	Exiting						
All Person-Trips	719	362	357						
Internal Capture Percentage	13%	13%	13%						

External Vehicle-Trips ³	627	316	311						
External Transit-Trips ⁴	0	0	0						
External Non-Motorized Trips	0	0	0						

Table 6-P: Internal	Trip Capture Percenta	ges by Land Use
Land Use	Entering Trips	Exiting Trips
Office	N/A	N/A
Retail	8%	7%
Restaurant	33%	48%
Cinema/Entertainment	N/A	N/A
Residential	N/A	N/A
Hotel	27%	23%

Land Use Codes (LUCs) from Trip Generation Informational Report, published by the Institute of Transportation Engineers.

Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator

Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P

⁴Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Estimation Tool Developed by the Texas Transportation Institute

Project Name:	Love's Trave Plaza
Analysis Period:	PM Street Peak Hour

	Ť	able 7-P: Conver	sion of Vehicle-Tri	p Er	nds to Person-Trip End	is				
Land Use	Table	e 7-P (D): Entering	Trips		Table 7-P (O); Exiting Trips					
Land Ose	Veh. Occ.	Vehicle-Trips	Person-Trips*		Veh. Occ.	Vehicle-Trips	Person-Trips*			
Office	1,00	0	0		1.00	0	0			
Retail	1.00	284	284		1,00	284	284			
Restaurant	1.00	45	45		1.00	42	42			
Cinema/Entertainment	1.00	0	0		1.00	0	0			
Residential	1.00	0	0		1.00	0	0			
Hotel	1.00	33	33		1,00	31	31			

Origin (From)				Destination (To)		
Oligili (Fichi)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office	THE STATE OF THE	0	0	0	0	0
Retail	6		82	11	74	14
Restaurant	1	17		3	8	3
Cinema/Entertainment	0	0	0	0.8"	0	0
Residential	0	0	0	0	20 2 1	0
Hotel	0	5	21	0	1	Tell to the

Origin (From)				Destination (To)		
Oligiii (Floili)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		23	1	0	0	0
Retail	0	JULIAN S	13	0	0	6
Restaurant	0	142	100000000000000000000000000000000000000	0	0	23
Cinema/Entertainment	0	11	1	TO STATE OF THE ST	0	0
Residential	0	28	6	0		4
Hotel	0	6	2	0	0	

	Tat	le 9-P (D): Interna	I and External Trip	s Summary (Entering Trip	ns)						
Destination Land Use	Pe	erson-Trip Estimate	es		External Trips by Mode*						
Destillation Land Ose	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²					
Office	0	0	0	0	0	0					
Retail	22	262	284	262	0	0					
Restaurant	15	30	45	30	0	0					
Cinema/Entertainment	0	0	0	0	0	0					
Residential	0	0	0	0	0	0					
Hotel	9	24	33	24	0	0					
All Other Land Uses ³	0	0	0	0	0	0					

	Ta	ble 9-P (O): Intern	al and External Tr	lps Summary (Exiting Trip	s)						
Origin Land Use	Pe	erson-Trip Estimate	s		External Trips by Mode*						
Origin Land Ose	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²					
Office	0	0	0	0	0	0					
Retail	19	265	284	265	0	0					
Restaurant	20	22	42	22	0	0					
Cinema/Entertainment	0	0	0	0	0	0					
Residential	0	0	0	0	0	0					
Hotel	7	24	31	24	0	0					
All Other Land Uses ³	0	0	0	0	0	0					

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P ²Person-Trips

³Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator 'Indicates computation that has been rounded to the nearest whole number.

APPENDIX C TURNING MOVEMENT COUNTS

AM Peak-Hour Factored Volumes

					xisting Traffi	0		Bak	kground Tr	affic					Đu	Id-Out	
Intersection	Approach		Raw Count	Raw Truck Count	Seasonal Fector	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume		Diverted Pass-by Trips	% Model Distribution	Trip Direction	Project Trips	Total Build- Out Volume	Peak-Hou Factor
	11.	U-Turn				0	0%			0	Section 11 and only				۵	0.	
	Eastbound	Left		0		0	0%	3,56%		0	68		20%	in	36	104	1
		Through Right	435	19		470	4%	0,0070		503	-68		- 3077		-0	435	1
23						29	15%			31					0	31	1
Rd		U-Turn				0	0%			0					- 0	0	1
je l	Westbound	Westbound Left Through Right			11	85	9%	3,56%		91					0	91	1
y Wes			298	9		322	3%	0,00%		345	-41	-165			0	139	1
탏					1.08	- 0	0%			0	41	165	75%	in	133	339	0.94
0		U-Tum			65	0	0%			0					0	0	0,54
id	Northbound	Left		0		19	0%	2.00%		20					. 0	20	1
46		Through		0		0	0%			0			5%	in	9	9	1
S,		Right		- 4		141	3%			147						147	1
₹.		U-Turn			0 0	0	0%			0					0	0	1
	Southbound	Left		- 0		0	0%	2.00%		0	67	161	75%	out	133	361	1
		Through		0		0	0%			0			5%	out	9	9	1
		Right	- 0	0		- U	0%			0	42		20%	out	35	77	

				E	xisting Traff	ю.		Bac	kground Tr	attic				Build-	Out		
ntersection	Approach	Mymn'L	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	Diverted Pass-by Trips	% Model Distribution	Trip Direction	Project Trips	Total Build Out Volume	Peak-Hou Factor	
		U-Turn				0	0%			- 0			1.0	0	0		
	Eastbound	Left		0	1	0	0%	3.56%		0				0	0		
	Lasmodila	Through	238	8		257	3%	3,3676		275	81	45%	out	80	436		
		Right	361	17		390	5%			418	80	30%	eqt	53	551		
SB Ramp		U-Tum				0	0%	4,76%		0			- media	0	0		
	Westbound	Left				227	5%			245				. 0	248		
	44camonic	Through		4		274	2%		7,570	4,70%		300	83	45%	in	60	463
95 6		Right		0	1.08	0	0%			0				0	0	0.89	
47		LI-Turn			1,00	0	0%			0				0	Q	0,09	
	Northbound	Left		0		0	0%	2.00%		0				0	0		
4		Through		0		0	0%	2,00%		0				0	0		
S		Right		0		0	0%			0				. 0	0		
7		U-Turn				0	0%			0				0	0		
	Southbound	Left		4		35	13%	7_47%		40				0	40		
		Through		0		0	0%	1000		0				0	0		
		Right	49	7		53	14%			- 61	82	30%	in	53	196		

					xisting Traff	c		Bac	kground Tr	affic				Build-	Out		
Intersection	Approach	Mymn't	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	Diverted Pass-by Trips	% Model	Trip Direction	Project Trips	Total Build Out Volume	Peak-Hou Factor	
		U-Turn				0	0%			0				0	0		
	Eastbound	Left	35	2		38	6%	4.76%		41	61	30%	out	53	175		
	Lasibourid	Through		4		227	2%	4,70%		248		15%	out	27	275		
		Right	0	0		0	0%	4,76%		0				0	0		
d d		U-Turn				0	0%				0				0	0	
Ra	Westbound	Left		0		0	0%			0				0	0	ľ	
罗	TYCSWOOTIG	Through]	300	2%			329		15%	in	27	355		
50		Right	40	2	1.08	43	5%			47		-		0	47	2.04	
7		U-Turn			1,00	- 0	0%			0				0	0	0,91	
7	Northbound	Lat	185	19	- 11	200	10%	2.36%		209	82	30%	in	53	345		
46	ITTOTALDOGINA	Through		0		0	0%	2,30%		0				0	0		
S S		Right		7		122	6%	[128				0	128		
<u>8</u>		U-Turn			1	0	0%			0				0	0	ľ	
	Southbound	Left		0	- 0	0	0%	2.00%		0				0	0		
		Through		0	- 9	0	0%	2,00%		0				0	0		
		Right	. 0	0		0	0%	1 [0				0	0.		

					xisting Traff	¢.		Bac	kground Tr	raffic			Bulc	S-Out	
Intersection	Approach		Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	% Model	Trip Direction	Project Trips		Peak-Hou Factor
		U-Tuen				0	0%			0		-	0	0	
	Eastbound	Left	33	0	1 11	34	0%	4.76%		37	3%	out	5	42	1
	Laswoulid	Through	358	15	1	365	4%	4,76%		400	9%	out	16	416	
		Right		0	1 :		0%				3%	out	5	- 6	1
20		U-furn			1 0	0	0%			0		1	0	- O	1
- X	Westbound	Left		0	1 3	40	0%	4.76%		44			0	44	1
õ	*veamoulia	Through	436	19		445	4%	4,76%		487	9%	in	16	503	1
Ē		Right	15	2	1.02	15	13%			17			0	17	1
윤		U-Tum			1.02	0	0%			0			0	0	0,91
i	Northbound	Left		0	1 2	23	0%	2.00%		24	. 3%	ity	5	30	1
94	Northboand	Through				0	0%	2,00%		0			0	0	1
		Right	15		1 0	15	7%			16			0	16	1
Southboo		U-Turn				0	0%			0			0	0	1
	Southhound	Left	21			21	5%	2.00%		22			0.	22	1
	Sodingodija	Through					100%	2,00%		1			0	1	1
		Right	27	0		28	0%			29	3%	in	- 5	34	1

				E	xisting Traff.	č .		Bac	kground Tr	affic			Build	I-Out	
Intersection	Approach		Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	% Model Distribution	Trip Direction	Project Trips		Peak-Hou Factor
		U-Turn				0	0%			0			0	0	
	Eastbound	Lett	. 5	0	1	- 5	0%	4.700/		6	3%	out	5	11	1
	Lasaboujia	Through	309	12]	315	4%	4.76%	2	345	3%	out	5	350	1
		Right	61	2		- 62	3%			68	3%	out	5	73	1
a a		U-Turn			1 1	0	0%	4.76%		0			0	0	1
2	Westbound	Left		2	1	36	6%			39			0	39	1
0	**ESTOORING	Through	359	15	1 1	366	4%			401	3%	in	5	408	1
<u>c</u>		Right	10	1	1.02	10	10%		-	- 11			0	- 11	
₩		U-Turn			1,02	0	0%			0		r	0	0	0.85
46	Northbound	Left	82	1		84	156	2.00%		87	3%	in	5	92	1
S.	140) dibodila	Through	2	1		2	50%	2,00%	2	2	2		0	2	1
		Right	40	1		41	3%			42			0	42	1
ro.		U-Turn				0	016		7	0			0	0	1
1	Southbound	Left	14	3		14	21%	2.00%		15			0	15	1 !
	Southboulid	Through	6	. 0		- 6	0%	2.00%		- 6			0	.6.	1
		Right	23	. 1		23	456			24	3%	in	5	30	

PM Peak-Hour Factored Volumes

				YE	xisting Traffi	c		Bac	kground Tr				Build-	Out			
Intersection	Approach	Mymn't.	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	Pass-by	Diverted Pass by Trips	% Model Distribution	Project Trip Direction	Project Trips	Total Build- Out Volume	Peak-Hou Factor
		U-Tum				0	0%			0	4.11		0%	.0	0	0	
	Eastbound	Left			1	0	0%	3,56%		0	51		20%	in	34	85	1
	Lucabodiid	Through		4	1	416	1%	0.5070		445	-51		0%	0	.0	394	l
1		Right		. 0		48	0%			51			0%	0	0	51][
P. P.		U-Turn			1	0	0%			0	9		0%	0	0 -	0	l
ē	Westbound	Left	134		E 1	145	1%	3,56%		155			0%	0	0	155	II.
E E		Through		5	1	535	1%	0,00%		573	-31	-124	0%	0	0	418]
<u>-</u>		Right		. 0	1.08	-0	0%			0	31	124	75%	in	127	282	0.92
g		U-Turn				-0	0%			0			0%	0	0	0	0.52
, pa	Northbound	Left	24	0		26	0%	2.00%		27			0%	0	0	27	l
46		Through		0	! !	0	0%			0			5%	in	8	8][
S.		Right		1		60	2%			63			0%	0	0	63	1
		U-Turn				0	0%			0			0%	0	- 0	0	1
	Southbound	Left	0	0	1	0	0%	2.00%		0	50	124	75%	out	127	301	l
		Through	0	0		_0_	0%	-02		0			5%	out	8	8	l
		Right	. 0	0		0	0%			0	31		20%	out	34	65	II .

				E	xisting Traffi	c		Bac	kground Ta	affic			Build-Out			
Intersection	Approach	Mymn't.	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	Diverted Pass by Trips	% Model Distribution	Project Trip Direction	Project Trips	Total Build Out Volume	Peak-Hou
		U-Tum				0	0%			0		0%	0	0	0	
	Eastbound	Left	0	0		0	0%	3,56%		0		0%	0	0	0	i
	Lasibuditu	Through	193	3		208	2%	3,30%		223	62	45%	out	76	362	
		Right	271	3	į į	293	1%	i i		314	62	30%	out	51	426	ı
g.		U-Turn				0	0%			0		0%	0	0	0	
Ra	Westbound	Left				161	4%	4:76%		176		0%	0	0	176	
8	VV65Wddiid	Through		3	6 1	696	0%	4,7070		762	62	45%	in	76	900	ľ
10		Right	. 0	0	1.08	0	0%			.0		0%	0	0	0	0,93
<u> </u>		U-Turn			1,00	0	0%			0	1	0%	0	0	0	0.93
te e	Northbound	Left		. 0		0	0%	2.00%		0		0%	0	0	0	
46	HOIGIBOGING	Through		0)	0	0%	2 00 /6		0		0%	0	0	0	li .
S.		Right	0	0		0	0%			0		0%	0	0	0	
7		U-Turn				0	0%			0		0%	Ö	0	0	
	Southbound	Left		2	8	37	6%	7.47%		42		0%	0	0	42	ı
	Coumbodila	Through		0	(i	0	0%	1.77/70		0		0%	0	0	0	1
		Right	53	3		57	6%			66	62	30%	in	51	179	1

				E	xisting Traff	¢		Bac	kground Tr	attic			Build-Out			
intersection	Approach	Mymn't.	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	Diverted Pass by Trips	% Model Distribution	Project Trip Direction	Project Trips	Total Build- Out Volume	Peak-Hou Factor
		U-Turn				0	0%			0		0%	0	0	0	
	Eastbound	Left				44	0%	4.76%		48	62	30%	out	-51	161	
	Laswoulid	Through	187	3		202	2%	4.70%		221		15%	out	25	247	lì:
_		Right	0	0	1	0	0%	1		0		0%	0	0	0	1
읕		U-Tum				0	0%			0		0%	0	0	0	
æ	Westbound	Left	0	0		0	0%	4.76%	Ų.	0		0%	0	0	0	
9	vvesmound	Through				463	1%	4,7070		507		15%	in	25	533	İ
10		Right	40	1	1.08	43	3%			47		0%	0	0	47	0.05
<u> </u>		U-Turn			1,00	0	0%			0		0%	0	0	0	0,95
at	Northbound	Left	360	15		389	4%	2,36%		407	62	30%	in	51	520	ľ
46	INOI DI DOUNG	Through	. 0	0		0	0%	2,30%		0		0%	0	0	. 0	
8		Right		5		255	2%			267		0%	. 0	0	267	l
60		U-Turn				0	0%			0		0%	0	0	0	Į.
	Southbound	Left		0	i I	0	0%	2.00%		0		0%	0	0	0	l
	Coddibodila	Through				0	0%	2,0076		0		0%	0	0	0	
		Right	0	0		0	0%			0		0%	0	0	.0	I

				E	xisting Traffi	0		Bac	kground Tr	affic		Buil	d-Out		
Intersection	Approach	Mymn't.	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	% Model Distribution	Project Trip Direction	Project Trips	Total Build- Out Volume	Peak-Hour Factor
		U-Turn				0	0%			0	0%	0	0	0	
	Eastbound	Left	26	0	ļ.	27	0%	4.76%		29	3%	out	5	34	1
	Lastroulia	Through	469	9		478	2%	4./0%		524	9%	out	15	539	1
		Right	2	0		2	0%			2	3%	out	5	7	1
Ta .		U-Turn			1	0	0%			0	0%	0	0	0	1
'	Westbound	Left	24	0	8 1	24	0%	4.76%		27	0%	0	0	27	1
٥	AACSIDOUIIG	Through				424	2%	4,75%		465	9%	in	15	480	1
Ē		Right	22	1 1	1,02	22	5%	L		25	0%	0	0	25	1
표		U-Tum			1,02	0	0%			0	0%	0	0	0	0,92
ŧ	Northbound	Left	23	0		23	0%	2.00%		24	3%	Īn	5	29	11
46	Notuiboutiu	Through			B 11	0	0%	2,00%		0	0%	0	0	0	1
E.		Right	16	0		16	0%			17	0%	0	0	17	1
0)		U-Tum			ğ	0	0%			0	0%	0	0	0	1
4	Southbound	Left		0	Q III	17	0%	2,00%		18	0%	0	0	18	1
	Soduibouild	Through	3	0	i II	3	0%	2,00%		3	0%	0	0	3	1
		Right	27	3	9 U.	28	11%			29	3%	in	5	34	1

					xisting Traff	c		Bac	kground Tr	raffic		Buil	d-Out		
Intersection	Approach	Mymn't.	Raw Count	Raw Truck Count	Seasonal Factor	TMC Volume	% Heavy Vehicles	Approach Growth Rate	Vested Traffic	Total Background Volume	% Model Distribution	Project Trip	Project Trips		Peak-Hou Factor
		U-Turn				0	0%	I		0	0%	0	0	0	
	Eastbound	Left				13	0%	4 7004		15	3%	out	5	20	1
	Eastboultd	Through				400	2%	4.76%		438	3%	out	5	443	1
1		Right	101	1		103	1%			113	3%	out	5	118	1
41		U-Tum			0 1	0	0%			0	0%	0	0	0	1
N.	Westbound	Left		0	i II	39	0%	4.70%		42	0%	0	0	42	1
9	vvestodilid	Through	365	7	8 11	372	2%	4.76%		408	3%	in	5	413	1
듄		Right	21	0	1.02	21	0%	i[23	0%	0	0	23	0.94
ŧ		U-Tum			1,02	0	0%			0	0%	0	0	0	0.94
94	Northbound	Left	76	t		78	1%	2.00%		81	3%	in.	5	86	1
K K	Ivoranbound	Through		0	11	9	0%	2,00%		10	0%	0	0	1.0	1
S)		Right	40	0		41	0%			42	0%	0	0	42	1
42		U-Turn			1))(0	0%			0	0%	0	0	0	1
	Southbound	Left		0		21	0%	2,00%		22	0%	0	0	22	1
	Sodulbodild	Through		0		5	0%	2.00%		5	0%	0	0	5	1
		Right	14	0		14	0%			15	3%	in	5	20	1

DE TRAFFIC

http::de-traffic.com
Carpenter Rd at SR 46
Brevard County, FL

File Name : Carpenter at 46 Site Code : 00000001

Start Date : 10/10/2018 Page No : 1

Groups Printed- Automobiles - Commercial

								ed- Automot	oiles - Co								
1			/A				₹ 46				nter Rd				₹ 46		
			bound				bound			North	bound			Eastl	bound		
Start Time	Left	Thru		App. Total	Left	Thru		App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0	7.1	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0	TOTAL .	
07:00 AM	0	0	0	0	19	68	0	87	6	0	35	41	0	100	11	111	239
07:15 AM	0	0	0	0	15	80	0	95	1	0	30	31	0	105	5	110	236
07:30 AM	0	0	0	0	18	67	0	85	4	0	43	47	0	112	3	115	247
07:45 AM	0	0	0	0	22	71	0	93	9	0	33	42	0	117	10	127	262
Total	0	0	0	0	74	286	0	360	20	0	141	161	0	434	29	463	984
08:00 AM	0	0	0	0	24	80	0	104	4	0	25	29	0	101	9	110	243
08:15 AM	0	0	0	0	13	54	0	67	5	0	20	25	0	83	2	85	177
08:30 AM	0	0	0	0	22	52	0	74	5	0	25	30	0	69	4	73	177
08:45 AM	0	0	0	0	11	46	0	57	6	0	20	26	0	83	4	87	170
Total	0	0	0	0	70	232	0	302	20	0	90	110	0	336	19	355	767
04:00 PM 04:15 PM 04:30 PM 04:45 PM	0 0 0	0 0 0	0 0 0	0 0 0	43 22 41 41	123 107 112 123	0 0 0 0	166 129 153 164	11 12 13 7	0 0 0	22 20 10 16	33 32 23 23	0 0 0	72 83 66 62	10 6 10	82 89 76 69	281 250 252 256
Total	0	0	0	0	147	465	0	612	43	0	68	111	0	283	33	316	1039
05:00 PM	0	0	0	0	27	124	0	151	11	0	12	23	0	112	12	124	298
05:15 PM	0	0	0	o l	32	160	0	192	3	ō	11	14	Õ	96	8	104	310
05:30 PM	0	0	0	0	34	105	0	139	7	0	20	27	0	83	11	94	260
05:45 PM	0	0	0	0	41	106	0	147	3	0	13	16	0	94	13	107	270
Total	0	0	0	0	134	495	0	629	24	0	56	80	0	385	44	429	1138
Grand Total Apprch % Total %	0 0 0	0 0 0	0 0 0	0	425 22.3 10.8	1478 77.7 37.6	0 0 0	1903 48 ₋ 4	107 23.2 2.7	0 0 0	355 76.8 9	462 11.8	0 0 0	1438 92 36.6	125 8 3.2	1563 39.8	3928

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name : Carpenter at 46 Site Code : 00000001 Start Date : 10/10/2018

						Group	s Printe	ed- Automo	biles - Co	mmercia	al						
		N	/A			SF	46			Carpe	nter Rd			SF	₹ 46	_	1
		South	bound		10.00	West	bound			North	bound			East	bound		
	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right A	pp. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.01	****	1.0	1.0	1.0	4	
Automobiles	0	0	0	0	411	1446	0	1857	107	0	347	454	0	1393	118	1511	3822
% Automobiles	0	0	0	0	96.7	97.8	0	97.6	100	0	97.7	98.3	0	96.9	94.4	96.7	97.3
Commercial	0	0	0	0	14	32	0	46	0	0	8	8	0	45	7	52	106
% Commercial	0	0	0	0	3.3	2.2	0	2.4	0	0	2.3	1.7	0	3.1	5.6	3.3	2.7


DE TRAFFIC

http:/de-traffic.com
Carpenter Rd at SR 46
Brevard County, FL

File Name : Carpenter at 46 Site Code : 00000001 Start Date : 10/10/2018

		N,	/A			SR	46			Carpe	nter Rd			SR	46		
		South	bound			Westl	bound			North	bound			Eastb	ound		
Start Time	Left	Thru	Right A	pp. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right /	App. Total	Int. Total
Peak Hour Analys	is From (7:00 AN	1 to 08:45	AM - Pea	ak 1 of 1										~		
Peak Hour for Ent	tire Interse	ection Be	egins at 0	7:15 AM													
07:15 AM	0	0	0	0	15	80	0	95	1	0	30	31	0	105	5	110	236
07:30 AM	0	0	0	0	18	67	0	85	4	0	43	47	0	112	3	115	247
07:45 AM	0	0	0	0	22	71	0	93	9	0	33	42	0	117	10	127	262
08:00 AM	0	0	0	0	24	80	0	104	- 4	0	25	29	0	101	9	110	243
Total Volume	0	0	0	0	79	298	0	377	18	0	131	149	0	435	27	462	988
% App. Total	0	0	0		21	79	0		12.1	0	87.9		0	94.2	5.8		
PHF	.000	.000	.000	.000	.823	.931	.000	.906	.500	.000	.762	.793	.000	.929	.675	.909	.943
Automobiles	0	0	0	0	72	289	0	361	18	0	127	145	0	416	23	439	945
% Automobiles	0	0	0	0	91.1	97.0	0	95.8	100	0	96.9	97.3	0	95.6	85.2	95.0	95.6
Commercial	0	0	0	0	7	9	0	16	0	0	4	4	0	19	4	23	43
% Commercial	0	0	0	0	8.9	3.0	0	4.2	0	0	3.1	2.7	0	4.4	14.8	5.0	4.4

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

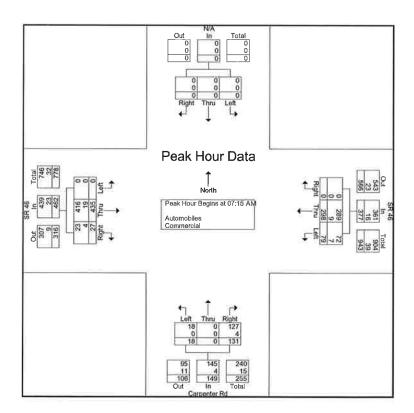

File Name : Carpenter at 46 Site Code : 00000001

Start Date : 10/10/2018


http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

File Name : Carpenter at 46 Site Code : 00000001

Start Date : 10/10/2018

			/A bound				46			Carper		ľ			46		
						west	oound			North	bouna			East	oound		
Start Time	Left	Thru	Right A	pp. Total	Left	Thru	Right A	pp. Total	Left	Thru	Right	App. Total	Left	Thru	Right App	Total	Int. Total
Peak Hour Analys	sis From (14:00 PN	A to 05:45	PM - Pe	ak 1 of 1					-							
Peak Hour for Ent	tire Inters	ection B	egins at 0	5:00 PM													
05:00 PM	0	0	0	0	27	124	0	151	11	0	12	23	0	112	12	124	298
05:15 PM	0	0	0	0	32	160	0	192	3	0	11	14	0	96	8	104	310
05:30 PM	0	0	0	0	34	105	0	139	7	0	20	27	0	83	11	94	260
05:45 PM	0	0	0	0	41	106	0	147	3	0	13	16	0	94	13	107	270
Total Volume	0	0	Ō	0	134	495	0	629	24	0	56	80	0	385	44	429	1138
% App. Total	0	0	0		21.3	78.7	.0		30	0	70		0	89.7	10.3		
PHF	.000	.000	.000	.000	.817	.773	.000	.819	.545	.000	.700	.741	.000	.859	.846	.865	.918
Automobiles	0	0	0	0	132	490	0	622	24	0	55	79	0	381	44	425	1126
% Automobiles	0	0	0	0	98.5	99.0	0	98.9	100	0	98.2	98.8	0	99.0	100	99.1	98.9
Commercial	0	0	0	0	2	5	0	7	0	0	1	1	0	4	0	4	12
% Commercial	0	0	0	0	1.5	1.0	0	1.1	0	0	1.8	1.3	0	1.0	0	0.9	1:1

http:de-traffic.com Carpenter Rd at SR 46 Brevard County, FL

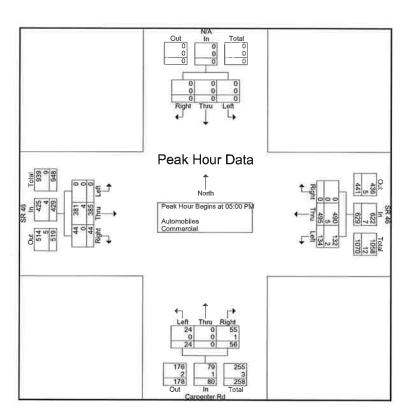

File Name : Carpenter at 46 Site Code : 00000001

Site Code : 00000001 Start Date : 10/10/2018

DE TRAFFIC

http://de-traffic.com
I-95 SB Ramp at SR 46
Brevard County, FL

File Name : I_95 SB at 46 Site Code : 00000002 Start Date : 10/10/2018

-3-1							Group	s Printe	ed- Automol	oiles - Co	ommercia	al						
				3 Ramp			SR	46			N	l/A			SF	R 46		
			South	bound			Westl	oound			North	bound			East	bound		
	Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
	Factor	1.0	1.0	1.0		1,0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
12.	07:00 AM	4	0	9	13	49	52	0	101	0	0	0	0	0	35	88	123	237
	07:15 AM	5	0	18	23	54	63	0	117	0	0	0	0	0	58	88	146	286
	07:30 AM	12	0	6	18	47	42	0	89	0	0	0	0	0	46	61	107	214
	07:45 AM	7	0	12	19	58	54	0	112	0	0	0	0	0	80	112	192	323
	Total	28	0	45	73	208	211	0	419	0	0	0	0	0	219	349	568	1060
	MA 00:80	8	0	13	21	51	95	0	146	0	0	0	0	0	54	100	154	321
	08:15 AM	5	0	6	11	31	80	0	111	0	0	0	0	0	31	41	72	194
	08:30 AM	7	0	9	16	45	71	0	116	0	0	0	0	0	37	71	108	240
	08:45 AM	4	0	9	13	36	63	0	99	0	0	0	0	0	43	46	89	201
-	Total	24	0	37	61	163	309	0	472	0	0	0	0	0	165	258	423	956
	04:00 PM	8	0	22	30	32	117	0	149	0	0	0	0	0	52	60	112	291
	04:15 PM	10	ŏ	14	24	26	143	0	169	0	0	0	ő	0	52	64	116	309
	04:30 PM	5	Õ	7	12	34	157	0	191	0	n	0	0	0	42	60	102	305
	04:45 PM	10	o	17	27	36	169	0	205	0	0	0	ő	0	42	86	128	360
	Total	33	0	60	93	128	586	0	714	0	0	0	0	0	188	270	458	1265
	05:00 PM	7	0	16	23	44	166	0	210	0	0	0	0]	0	44	60	104	337
	05:15 PM	12	0	13	25	35	152	0	187	0	0	0	0	0	65	65	130	342
	05:30 PM	5	0	13	18	25	126	0	151	0	0	0	0	0	51	60	111	280
	05:45 PM	4	0	10	14	31	107	0	138	0	0	0	0	0	65	57	122	274
	Total	28	0	52	80	135	551	0	686	0	0	0	0	0	225	242	467	1233
	Grand Total	113	0	194	307	634	1657	0	2291	0	0	0	0	0	797	1119	1916	4514
	Apprch %	36.8	0	63.2		27.7	72.3	0		0	0	0		0	41.6	58.4		
	Total %	2.5	0	4.3	6.8	14	36.7	0	50.8	0	0	0	0	0	17.7	24.8	42.4	

http:de-traffic.com I-95 SB Ramp at SR 46 Brevard County, FL

File Name : I_95 SB at 46 Site Code : 00000002 Start Date : 10/10/2018 Page No : 2

Groups Printed- Automobiles - Commercial

31						Group	is Filling	d-Automo	blies - Co	mmerci	di						
		I-95 SI	3 Ramp			SF	46			N	I/A			SF	R 46		
		South	bound			West	bound			North	bound			East	bound		
	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right]	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.01		
Automobiles	106	0	166	272	603	1641	0	2244	0	0	0	0	0	782	1070	1852	4368
% Automobiles	93.8	0	85.6	88.6	95.1	99	0	97.9	0	0	0	0	0	98.1	95.6	96.7	96.8
Commercial	7	0	28	35	31	16	0	47	0	0	0	0	0	15	49	64	146
% Commercial	6.2	0	14.4	11.4	4.9	1	0	2.1	0	0	0	0	0	1.9	4.4	3.3	3.2


http:de-traffic.com I-95 SB Ramp at SR 46 Brevard County, FL

File Name : I_95 SB at 46 Site Code : 00000002 Start Date : 10/10/2018 Page No : 3

		1-95 SE	Ramp			SR	46			N	/A			SR	46		ľ
		South	bound			Westl	bound			North	bound			Easth	oound		
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right A	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analys	is From (07:00 AN	1 to 08:4	5 AM - Pea	ak 1 of 1												
Peak Hour for Ent	ire Inters	ection Be	egins at	07:15 AM													
07:15 AM	5	0	18	23	54	63	0	117	0	0	0	0	0	58	88	146	286
07:30 AM	12	0	6	18	47	42	0	89	0	0	0	0	0	46	61	107	214
07:45 AM	7	0	12	19	58	54	0	112	0	0	0	0	0	80	112	192	323
08:00 AM	8	0	13	21	- 51	95	0	146	0	0	0	0	0	54	100	154	321
Total Volume	32	Ō	49	81	210	254	0	464	0	0	0	0	0	238	361	599	1144
% App. Total	39.5	0	60.5	1	45.3	54.7	0		0	0	0		0	39.7	60.3		
PHF	.667	.000	.681	.880	.905	.668	.000	.795	.000	.000	.000	.000	.000	.744	.806	.780	.885
Automobiles	28	0	42	70	199	250	0	449	0	0	0	0	0	230	344	574	1093
% Automobiles	87.5	0	85.7	86.4	94.8	98.4	0	96.8	0	0	0	0	0	96.6	95.3	95.8	95.5
Commercial	4	0	7	11	11	4	0	15	0	0	0	0	0	8	17	25	51
% Commercial	12.5	0	14.3	13.6	5.2	1.6	0	3.2	0	0	0	0	0	3.4	4.7	4.2	4.5

http:de-traffic.com I-95 SB Ramp at SR 46 Brevard County, FL

File Name : I_95 SB at 46 Site Code : 00000002 Start Date : 10/10/2018 Page No : 4

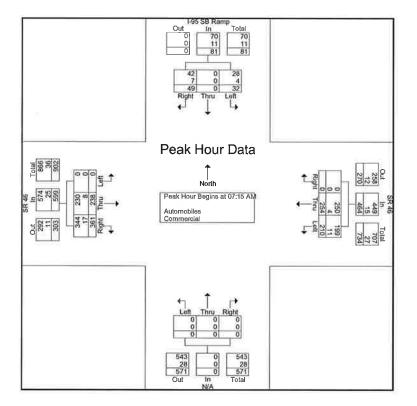


http:de-traffic.com I-95 SB Ramp at SR 46 Brevard County, FL

File Name : I_95 SB at 46 Site Code : 00000002 Start Date : 10/10/2018 Page No : 5

			Ramp			SR	46			N	/A			SR	46		
		South	bound			Westl	bound			North	bound			Easth	oound		
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	pp. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analys	sis From 0	4:00 PN	1 to 05:4	5 PM - Pea	ak 1 of 1						-	**	-			1.7.	
Peak Hour for Ent	tire Interse	ection B	egins at	04:30 PM													
04:30 PM	5	0	7	12	34	157	0	191	0	0	0	0	0	42	60	102	305
04:45 PM	10	0	17	27	36	169	0	205	0	0	0	0	0	42	86	128	360
05:00 PM	7	0	16	23	44	166	0	210	0	0	0	0	0	44	60	104	337
05:15 PM	12	0	13	25	35	152	0	187	0	0	0	0	0	65	65	130	342
Total Volume	34	0	53	87	149	644	0	793	0	0	0	0	0	193	271	464	1344
% App. Total	39.1	0	60.9		18.8	81.2	0		0	0	0		0	41.6	58.4		
PHF	.708	.000	.779	.806	.847	.953	.000	.944	.000	.000	.000	.000	.000	.742	.788	.892	.933
Automobiles	32	0	50	82	143	641	0	784	0	0	0	0	0	190	268	458	1324
% Automobiles	94.1	0	94.3	94.3	96.0	99.5	0	98.9	0	0	0	0	0	98.4	98.9	98.7	98.5
Commercial	2	0	3	5	6	3	0	9	0	0	0	0	0	3	3	6	20
% Commercial	5.9	0	5.7	5.7	4.0	0.5	0	1.1	0	0	0	0	0	1.6	1.1	1.3	1.5

http:de-traffic.com I-95 SB Ramp at SR 46 Brevard County, FL

File Name : I_95 SB at 46 Site Code : 00000002 Start Date : 10/10/2018 Page No : 6

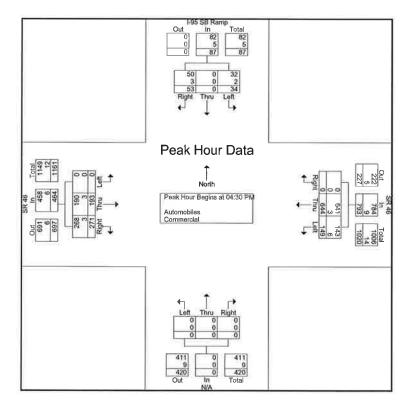

http:de-traffic.com I-95 NB Ramp at SR 46 Brevard County, FL

File Name : I_95 NB at 46 Site Code : 00000003

Start Date : 10/10/2018 Page No : 1

Groups Printed- Automobiles - Commercial

								d- Automol	biles - Co								
			/A				46				3 Ramp				₹ 46		
			bound				bound				bound				bound		
Start Time	Left	Thru		App. Total	Left	Thru		App. Total	Left	Thru		App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
07:00 AM	0	0	0	0	0	68	8	76	32	0	19	51	9	24	0	33	160
07:15 AM	0	0	0	0	0	58	13	71	61	0	30	91	7	48	0	55	217
07:30 AM	0	0	0	0	0	53	10	63	35	0	26	61	4	52	0	56	180
07:45 AM	0	0	0	0	0	71	9	80	40	0	27	67	11	69	0	80	227
Total	0	0	0	0	0	250	40	290	168	0	102	270	31	193	0	224	784
08:00 AM	0	0	0	0	0	96	8	104	49	0	30	79	13	41	0	54	237
08:15 AM	0	0	0	0	0	83	5	88	30	0	28	58	10	36	0	46	192
08:30 AM	0	0	0	0	0	77	8	85	35	0	29	64	6	42	0	48	197
08:45 AM	0	0	0	0	0	61	9	70	42	0	25	67	10	36	0	46	183
Total	0	0	0	0	0	317	30	347	156	0	112	268	39	155	0	194	809
04:00 PM	0	0	0	0	0	65	6	71	88	0	47	135	9	52	0	61	267
04:15 PM	0	0	0	0	0	102	4	106	73	Ō	70	143	10	54	Õ	64	313
04:30 PM	0	0	0	0	0	110	9	119	93	Ō	66	159	8	41	Ö	49	327
04:45 PM	0	0	0	o l	0	108	12	120	87	0	59	146	8	45	0	53	319
Total	0	0	0	0	0	385	31	416	341	0	242	583	35	192	0	227	1226
05:00 PM	0	0	0	0	0	115	10	125	84	0	53	137	15	37	0	52	314
05:15 PM	0	0	0	0	0	96	9	105	96	0	58	154	10	64	0	74	333
05:30 PM	0	0	0	0	0	57	2	59	98	0	79	177	8	52	0	60	296
05:45 PM	0	0	0	0	0	62	6	68	73	0	50	123	_11	59	0	70	261
Total	0	0	0	0	0	330	27	357	351	0	240	591	44	212	0	256	1204
Grand Total	0	0	0	0	0	1282	128	1410	1016	0	696	1712	149	752	0	901	4023
Apprch %	0	0	0		0	90.9	9.1		59.3	0	40.7		16.5	83.5	0		
Total %	0	0	0	0	0	31.9	3.2	35	25.3	0	17.3	42.6	3.7	18.7	0	22.4	

http:de-traffic.com I-95 NB Ramp at SR 46 Brevard County, FL

File Name : I_95 NB at 46 Site Code : 00000003 Start Date : 10/10/2018 Page No : 2

Groups Printed- Automobiles - Commercial

						Olou	SO LIHITO	d- Addonio	DII62 - CC	ALLIE CIC	3 1						
		N	l/A			SF	46			I-95 N	B Ramp			SF	₹ 46		
		South	bound			West	bound			North	bound			East	bound		
	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
Automobiles	0	0	0	0	0	1264	123	1387	967	0	669	1636	135	736	Ó	871	3894
% Automobiles	0	0	0	0	0	98.6	96.1	98.4	95.2	0	96.1	95.6	90.6	97.9	0	96.7	96.8
Commercial	0	0	0	0	0	18	5	23	49	0	27	76	14	16	0	30	129
% Commercial	0	0	0	0	0	1.4	3.9	1.6	4.8	0	3.9	4.4	9.4	2.1	0	3.3	3.2


DE TRAFFIC

http://de-traffic.com
I-95 NB Ramp at SR 46
Brevard County, FL

File Name: I_95 NB at 46
Site Code: 00000003
Start Date: 10/10/2018
Page No: 3

		N/				SF	₹ 46			I-95 N	3 Ramp			SR	R 46		T .
		South	bound			West	bound			North	bound			Easth	oound		
Start Time	Left	Thru	Right [A	pp. Total	Left	Thru	Right A	pp. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analys	is From (7:00 AN	1 to 08:45	AM - Pea	k 1 of 1												
Peak Hour for Ent	ire Interse	ection Be	egins at 0	7:15 AM													
07:15 AM	0	0	0	0	0	58	13	71	61	0	30	91	7	48	0	55	217
07:30 AM	0	0	0	0	0	53	10	63	35	0	26	61	4	52	0	56	180
07:45 AM	0	0	0	0	0	71	9	80	40	0	27	67	11	69	0	80	227
08:00 AM	0	0	0	0	0	96	8	104	49	0	30	79	13	41	0	54	237
Total Volume	0	0	0	0	0	278	40	318	185	0	113	298	35	210	0	245	861
% App. Total	0	0	0		0	87.4	12.6		62.1	0	37.9		14.3	85.7	0		
PHF	.000	.000	.000	.000	.000	.724	.769	.764	.758	.000	.942	.819	.673	.761	.000	.766	.908
Automobiles	0	0	0	0	0	272	38	310	166	0	106	272	33	206	0	239	821
% Automobiles	0	0	0	0	0	97.8	95.0	97.5	89.7	0	93.8	91.3	94.3	98.1	0	97.6	95.4
Commercial	0	0	0	0	0	6	2	8	19	0	7	26	2	4	0	6	40
% Commercial	0	0	0	0	0	2.2	5.0	2.5	10.3	0	6.2	8.7	5.7	1.9	0	2.4	4.6

http:de-traffic.com I-95 NB Ramp at SR 46 Brevard County, FL

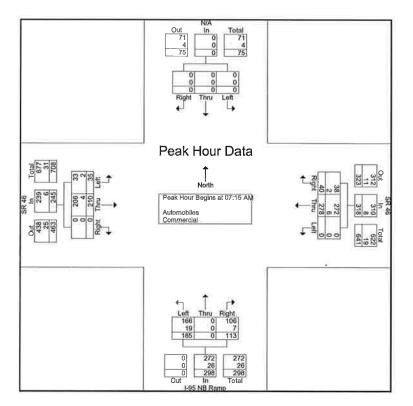

File Name : I_95 NB at 46 Site Code : 00000003 Start Date : 10/10/2018 Page No : 4

DE TRAFFIC

http::de-traffic.com
I-95 NB Ramp at SR 46
Brevard County, FL


File Name : I_95 NB at 46 Site Code : 00000003

Start Date : 10/10/2018 Page No : 5

		N/ South				-	R 46 bound			I-95 NE North	Ramp bound			SR Eastb			
Start Time	Left	Thru	Right A	pp. Total	Left	Thru	Right	App. Total	Left	Thru		pp. Total	Left	Thru	Right A	op. Total	Int. Total
Peak Hour Analys	is From (04:00 PN	1 to 05:45	PM - Pea	k 1 of 1												
Peak Hour for Ent	ire Inters	ection Be	egins at 0	4:30 PM													
04:30 PM	0	0	0	0	0	110	9	119	93	0	66	159	8	41	0	49	327
04:45 PM	0	0	0	0	0	108	12	120	87	0	59	146	8	45	0	53	319
05:00 PM	0	0	0	0	0	115	10	125	84	0	53	137	15	37	0	52	314
05:15 PM	0	0	0	0	0	96	9	105	96	0	58	154	10	64	0	74	333
Total Volume	0	0	0	0	0	429	40	469	360	0	236	596	41	187	0	228	1293
% App. Total	0	0	0		0	91.5	8.5		60.4	0	39.6		18	82	0		
PHF	.000	.000	.000	.000	.000	.933	.833	.938	.938	.000	.894	.937	.683	.730	.000	.770	.971
Automobiles	0	0	0	0	0	425	39	464	345	0	231	576	41	184	0	225	1265
% Automobiles	0	0	0	0	0	99.1	97.5	98.9	95.8	0	97.9	96.6	100	98.4	0	98.7	97.8
Commercial	0	0	0	0	0	4	1	5	15	0	5	20	0	3	0	3	28
% Commercial	0	0	0	0	0	0.9	2.5	1.1	4.2	0	2.1	3.4	0	1.6	0	1.3	2.2

http:de-traffic.com I-95 NB Ramp at SR 46 Brevard County, FL

File Name : I_95 NB at 46 Site Code : 00000003 Start Date : 10/10/2018 Page No : 6

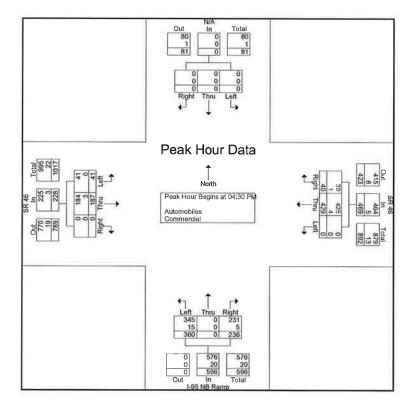



NB Approach





WB Approach



at SR 46	Brevard	County
www.de-traffic.com	Project	Sheet
299 McGregor Rd. DeLand Fl. 32720	Project Number: L18-66	Number: 1





WB Approach

de Braffic

I-95 SB Ramp at SR 46

Brevard County

www.de-traffic.com

299 McGregor Rd. DeLand Fl. 32720

Project Number: L18-66

Sheet Number: 2



NB Approach



WB Approach

I-95 NB Ramp at SR 46

Brevard County

www.de-traffic.com 299 McGregor Rd. DeLand Fl. 32720

Project Number: L18-66

Sheet Number: 3

http:de-traffic.com Indian River Pkwy at SR 46 Brevard County, FL

File Name: Hammock at SR 46 Site Code: 00000002 Start Date: 11/13/2018

Page No : 1

Groups Printed- Automobiles - Commercial

								d- Automol	olles - Co								
		Indian R		/y		SR	46			Hammo	ck Trail			SF	₹ 46		
			bound			West	bound			North	bound			East	oound		
Start Time	Left	Thru		App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
08:00 AM	4	0	7	11	4	109	9	122	3	0	1	4	7	71	0	78	215
08:15 AM	3	0	7	10	8	103	1	112	7	0	3	10	4	89	1	94	226
08:30 AM	10	0	9	19	12	113	3	128	6	0	3	9	10	101	0	111	267
08:45 AM	4	1	4	9	15	111	2	128	7	0	8	15	12	97	0	109	261
Total	21	1	27	49	39	436	15	490	23	0	15	38	33	358	1	392	969
09:00 AM	2	0	6	8	7	88	6	101	7	0	5	12	10	58	0	68	189
09:15 AM	7	0	5	12	11	77	- 1	89	10	0	6	16	7	72	0	79	196
09:30 AM	5	0	5	10	8	63	1	72	7	1	4	12	3	64	0	67	161
09:45 AM	4	0	4	8	6	56	1	63	9	1_	4	14	3	58	1	62	147
Total	18	0	20	38	32	284	9	325	33	2	19	54	23	252	1	276	693
05:00 PM	8	1	5	14	8	93	3	104	9	0	5	14	10	100	2	112	244
05:15 PM	1	0	3	4	3	93	8	104	4	0	6	10	5	117	0	122	240
05:30 PM	4	0	6	10	9	80	4	93	5	0	1	6	7	103	0	110	219
05:45 PM	2	0	9	11	8	110	3	121	4	0	7	11	4	101	0	105	248
Total	15	1	23	39	28	376	18	422	22	0	19	41	26	421	2	449	951
06:00 PM	7	0	4	11	3	97	3	103	5	0	1	6	6	118	0	124	244
06:15 PM	5	2	7	14	5	95	7	107	7	0	5	12	9	141	0	150	283
06:30 PM	3	1	7	11	8	114	9	131	7	0	3	10	7	109	2	118	270
06:45 PM	8	0	6	14	6	86	10	102	4	0	4	8	8	106	1	115	239
Total	23	3	24	50	22	392	29	443	23	0	13	36	30	474	3	507	1036
Grand Total	77	5	94	176	121	1488	71	1680	101	2	66	169	112	1505	7	1624	3649
Apprch %	43.8	2.8	53.4		7.2	88.6	4.2		59.8	1.2	39.1		6.9	92.7	0.4		
Total %	2.1	0.1	2.6	4.8	3.3	40.8	1.9	46	2.8	0.1	1.8	4.6	3.1	41,2	0.2	44.5	

http:de-traffic.com Indian River Pkwy at SR 46 Brevard County, FL

File Name : Hammock at SR 46

Site Code : 00000002 Start Date : 11/13/2018 Page No : 2

Groups Printed- Automobiles - Commercial

						Giou	os Finite	ad- Automo	DII62 - OF	minercia	aı						
		ndian Ri	ver Pkv	vy		SF	₹ 46			Hamm	ock Trai	1		SF	₹ 46		1
		South	bound			West	bound			North	bound			East	bound		
	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
Automobiles	76	4	91	171	121	1443	68	1632	100	2	63	165	112	1463	7	1582	3550
% Automobiles	98.7	80	96.8	97.2	100	97	95.8	97.1	99	100	95.5	97.6	100	97.2	100	97.4	97.3
Commercial	1	34	3	5	0	45	3	48	- 1	0	3	4	0	42	0	42	99
% Commercial	1.3	20	3.2	2.8	0	3	4.2	2.9	1	0	4.5	2.4	0	2.8	0	2.6	2.7

DE TRAFFIC

http:de-traffic.com
Indian River Pkwy at SR 46
Brevard County, FL

File Name : Hammock at SR 46


Site Code : 00000002 Start Date : 11/13/2018 Page No : 3

			ver Pkwy			SR	46			Hammo	ck Trail			SR	46			
	-	South	bound			Westl	oound			North	oound			Eastk	ound			
Start Time	Left	Thru	Right A	pp. Total	Left	Thru	Right A	op. Total	Left	Thru	Right	App. Total	Left	Thru	Right A	p. Total	Int.	Total
Peak Hour Analys	is From (08:00 AN	to 08:45	AM - Pea	k 1 of 1													
Peak Hour for Ent	ire Inters	ection Be	egins at 0	MA 00:8														
08:00 AM	4	0	7	11	4	109	9	122	3	0	1	4	7	71	0	78		215
08:15 AM	3	0	7	10	8	103	1	112	7	0	3	10	4	89	1	94		226
08:30 AM	10	0	9	19	12	113	3	128	6	0	3	9	10	101	0	111		267
08:45 AM	4	1_	4	9	15	111	2	128	7	0	8	15	12	97	0	109		261
Total Volume	21	1	27	49	39	436	15	490	23	0	15	38	33	358	1	392		969
% App. Total	42.9	2	55.1		8	89	3.1		60.5	0	39.5		8.4	91.3	0.3			
PHF	.525	.250	.750	.645	.650	.965	.417	.957	.821	.000	.469	.633	.688	.886	.250	.883		.907
Automobiles	20	0	27	47	39	417	13	469	23	0	14	37	33	343	1	377		930
% Automobiles	95.2	0	100	95.9	100	95.6	86.7	95.7	100	0	93.3	97.4	100	95.8	100	96.2		96.0
Commercial	1	1	0	2	0	19	2	21	0	0	1	1	0	15	0	15		39
% Commercial	4.8	100	0	4.1	0	4.4	13.3	4.3	0	0	6.7	2.6	0	4.2	0	3.8		4.0

http:de-traffic.com Indian River Pkwy at SR 46 Brevard County, FL

File Name : Hammock at SR 46

Site Code : 00000002 Start Date : 11/13/2018

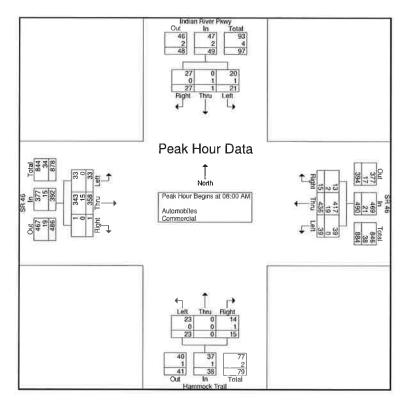

DE TRAFFIC

http://de-traffic.com
Indian River Pkwy at SR 46
Brevard County, FL

File Name 3 Hammock at SR 46


Site Code : 00000002 Start Date : 11/13/2018

		ndian Ri South	ver Pkwy bound	У			₹ 46 bound				ock Trail bound				46 Sound		
Start Time	Left [Thru	Right	App. Total	Left	Thru	Right /	App. Total	Left	Thru	Right /	App. Total	Left	Thru	Right I	App. Total	Int. Total
Peak Hour Analys	is From (4:00 PM	1 to 06:4	5 PM - Pea	ak 1 of 1												
Peak Hour for Ent	ire Inters	ection Be	egins at	05:45 PM													
05:45 PM	2	0	9	11	8	110	3	121	4	0	7	11	4	101	0	105	248
06:00 PM	7	0	4	11	3	97	3	103	5	0	1	6	6	118	0	124	244
06:15 PM	5	2	7	14	5	95	7	107	7	0	5	12	9	141	0	150	283
06:30 PM	3	1	7	11	8	114	9	131	7	0	3	10	7	109	2	118	270
Total Volume	17	3	27	47	24	416	22	462	23	0	16	39	26	469	2	497	1045
% App. Total	36.2	6.4	57.4		5.2	90	4.8		59	0	41		5.2	94.4	0.4		
PHF	.607	.375	.750	.839	.750	.912	.611	.882	.821	.000	.571	.813	.722	.832	.250	.828	.923
Automobiles	17	3	24	44	24	408	21	453	23	0	16	39	26	460	2	488	1024
% Automobiles	100	100	88.9	93.6	100	98.1	95.5	98.1	100	0	100	100	100	98.1	100	98.2	98.0
Commercial	0	0	3	3	0	8	1	9	0	0	0	0	0	9	0	9	21
% Commercial	0	0	11.1	6.4	0	1.9	4.5	1.9	0	0	0	0	0	1.9	0	1.8	2.0

http:de-traffic.com Indian River Pkwy at SR 46 Brevard County, FL

File Name : Hammock at SR 46

Site Code : 00000002 Start Date : 11/13/2018

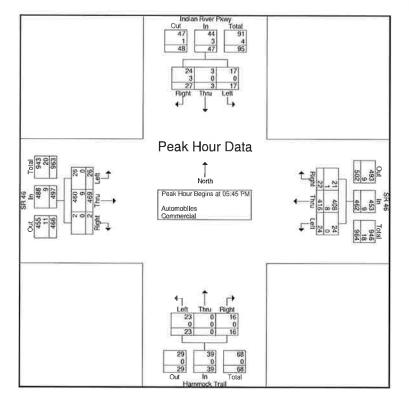

DE TRAFFIC

http:de-traffic.com

Pine Ave/Holder Rd at SR 46

Brevard County, FL

File Name: Pine at 46 Site Code: 00000001 Start Date: 11/13/2018 Page No: 1

								ed- Automob	oiles - Co	mmercia	d						
			Ave				46				er Rd			SF	₹ 46		
			bound			West	bound			North	bound			East	bound		
Start Time	Left	Thru		App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
08:00 AM	0	0	7	7	2	92	2	96	17	0	7	24	1	72	8	81	208
08:15 AM	4	1	9	14	5	78	0	83	14	2	6	22	1	70	19	90	209
08:30 AM	7	3	2	12	5	97	2	104	19	0	15	34	1	90	11	102	252
08:45 AM	3	2	- 5	10	23	92	6	121	32	0	12	44	2	77	23	102	277
Total	14	6	23	43	35	359	10	404	82	2	40	124	5	309	61	375	946
09:00 AM	2	2	6	10	12	73	2	87	22	1	8	31	1	51	14	66	194
09:15 AM	3	3	4	10	17	75	4	96	25	1	4	30	0	65	27	92	228
09:30 AM	2	1	1	4	4	62	1	67	12	3	5	20	1	69	11	81	172
09:45 AM	2	0	5	7	4	59	3	66	15	0	4	19	1	67	14	82	174
Total	9	6	16	31	37	269	10	316	74	5	21	100	3	252	66	321	768
05:00 PM	3	2	1	6 7	4	71	4	79	12	0	7	19	6	89	18	113	217
05:15 PM	2	2	3	7	12	82	2	96	18	4	4	26	4	83	21	108	237
05:30 PM	2	1	. 1	4	6	85	5	96	14	3	6	23	2	93	18	113	236
05:45 PM	1	4	2	7	10	83	6	99	. 11	1	5	17	3	86	22	111	234
Total	8	9	7	24	32	321	17	370	55	8	22	85	15	351	79	445	924
06:00 PM	2	2	3	7 [9	120	2	131 I	21	4	7	32	2	88	13	103	273
06:15 PM	10	1	3	14	9	89	6	104	15	2	11	28	3	99	35	137	283
06:30 PM	6	1	5	12	10	79	8	97	24	3	11	38	2	109	32	143	290
06:45 PM	3	1	3	7	10	77	5	92	16	0	11	27	6	96	21	123	249
Total	21	5	14	40	38	365	21	424	76	9	40	125	13	392	101	506	1095
Grand Total Approh %	52 37,7	26 18.8	60 43.5	138	142 9.4	1314 86.8	58 3.8	1514	287 66.1	24 5.5	123 28.3	434	36 2,2	1304 79.2	307 18.6	1647	3733
Total %	1.4	0.7	1.6	3.7	3.8	35.2	1.6	40.6	7.7	0.6	3.3	11.6	1	34.9	8.2	44.1	

http:de-traffic.com Pine Ave/Holder Rd at SR 46 Brevard County, FL

File Name : Pine at 46
Site Code : 00000001
Start Date : 11/13/2018
Page No : 2

Groups Printed- Automobiles - Commercial

						Grou	os Printe	an- Antomo	biles - Co	mmercia	31						
		Pine	e Ave			SF	3 46			Hold	ler Rd			SF	3 46		
		Southbound				West	bound			North	bound			East	bound		
	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Factor	1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		1.0	1.0	1.0		
Automobiles	49	25	57	131	136	1267	54	1457	283	23	120	426	36	1270	303	1609	3623
% Automobiles	94.2	96.2	95	94.9	95.8	96.4	93.1	96.2	98.6	95.8	97.6	98.2	100	97.4	98.7	97.7	97.1
Commercial	3	1	3	7	6	47	4	57	4	1	3	8	0	34	4	38	110
% Commercial	5.8	3.8	5	5.1	4.2	3.6	6.9	3.8	1.4	4.2	2.4	1.8	0	2.6	1.3	2.3	2.9

http:de-traffic.com Pine Ave/Holder Rd at SR 46 Brevard County, FL

> File Name: Pine at 46 Site Code: 00000001


Start Date : 11/13/2018 Page No : 3

	Pine Ave Southbound				SR 46 Westbound				Holder Rd Northbound				SR 46 Eastbound				
																	1
Start Time	Left	Thru	Right A	App. Total	Left	Thru	Right A	App. Total	Left	Thru	Right A	App. Total	Left	Thru	Right A	App. Total	Int. Total
Peak Hour Analys	sis From C	08:00 AM	to 08:45	AM - Pea	k 1 of 1												
Peak Hour for En	tire Interse	ection Be	egins at 0	8:00 AM													
08:00 AM	0	0	7	7	2	92	2	96	17	0	7	24	1	72	8	81	208
08:15 AM	4	1	9	14	5	78	0	83	14	2	6	22	1	70	19	90	209
08:30 AM	7	3	2	12	5	97	2	104	19	0	15	34	1	90	11	102	252
08:45 AM	3	2	5	10	23	92	6	121	32	0	12	44	2	77	23	102	277
Total Volume	14	6	23	43	35	359	10	404	82	2	40	124	5	309	61	375	946
% App. Total	32.6	14	53.5		8.7	88.9	2.5		66.1	1.6	32.3		1.3	82.4	16.3		
PHF	.500	.500	.639	.768	.380	.925	.417	.835	.641	.250	.667	.705	.625	.858	.663	.919	.854
Automobiles	11	6	22	39	33	344	9	386	81	1	39	121	5	297	59	361	907
% Automobiles	78.6	100	95.7	90.7	94.3	95.8	90.0	95.5	98.8	50.0	97.5	97.6	100	96.1	96.7	96.3	95.9
Commercial	3	0	1	4	2	15	1	18	1	1	1	3	0	12	2	14	39
% Commercial	21.4	0	4.3	9.3	5.7	4.2	10.0	4.5	1.2	50.0	2.5	2.4	0	3.9	3.3	3.7	4.1

DE TRAFFIC

http:de-traffic.com Pine Ave/Holder Rd at SR 46 Brevard County, FL

File Name : Pine at 46 Site Code @ 00000001 Start Date : 11/13/2018
Page No : 4

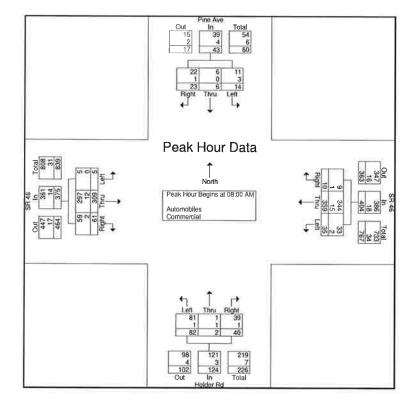

DE TRAFFIC

http:de-traffic.com Pine Ave/Holder Rd at SR 46 Brevard County, FL

File Name: Pine at 46 Site Code : 00000001 Start Date : 11/13/2018 Page No : 5


		Pine	Ave			SR	1 46			Hold	er Rd			SR	46		
		South	bound			West	bound			North	bound			Easth	oound		
Start Time	Left	Thru	Right A	op. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right] A	pp. Total	Int. Total
Peak Hour Analys	sis From (04:00 PN	1 to 06:45	PM - Pea	ak 1 of 1							100					
Peak Hour for En	tire Inters	ection Be	egins at 0	6:00 PM													
06:00 PM	2	2	3	7	9	120	2	131	21	4	7	32	2	88	13	103	273
06:15 PM	10	1	3	14	9	89	6	104	15	2	11	28	3	99	35	137	283
06:30 PM	6	1	5	12	10	79	8	97	24	3	11	38	2	109	32	143	290
06:45 PM	3	1	3	7	10	77	5	92	16	0	11	27	6	96	21	123	249
Total Volume	21	5	14	40	38	365	21	424	76	9	40	125	13	392	101	506	1095
% App. Total	52.5	12.5	35		9	86.1	- 5		60.8	7.2	32		2.6	77.5	20		
PHF	.525	.625	.700	.714	.950	.760	.656	.809	.792	.563	.909	.822	.542	.899	.721	.885	.944
Automobiles	21	5	14	40	38	358	21	417	75	9	40	124	13	385	100	498	1079
% Automobiles	100	100	100	100	100	98.1	100	98.3	98.7	100	100	99.2	100	98.2	99.0	98.4	98.5
Commercial	0	0	0	0	0	7	0	7	1	0	0	1	0	7	1	8	16
% Commercial	0	0	0	0	0	1.9	0	1.7	1.3	0	0	0.8	0	1.8	1.0	1.6	1,5

DE TRAFFIC

http:de-traffic.com Pine Ave/Holder Rd at SR 46 Brevard County, FL

> File Name : Pine at 46 Site Code : 00000001 Start Date : 11/13/2018

Page No : 6

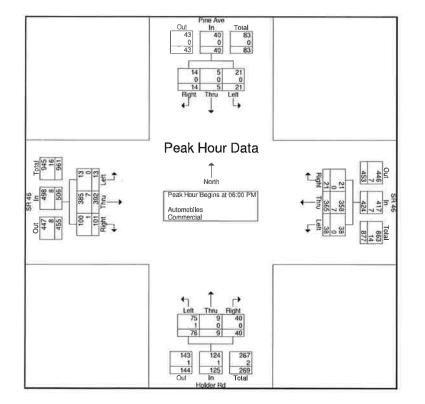



NB Approach



EB Approach



SB Approach



WB Approach



Indian River Pkwy/Hammock Trail at SR 46

Brevard County

www.de-traffic.com

299 McGregor Rd. DeLand Fl. 32720

Project Number: L18-79 Sheet Number: 1



NB Approach



EB Approach



SB Approach



WB Approach



Holder Rd/Pine Ave at SR 46

www.de-traffic.com

299 McGregor Rd. DeLand Fl. 32720

VVB Approach

Brevard County

Project Number: L18-79 Sheet Number: 2

70 0002 ON SR 46, 0.735 MI. E OF I-95 08/02/2017 1000

COUNTY: STATION: DESCRIPTION: START DATE: START TIME:

=:=:=:=:=:=	aereer:	DIR	ECTION:	Е			DIRE	CTION:	W		COMBINED
TIME	1ST	2ND	3RD	4TH	TOTAL	1ST	2ND	3RD	4TH	TOTAL	TOTAL
0000	9	13	4	5	31	12	6	5	4	27	58
0100	6	3	5	7	21	3	4	4	4	15	36
0200	2	1	6	2	11	2	4	7	6	19	30
0300	2	7	5	3	17	4	5	5	4	18	35
0400	8	7	8	14	37	9	14	15	16	54	91
0500	18	19	19	38	94	22	37	45	44	148	242
0600	46	50	59	67	222	38	67	71	73	249	471
0700	61	57	83	105	306	71	79	86	75	311	617
0800	57	54	66	63	240	76	71	59	66	272	512
0900	65	70	65	68	268	61	63	63	59	246	514
1000	72	64	70	51	257	66	74	67	65	272	529
1100	68	81	73	65	287	67	64	59	68	258	545
1200	64	61	76	84	285	79	60	77	75	291	576
1300	60	69	74	72	275	71	67	72	65	275	550
1400	64	70	67	66	267	81	68	64	70	283	550
1500	61	68	61	100	290	77	76	8.0	86	319	609
1600	91	86	93	77	347	114	81	93	87	375	722
1700	75	84	114	79	352	90	109	91	84	374	726
1800	75	109	92	79	355	83	58	61	76	278	633
1900	55	61	68	48	232	60	46	48	62	216	448
2000	58	60	30	43	191	54	51	41	46	192	383
2100	38	33	35	19	125	31	32	31	29	123	248
2200	21	18	26	19	84	17	15	12	24	68	152
2300	13	16	16	15	60	11	15	12	8	46	106
24-HOU	R TOTALS	3:			4654					4729	9383
				p	EAK VOLU	ME INFORM	MOTTAN				

			PEAK VOLUME	INFORMATION			
	DIRECT	ION: E	DIREC	TION: W	COMBINED	DIRECTIONS	
	HOUR	VOLUME	HOUR	VOLUME	HOUR	VOLUME	
A.M.	700	306	715	316	715	618	
P.M.	1730	377	1630	379	1545	744	
DAILY	1730	377	1630	379	1545	744	
TRUCK E	PERCENTAGE	8.70		8.12		8.41	

CLASSIFICATION SUMMARY DATABASE

DIR	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	TOTTRK	TOTVOL
E	11	3012	1226	20	251	36	3	60	30	4	1	0	0	0	0	405	4654
W	15	3005	1325	22	240	34	3	39	38	7	1	0	0	0	0	384	4729

GENERATED BY SPS 5.0.53P

COUNTY: 70
STATION: 0416
DESCRIPTION: ON SR-46, 2.478 MI. W OF I-95 (RCLP)
START DATE: 08/08/2017
START TIME: 1130

			ECTION:					ECTION:	W		COMBINE
TIME	1ST	2ND	3RD	4TH	TOTAL	1ST	2ND	3RD	4TH	TOTAL	TOTAL
0000	6	4	1	4	15	3	6	9	5	23	38
0100	2	3	5	1	11	6	2	1	1	10	21
0200	2	2	1	0	5	2	1	4	5	12	17
0300	2	2	2	6	12	4	3	3	1	11	23
0400	4	4	8	10	26	4	11	15	22	52	78
0500	18	16	47	48	129	31	35	24	36	126	255
0600	60	53	71	54	238	36	57	44	76	213	451
0700	53	68	66	58	245	55	64	70	57	246	491
0000	59	44	58	55	216	65	52	47	60	224	440
0900	48	48	63	45	204	47	39	43	41	170	374
1000	57	73	45	38	213	44	37	42	39	162	375
1100	53	45	41	53	192	42	47	35	37	161	353
1200	36	45	38	40	159	40	52	53	49	194	353
1300	43	46	41	70	200	45	41	44	53	183	383
1400	42	42	41	47	172	39	44	56	47	186	358
1500	37	43	56	47	183	46	59	51	67	223	406
1600	50	67	58	73	248	64	88	72	60	284	532
1700	72	68	71	69	280	81	78	97	67	323	603
1800	72	73	47	53	245	71	49	44	58	222	467
1900	55	46	41	36	178	42	29	33	25	129	307
2000	28	24	32	13	97	21	23	20	28	92	189
2100	25	18	11	22	76	22	29	26	12	89	165
2200	14	8	11	20	53	13	14	10	11	48	101
2300	15	4	7	4	30	14	6	3	4	27	57
24-HOU	R TOTAL:	5:			3427					3410	6837

			PEAK VOLUME	INFORMATION			
	DIREC'	TION: E	DIREC'	rion: W	COMBINED	DIRECTIONS	
	HOUR	VOLUME	HOUR	VOLUME	HOUR	VOLUME	
A.M.	715	251	645	265	715	507	
P . M .	1730	285	1700	323	1700	603	
DAILY	1730	285	1700	323	1700	603	
TRUCK E	PERCENTAGE	13.74		13.90		13.82	

CLASSIFICATION	CITMMIATO	DAMADACE
CDW221LICWIION	SUMMARI	DATADASE

DID	-1		2		-	_	-			1.0	9190	1.0	1.5	1.4	1 -	mommp v	momitor.
																	TOTVOL
E	2	2204	750	21	170	39	0	97	141	3	0	0	0	0	0	471	3427
W	5	2179	752	27	168	13	11	115	113	27	0	0	0	0	0	474	3410

GENERATED BY SPS 5.0.53P

COUNTY: 70 STATION: 0416 DESCRIPTION: ON SR-46, 2.478 MI. W OF I-95 (RCLP) START DATE: 08/09/2017 START TIME: 1130

			ECTION:				DIR	ECTION:	W		COMBINE
TIME	1ST	2ND	3RD	4TH	TOTAL	1ST	2ND	3RD	4TH	TOTAL	TOTAL
0000	5	3	4	7	19	5	9	3	6	23	42
0100	7	4	4	2	17	6	6	5	1	18	35
0200	3	3	2	1	9	1	3	2	6	12	21
0300	2	5	4	4	15	1	3	6	3	13	28
0400	9	6	9	11	35	8	18	16	19	61	96
0500	13	25	43	67	148	32	47	43	41	163	311
0600	43	70	70	51	234	55	62	53	56	226	460
0700	68	62	59	73	262	60	56	52	60	228	490
0000	59	50	63	57	229	72	57	58	60	247	476
0900	58	50	56	44	208	46	36	43	59	184	392
1000	47	45	72	67	231	57	38	41	48	184	415
1100	45	46	44	52	187	54	48	54	62	218	405
1200	47	49	31	59	186	37	47	52	48	184	370
1300	59	40	38	52	189	57	40	33	35	165	354
1400	64	51	62	48	225	72	49	45	55	221	446
1500	47	44	45	41	177	44	70	75	82	271	448
1600	57	63	66	86	272	74	73	85	86	318	590
1700	62	71	68	87	288	81	94	82	69	326	614
1800	83	61	56	49	249	73	48	76	42	239	488
1900	41	43	36	27	147	36	41	34	37	148	295
2000	41	54	47	34	176	30	34	25	30	119	295
2100	35	29	16	19	99	31	17	17	14	79	178
2200	21	15	18	5	59	14	14	11	13	52	111
2300	6	11	7	8	32	8	5	5	6	24	56
24 - HOIII	R TOTALS				3693			×		3723	7416

			PEAK VOLUME	INFORMATION		
	DIRECT	ION: E	DIREC	TION: W	COMBINED	DIRECTIONS
	HOUR	VOLUME	HOUR	VOLUME	HOUR	VOLUME
A.M.	700	262	745	247	715	493
P.M.	1715	309	1630	346	1630	631
DAILY	1715	309	1630	346	1630	631
TRUCK	PERCENTAGE	12.13		11.82		11.97

CLASSIFICATION SUMMARY DATABASE

DIR	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	TOTTRK	TOTVOL
E	6	2366	873	19	165	19	0	110	130	5	0	0	0	0	0	448	3693
W	4	2426	853	21	158	16	3	115	105	22	0	0	0	0	0	440	3723

GENERATED BY SPS 5.0.53P

APPENDIX D

UNSIGNALIZED INTERSECTION SYNCHRO WORKSHEETS – EXISTING CONDITIONS

Intersection	door 3	8 80 V	NE LEG	VE CO	100,60	S S I W	AS TYPE	Day 1	S. Million	21.60	Die	17.50	2 10
Int Delay, s/veh	3.2												
Movement	EBT	EBR	WBL	WBT	NBL	NBR			3		100	7 7 7 5 7	
Lane Configurations	1→		ħ	†	Y								
Traffic Vol, veh/h	470	29	85	322	19	141							
Future Vol, veh/h	470	29	85	322	19	141							
Conflicting Peds, #/hr	0	0	0	0	0	0							
Sign Control	Free	Free	Free	Free	Stop	Stop							
RT Channelized		None		None		None							
Storage Length	-	-	400		0	-							
Veh in Median Storage	e,# 0		-	0	0	-							
Grade, %	0	2	- 3	0	0	-							
Peak Hour Factor	94	94	94	94	94	94							
Heavy Vehicles, %	4	15	9	3	2	3							
Mvmt Flow	500	31	90	343	20	150							
	Major1		Major2		Minor1		U STAR						
Conflicting Flow All	0	0	531	0	1039	516							
Stage 1	-		-	-	516								
Stage 2	140	-	-	-	523	6.00							
Critical Hdwy	-		4.19		6.42	6.23							
Critical Hdwy Stg 1	-	¥.	-	-	5.42	: :							
Critical Hdwy Stg 2	-	- 2	-	~	5.42								
Follow-up Hdwy	- 14	-	2.281	27									
Pot Cap-1 Maneuver	112	-	1002	#	255	557							
Stage 1	-	2	:=:	¥.	599	-							
Stage 2	-	2			595								
Platoon blocked, %	=	2	ggreen	=		25000							
Mov Cap-1 Maneuver			1002	-	232	557							
Mov Cap-2 Maneuver	-	-		-	232	7.2							
Stage 1	- 12	- 10			545								
Stage 2		-			595	-							
A CONTRACTOR OF THE PARTY OF TH			1415		N/E						1.		
Approach	EB	OFTH	WB		NB	502/50		130	APL L		120	THE RE	Luci.
HCM Control Delay, s	0		1.9		16.6								
HCM LOS					С								
Minor Lane/Major Mvn	nt t	NBLn1	EBT	EBR	WBL	WBT	Ext. Antilia	7-10	OF REAL PROPERTY.		000	10.12.000	
Capacity (veh/h)		478	EDI	EDI.	1002	VVD1				-	12-11-1	All of the State o	11.83
HCM Lane V/C Ratio		0.356			0.09								
HCM Control Delay (s)		16.6	-		8.9								
HCM Lane LOS		C	-		0.9 A								
HCM 95th %tile Q(veh	1	1.6		-	0.3								
LICINI ADRI WING MIAN	1	1.0	-	_	0.3								

Intersection	S. Fin	VE 28 6	128,00	4 45	100	7.9 3	39 Sem	5 8 20 18	S. S. Fill	William -	100 8,0	THE S	279400
Int Delay, s/veh	2.7												
Movement	EBT	EBR	WBL	WBT	NBL	NBR	SIN OF SIN	1 1 1 8 8			W.Co.	of all a	Ariwales
Lane Configurations	^		ኻ	^	**								
Traffic Vol, veh/h	416	48	145	535	26	60							
Future Vol, veh/h	416	48	145	535	26	60							
Conflicting Peds, #/hr	0	0	0	0	0	0							
Sign Control	Free	Free	Free	Free	Stop	Stop							
RT Channelized	-	None	1.7.	None		None							
Storage Length	*	1990	400	-	0								
Veh in Median Storage	,# 0	100		0	0								
Grade, %	0	X.). 	0	0								
Peak Hour Factor	92	92	92	92	92	92							
Heavy Vehicles, %	2	2	2	2	2	2							
Mvmt Flow	452	52	158	582	28	65							
Major/Minor N	//ajor1		Major2		Minor1	374 15	with the second second	0177	cemin	m to de de		700	
Conflicting Flow All	0	0	504	0	1376	478			- 11 - 12		-2450		
Stage 1	-	-	504	-	478	4/0							
Stage 2	-				898	-							
Critical Hdwy		35.	4.12	-i	6.42	6.22							
Critical Hdwy Stg 1			4.12		5.42	0.22							
Critical Hdwy Stg 2		::#:	-	-	5.42								
Follow-up Hdwy			2.218	- 2	3.518								
Pot Cap-1 Maneuver			1061		160	587							
Stage 1			1001	-	624	507							
Stage 2					398	-							
Platoon blocked, %		-	.71		330	-							
Mov Cap-1 Maneuver		-i	1061		136	587							
Mov Cap-1 Maneuver					136								
Stage 1	7.			₩.	531								
	*				398	0.0							
Stage 2		mī		*	390	,							
Approach	EB	APPEN S	WB	ON	NB	TOLK		NAME OF		TR. Ken	J O III A	3/8/210	ST STATE
HCM Control Delay, s	0		1.9		22.9							111	
HCM LOS					С								
Minor Lane/Major Mvmt	1	VBLn1	EBT	EBR	WBL	WBT	ur della	T. Maria	DO DE TOTO			10 10 0	
Capacity (veh/h)		293	-	-	1061	-					VE.		
HCM Lane V/C Ratio		0.319	- 7	7.5	0.149								
HCM Control Delay (s)		22.9		1/25	9	N I Z							
HCM Lane LOS		C			A	-							
HCM 95th %tile Q(veh)		1.3		-	0.5								
TOWN SOUT MILE COLVERY)		1.0			0.0	- 5							

Int Delay, s/veh	Intersection	160	1007		8 8 3	MIN'S		7	THE R	45 R II		1150	ell 48
Lane Configurations		2.8											
Traffic Vol, veh/h	Movement	EBL	EBT	EBR		WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Traffic Vol, veh/h	Lane Configurations		1		ሻ	^					ሻ		7
Future Vol, veh/h Conflicting Peds, #hhr O O O O O O O O O O O O O O O O O O	Traffic Vol, veh/h	0		390			0	0	0	0		0	
Conflicting Peds, #hr Sign Control Free Stop Sto	Future Vol, veh/h	0	257	390	227	274	0	0	0	0	35	0	53
Sign Control Free RTC hannelized Free Pree RT Channelized Free Pree Pree Pree RT Channelized Stop None Stop None Stop None Stop Pree RT Channelized Stop Pree RT Channelized Stop Pree RT Channelized Stop Pree RT Channelized Stop RT Channelized <th< td=""><td>Conflicting Peds, #/hr</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td></td></th<>	Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	
RT Channelized - Yield - None - None - Yield Storage Length O - O - 1 - O - 1 - O - 1 - O - 1 - O - 1 - O - 1 - O - 1 - O - 1 - O - 1 - O - O		Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
Veh in Median Storage, # 0 - 0 - 16974 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 0 - 0 0 - 0 0 - 0 0 - 0 0 - 1 Malor Web Web 89 <td>RT Channelized</td> <td>-</td> <td></td> <td>Yield</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	RT Channelized	-		Yield									
Grade, % - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 - - 0 0 - 1 0 0 - 1 1 M M 0<	Storage Length	-		-	0	-	-			(=)	0		135
Grade, % - 0 - - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 0 963 89 80 80 80 80 80 80	Veh in Median Storage	,# -	0			0	-	(*)	16974			0	180
Heavy Vehicles, %			0	+	3.00	0	-	-	0	100	(**)		
Mymit Flow 0 289 438 255 308 0 0 0 39 0 60 Major/Minor Major1 Major2 Minor2 Minor2 Conflicting Flow All - 0 0 289 0 0 963 - 308 Stage 1 - - - - - 818 - - 308 Stage 2 - - - - - - 818 -	Peak Hour Factor	89	89	89	89	89	89	89	89	89	89	89	89
Mymit Flow 0 289 438 255 308 0 0 0 39 0 60 Major/Minor Major1 Major2 Minor2 Conflicting Flow All - 0 0 289 0 0 963 - 308 Stage 1 - - - - - - - - - 308 Stage 2 -<	Heavy Vehicles, %	2	3	5	5								
Conflicting Flow All		0	289	438	255	308	0	0					
Conflicting Flow All	Mainallian	4-5-4		7	1-1-0		11111						
Stage 1 - -<								7-16					000
Stage 2				0									308
Critical Hdwy - - 4.175 - - 6.795 - 6.41 Critical Hdwy Stg 1 -		-		7.0									
Critical Hdwy Stg 1 -		-		77		-							
Critical Hdwy Stg 2 -		-			4.175	W						11.5	6.41
Follow-up Hdwy													÷
Pot Cap-1 Maneuver 0 - - 1252 - 0 252 0 699 Stage 1 0 - - - 0 839 0 - Stage 2 0 - - - 0 839 0 - Platoon blocked, % - - - - - - - - 201 0 699 Mov Cap-1 Maneuver - - - - - 201 0 699 Mov Cap-1 Maneuver - - - - - 201 0 699 Mov Cap-2 Maneuver - - - - - 326 0 - - 326 0 - - 839 0 - - 839 0 - - 839 0 - - - 839 0 - - - - - - - - - - - - - - - - - - <td< td=""><td></td><td>-</td><td></td><td></td><td></td><td></td><td>1 15</td><td></td><td></td><td></td><td></td><td>11 :</td><td></td></td<>		-					1 15					11 :	
Stage 1 0 - - - 0 409 0 - Stage 2 0 - - - 0 839 0 - Platoon blocked, % -				-7									
Stage 2	-				1252								699
Platoon blocked, %				7:									57
Mov Cap-1 Maneuver - - 1252 - 201 0 699 Mov Cap-2 Maneuver - - - - - 201 0 - Stage 1 - - - - - 326 0 - Stage 2 - - - - - 839 0 - Approach EB WB WB SB -		0			*	-	0				839	0	
Mov Cap-2 Maneuver - - - - 326 0 - Stage 1 - - - - - 839 0 - Stage 2 - - - - - 839 0 - Approach EB WB WB SB -	The state of the s			-									
Stage 1				-	1252	-	175						699
Stage 2	· · · · · · · · · · · · · · · · · · ·	-		5		-							.(₩
Approach EB WB SB				-	(*)	-							
HCM Control Delay, s 0 3.9 17.2 HCM LOS	Stage 2		· ·	-			(1				839	0	::#:
HCM Control Delay, s 0 3.9 17.2 HCM LOS C Minor Lane/Major Mvmt EBT EBR WBL WBT SBLn1 SBLn2 Capacity (veh/h) - 1252 - 201 699 HCM Lane V/C Ratio - 0.204 - 0.196 0.085 HCM Control Delay (s) - 8.6 - 27.2 10.6 HCM Lane LOS - A - D B	Approach	FR		2000	WR		1000	1025		3811	SB		
Minor Lane/Major Mvmt EBT EBR WBL WBT SBLn1 SBLn2 Capacity (veh/h) - - 1252 - 201 699 HCM Lane V/C Ratio - - 0.204 - 0.196 0.085 HCM Control Delay (s) - - 8.6 - 27.2 10.6 HCM Lane LOS - - A - D B		10000000		1 - 10		200000							
Capacity (veh/h) - - 1252 - 201 699 HCM Lane V/C Ratio - - 0.204 - 0.196 0.085 HCM Control Delay (s) - - 8.6 - 27.2 10.6 HCM Lane LOS - A - D B		U			0.0								
Capacity (veh/h) - - 1252 - 201 699 HCM Lane V/C Ratio - - 0.204 - 0.196 0.085 HCM Control Delay (s) - - 8.6 - 27.2 10.6 HCM Lane LOS - A - D B													
HCM Lane V/C Ratio 0.204 - 0.196 0.085 HCM Control Delay (s) 8.6 - 27.2 10.6 HCM Lane LOS - A - D B		t					***************************************		7 - 5 - 11	E DE	N. A.		
HCM Control Delay (s) 8.6 - 27.2 10.6 HCM Lane LOS A - D B			•										
HCM Lane LOS A - D B			-			7.							
DATE OF THE PROPERTY OF THE PR			7	11.5		- 5							
HCM 95th %tile Q(veh) 0.8 - 0.7 0.3			Ē	1.7									
	HCM 95th %tile Q(veh)		+		0.8		0.7	0.3					

Intersection		- 13	3 523	1000	· Porto	8, P9 8		Top I	JOE .	3.89		378	18	- Line	72 m
Int Delay, s/veh	2.4														
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	11 13	e declar	42.15
Lane Configurations		1		٦	1					۲		7			
Traffic Vol, veh/h	0	208	293	161	696	0	0	0	0	37	0	57			
Future Vol, veh/h	0	208	293	161	696	0	0	0	0	37	0	57			
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0			
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop			
RT Channelized	-		Yield			None	-	-	None		-	Yield			
Storage Length	-	-	-	0	-	-	0.	(+)	-	0		135			
Veh in Median Storage	,# -	0	-		0	*	-	16974	-		0				
Grade, %	-	0	-		0	*	03#3	0	_	3 🕳	0	#:			
Peak Hour Factor	93	93	93	93	93	93	93	93	93	93	93	93			
Heavy Vehicles, %	2	2	2	4	2	2	2	2	2	6	2	6			
Mvmt Flow	0	224	315	173	748	0	0	0	0	40	0	61			
Major/Minor	Major1	23 17	in the	Major2	1250	J. 300	12000			Minor2	(67		127.10		11000
Conflicting Flow All	-	0	0	224	0	0				1206		748			
Stage 1	-	-	-	267	_	-				1094		140			
Stage 2						-				112					
Critical Hdwy				4.16						6.69		6.29			
Critical Hdwy Stg 1				-						5.49		0.20			
Critical Hdwy Stg 2										5.89		- 2			
Follow-up Hdwy			-	2.238		_				3.557	_	3.357			
Pot Cap-1 Maneuver	0			1330		0				184	0	403			
Stage 1	0		-	-		0				312	0	-			
Stage 2	0					0				890	0				
Platoon blocked, %					-					000					
Mov Cap-1 Maneuver			-	1330						160	0	403			
Mov Cap-2 Maneuver	-	·								160	0				
Stage 1	-									271	0				
Stage 2	3.00	i#R	*	::=::	:=					890	0				
				14/5						0.0				L. H	
Approach	EB		7.24	WB	200	177	1-1-3		3 3 1	SB	STOWN.	PER N	-		90.50
HCM Control Delay, s HCM LOS	0			1.5						23.1 C					
Minor Lane/Major Mvm	t	EBT	EBR	WBL	WBT :	SBLn1	SBLn2	1 100	F0.5=10	200	255	9181111	5350		
Capacity (veh/h)		-	-	1330		160	403		77.7	× 1			-		
HCM Lane V/C Ratio				0.13			0.152								
			-												
HCM Lane V/C Ratio HCM Control Delay (s) HCM Lane LOS HCM 95th %tile Q(veh)			(6)	0.13 8.1 A 0.4		0.249 34.8 D 0.9	0.152 15.5 C 0.5								

Intersection	10	12851	10-50	19.8	0.00	56 3	137	Be Japan		TE GE	200	The section	
Int Delay, s/veh	2.4												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	ATTENDED TO STATE
Lane Configurations	ሻ			ሻ	1	7ºF		4		ħ		7	
Traffic Vol, veh/h	34	365	1	40	445	15	23	0	15	21	1	28	
Future Vol, veh/h	34	365	1	40	445	15	23	0	15	21	1	28	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop	
RT Channelized			None		-	None	-	-	None			None	
Storage Length	290	;. ;		230	0,€	300	110	100		0	-	0	
Veh in Median Storage,	# -	0		-	0			0	-	-	0		
Grade, %		0		*	0			0	-		0	*	
Peak Hour Factor	91	91	91	91	91	91	91	91	91	91	91	91	
Heavy Vehicles, %	2	4	2	2	4	13	2	2	7	5	100	2	
Mvmt Flow	37	401	1	44	489	16	25	0	16	23	1	31	
Major/Minor M	ajor1	(K)SI2		Major2			Minor1	I. Paul		Minor2	0		marin mark the and
Conflicting Flow All	505	0	0	402	0	0	1077	1069	402	1061	1053	489	
Stage 1	-		į	-102			476	476	-102	577	577	-	
Stage 2	-				-		601	593	_	484	476	_	
Critical Hdwy	4.12			4.12			7.12	6.52	6.27	7.15	7.5	6.22	
Critical Hdwy Stg 1	-			-			6.12	5.52	0.2.	6.15	6.5	-	
Critical Hdwy Stg 2	-						6.12	5.52	_	6.15	6.5		
	2.218	-		2.218			3.518	4.018	3.363	3.545	4.9	3.318	
	1060	-	Τ,	1157			197	221	638	199	154	579	
Stage 1	-			-	, - .	-	570	557	-	497	374	-	
Stage 2	-			-		_	487	493	_		423		
Platoon blocked, %		(*C											
	1060			1157			175	205	638	183	143	579	
Mov Cap-2 Maneuver	-		*	-			175	205	-	183	143		
Stage 1				-		-	550	538	-	480	360		
Stage 2	*	(-)				-	442	474	:=	525	408	-	
Approach	EB			WB		SULT	NB		SINON	SB		0.0.740	
HCM Control Delay, s	0.7			0.7			22.7			18.4	CONTRACTOR OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON AND A		
HCM LOS	0.7			0.7			C			C			
Minor Lane/Major Mvmt		NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBI n2	DU	1000	
Capacity (veh/h)		245	1060	-		1157		WDIT	4	579			
HCM Lane V/C Ratio			0.035			0.038			0.126				
HCM Control Delay (s)		22.7	8.5	A 462		8.2			27.5	11.6			
I LOW OUTLING DOING (5)		Cala. I	0.0			0.2			61.0	11.0			
HCM Lane LOS		С	Α	-		Α			D	В			

Intersection	01.81	2100	4	A 154	-07	ivi si	ā,	- A		808				1500
Int Delay, s/veh	2													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR		
Lane Configurations	٦	4		ň	^	7		4		ሻ		7		
Traffic Vol, veh/h	27	478	2	24	424	22	23	0	16	17	3	28		
Future Vol, veh/h	27	478	2	24	424	22	23	0	16	17	3	28		
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0		
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop		
RT Channelized	-	-	None			None		1 -	None			None		
Storage Length	290	i n		230	, =	300			*	0	-	0		
Veh in Median Storage	,# -	0			0	(6		0			0			
Grade, %	-	0		:=:	0) 	0		-	0	:(⊕)		
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92		
Heavy Vehicles, %	2	2	2	2	2	5	2	2	2	2	2	11		
Mvmt Flow	29	520	2	26	461	24	25	0	17	18	3	30		
Major/Minor N	/lajor1	1000		Major2	Q2.1 x 1	500	Minor1	17		Minor2			To Provide a se	72
Conflicting Flow All	485	0	0	522	0	0	1121	1116	521	1101	1093	461		
Stage 1	-	Ĭ.		-	-		579	579	-	513	513	-		
Stage 2		-					542	537		588	580			
Critical Hdwy	4.12			4.12		1 /-	7.12	6.52	6.22	7.12	6.52	6,31		
Critical Hdwy Stg 1	-		-	-		-	6.12	5.52	-	6.12	5.52	0.01		
Critical Hdwy Stg 2	W.						6.12	5.52		6.12	5.52			
Follow-up Hdwy	2.218			2.218			3.518	4.018	3.318	3.518	4.018	3.399		
Pot Cap-1 Maneuver	1078			1044			183	208	555	189	214	582		
Stage 1	-			-			501	501	-	544	536	-		
Stage 2				-			525	523		495	500			
Platoon blocked, %					-	200		0.10						
Mov Cap-1 Maneuver	1078		1	1044			165	197	555	176	203	582		
Mov Cap-2 Maneuver	_			-		200	165	197	-	176	203			
Stage 1				-			487	487			523			
Stage 2	-					(*)	482	510		467	487	O₩:		
Approach	EB		A de	WB	SEL	100	NB			SB		of Street		XIII O
HCM Control Delay, s	0.4		- N	0.4			24			17.7				
HCM LOS							С			С				
Minor Lane/Major Mvm	1	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2)Dibio	130 m J 20	8120
Capacity (veh/h)		232	1078			1044	1		176	582	117			
HCM Lane V/C Ratio			0.027	-		0.025			0.105					
HCM Control Delay (s)		24	8.4		-	8.5			27.8	11.5				
HCM Lane LOS		C	Α			A			D	В				
HCM 95th %tile Q(veh)		0.7	0.1	-	5.	0.1			0.3	0.2				

APPENDIX E EXISTING SIGNAL TIMINGS


Phase [1.1.1]
---------	--------

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Walk		7		7.		7		7								
Ped Clearance		13	Į	16		13		16								
Min Green	5	15		8	-5	15		8	5	5	- 5	5	5	5	5	5
Passage	3	3		3	3	3		3	1	1	1	-1	-1	1	Ŧ	-1
Max1	20	40		30	20	40		30	25	25	25	25	25	2.5	25	2:
Max2	20	40		30	20	40		30	50	50	50	50	50	50	50	50
Yellow	4.8	4.8		4.8	4.8	4.8		3,4	3,5	3,5	3,5	3,5	3,5	3.5	3.5	3.
Red	2	2	2	2	2	2	2	2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.
Red Revert																
Added Initial																
Max Initial																
Time Before Reduce					7			1								
Cars Before Reduce			(E													
Time To Reduce																
Reduce By																
Min Gap																
Dynamic Max Limit																
Dynamic Max Step																
Auto Exit		ON				ON										
Rest In Walk									1							

Phase Option [1.1.2]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Enable	ON	ON		ON	ON	ON		ON								
Auto Entry				ON				ON								
Non Act1																
Non Act2								1								
Lock Call		ON				ON		1	ON	ON	ON	ON	ON	ON.	ON	ON
Min Recall		ON				ON										
Max Recall								i –								
Ped Recall																
Soft Recall																
Dual Entry		ON		ON		ON		ON								
Sim Gap Enable	ON	ON				ON			ON	ON	ON	ON	ON	ON	ON	ON
Guar Passage																
Cond Service																
Add Init Calc																











Alternate Phase Program 1, Interval Times [1.1.6.1]



Alternate Phase Program 2, Interval Times [1.1.6.1]



Brevard County Timing Sheet 11/6/2018 1:20:37 PM

Station: 155 - SR 46 & Holder Rd./Pine Ave. (Standard File)

Unit Parameters [1.2.1]

StartUp Flash	Auto Ped Clear	Backup Time	Red Revert	Console Timeout	Tone Disable	Feature Profile	Phase Mode	Diamond Mode	SDLC Retry Time	TS2 Det Faults	Cycle Fault Action		Max Cycle Time	Max Seek Track Time	Max Seek Dwell Time	Enable Rur	Local Flash Start	Free Ring Sequence Omit Yellow Enable Yellow 3 Second Disable Disable Init Ped Start Red Time
	OFF		3	25	OFF	1	STD8	4PH		OFF	1	ALARM		1		ON	OFF	OFFOFFOFF 1

Comm, General Comm Parameters [6.1]

Station ID	Master Station ID	Fallback time	Allow Pencil	Port	System-Up	Sys-Down	PC/Print	Aux 232
155		900	OFF					

Port Parameters [6.2]

Comm	Mode	Baud	MsgTime	Duplex	Enable	DialTime	Modem	ModemTime	Tel#1	Tel#2
System Up(P-A)										
System Down(P-B)										
PC/Print(P-2)										

Overlap General Parameters [1.5.1]

Conflict Lock	Lock Inhibit	Program Card	Use Parent	Canadian Fast Flash
OFF	OFF	OFF	OFF	OFF

Overlap Program Parameters [1.5.2.1]

Overlap	Inclu	ded Phases	 	Modifer Ph	ases	Type	Green	Yellow	Red
Overlap l						NORMAL		3.5	1.5
Overlap 2						NORMAL		3.5	1.5
Overlap 3						NORMAL		3.5	1.5
Overlap 4						NORMAL		3.5	1.5
Overlap 5						NORMAL		3.5	1,5
Overlap 6						NORMAL		3.5	1,5
Overlap 7						NORMAL		3.5	1.5
Overlap 8						NORMAL		3.5	1.5

Overlap Conflict Parameters+ [1.5.2.2]

Overlap	Co	nflicting P	Phases		Conf	flicting	g Over	rlaps			Conflic	ting Pe	eds	
Overlap I										- 1				OFFOFI
Overlap 2														OFFOFE
Overlap 3														OFFOFI
Overlap 4														OFFOFE
Overlap 5									Ų.					OFFOFE
Overlap 6														OFFOFI
Overlap 7														OFFOFE
Overlap 8														OFFOFF

Detector, Vehicle Parameters 1-16 [5.1]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Call Phase	1	2	2	4	-5	6	6	8								
Switch Phase																
Delay Time	5			7	5			7								

Detector, Vehicle Parameters 17-32 [5.1]

	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Call Phase																
Switch Phase																
Delay Time																

Detector Alternate Program 1, Vehicle Parameters [5.5.1]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Call Phase																
Switch Phase																
Delay Time																

Channels/SDLC, Assign to Phases [1.3.1]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
PH/OLP#	1	2	3	4	5	6	7	8	1	2	3	4	2	4	6	8	_1_	3	5	7				
Type	VEH	OLP	OLP	OLP	OLP	PED	VEH	VEH	VEH	VEF														
Flash	RED	YEL	RED	RED	RED	YEL	RED	RED	RED	RED	RED	RED	DRK											
Flash 1-2 Hertz						n ü				Ü														
Dimming Green																								
Dimming Yellow																								
Dimming Red																								$\overline{}$
Alt Cvc	+	+	+	1 +	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+

Channel/SDLC, Parameters [1.3.3]

TOD Dim Enable	Extra Maps Enable	D Connector Enable	Single BIU Map	IO Mode	Preempt or Ext Output
OFF	DEFAULT	TX2 V14	ON	AUTO	EXT

Channel/SDLC, MMU Map [1.3.5]

MMU-to-Controller Channel Map

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

Channel/SDLC, Permissive [1,3,4]

Channel	16	15	14	13	12	- 11	10	9	8	7	6	5	4	3	2
1		1									1	1			
2		1		1							1	1			
3	1								1	1					,
4	1		İ						1	1					
5				1									F.1.		
6		1		1											
7			1												
8	1		I												
9									*						
10															
II							*								
12						*									
13		1													
14	1			57											
15			ć.												

Channel/SDLC, Permissive [1.3.7]

DLC Device	Term/	Fac							Detect	or							MMU	Diag
BIU#	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8]	_
Present	ON	ON						Ņ.	ON	ON							ON	
Peer to Peer																		

Ring Sequence [1.2.4]

Ring	P1	P2	P3	P4	P5	P6	P7	P8
Ring 1	1	2	3	4				
Ring 2	5	6	7	8				
Ring 3								
Ring 4								

Alarme	Fnahla	Fuente	11	6	11

Alarms, Enable Ev Event#	Event Enable	Alarms,
1	ON	
2	ON	
3	ON	
4	ON	
5	ON	
6	ON	
7	ON	-
8 9	ON	ł
10	ON	1
11	ON	ł
12	ON	
13	- Mr.	
14		1
15	ON	
16	ON	
17		
18		
19		
20	ON	
21	ON	
22		
23		
24		-
25		-
26 27		-
28	ON	-
29	ON	-
30		
31	ON	
32	9.0	
33		
34		
35	ON	
36		
37		
38		
39		
40		
41	ON	
42		
43		
44		
45		-
46		
47 48		
49	ON	
50	ON	
51	ON	
52	ON	
53	ON	
54	ON	
55	ON	
56	ON	
57	ON	
58	ON	
59		
60		
61		
62		
63		
64		

	0	- 11		** * **
A	arms	-hable	Alarms	1164

Alarm#	Alarm Enable
1	ON
2	ON
3	ON
4	ON
5	ON
6	ON
7	ON
8	ON
9	
10	ON
11	1
12	1
13 14	4
15	-
16	ON
17	UN
18	
19	
20	1
21	
22 23	1
23	1
25	
26	
27	- I
28	
29	-
30	
31	
32	
33	1
34	
35	ON
36	98
37	
38	
39	
40	1
41	
42	1
43	
44	1
45	1
46	
47	
48	
49	ON
50	ON
51	ON
52	ON
53	ON
54	ON
55	ON
56	ON
57	ON
58	ON
59	Oly Oly
60	1
61	1
62	
63	
64	-

Enable Alarms [1.6.4] Preemption Times[3.1]/Phases[3.2]/Options[3.3]

Channel	1	2	3	4	5	6
Lock Input	ON	ON	ON	ON	ON	ON
Override Flash	ON	ON	ON	ON	ON	ON
Override Higher	ON	ON	ON	ON	ON	ON
Flash Dwell	ON	ON	ON	ON	ON	ON
Link						
Delay	_					
Min Duration						
Min Green						
Min Walk						
Ped Clear						
Track Green						
Min Dwell						
Max Presence						
Track R1						
Track R2						
Track R3						
Track R4						
Dwell PI						
Dwell P2		_			_	
Dwell P3						
Dwell P4						
Dwell P5						
Dwell P6	_					
Dwell P7						
Dyvell P8						
Dwell P9						
Dwell Pt0					 	
Dwell P11						
Dwell P12		-			1	
Dwell Ped1	_	-			_	
Dwell Ped2	_	-				
Dwell Ped3					_	
Dwell Ped4		_			_	
Dwell Ped5	_	_				
Dwell Ped6						
Dwell Ped7					_	_
Dwell Ped8	_					
Exit R1					_	
Exit R2	_					
Exit R3			_	-	_	
	_					
Exit R4						

Alarms, Parameters [1.4.1]

Auto Flash Parameter

ato i lasii i aic	arrio coi		
Yellow	Red	Mode	Source
35	15	VOT MON	TEST B

Alarms, Parameters [1.6.7]


Preempt Event Enabled	Pattern Event Enabled
OFF	ON

Alarms, Phases/Overlaps [1.4.2]

Therritory Thousand City	CIDS LILLIE	4										
Auto Flash	1	2	3	4	5	6	7	8	9	10	11	12
Phases												
Overlans												

Preemption Times+[3.4]/Overlaps+[3.5]/Options+[3.6]

Preempt	1	2	3	4	5	6
Enable						
Туре	EMERG	EMERG	EMERG	EMERG	EMERG	EMERG
Skip Track						
Volt Mon Flash						
Coord in Preempt						
Max2						
Return Max/Min	MAX	MAX	MAX	MAX	MAX	MAX
Extend Dwell					100000	
Pattern						
Output Mode	TS2	TS2	TS2	TS2	TS2	TS2
Track Over 1						
Track Over 2	1					
Track Over 3						
Track Over 4						
Track Over 5						
Track Over 6						
Track Over 7						
Track Over 8						
Track Over 9						
Track Over 10						
Track Over 11						
Track Over 12						
Dwell Over I						
Dwell Over 2						
Dwell Over 3						
Dwell Over 4						
Dwell Over 5						
Dwell Over 6						
Dwell Over 7						
Dwell Over 8	1					-
Dwell Over 9						
Dwell Over 10						
Dwell Over 11	1					
Dwell Over 12						
Ped Clear						
Yellow						
Red	1				-	
Return Min/Max					-	
Delay Inh						
Exit Time						
All Red B4	1					

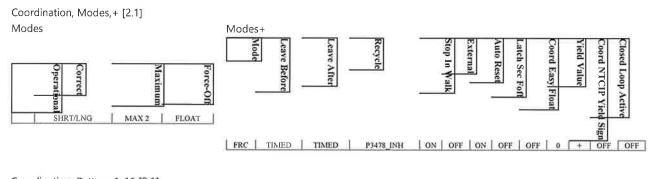

Coordination, Pattern 1-16 [2.1]

Pattern	1	2	3	4	5	6	7	8	9	10	-11	12	13	14	15	16
Cycle Time	70	70	80													
Offset Time																
Split Number	1	2	3	4	5	6	7	8								
Seg Number	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	I
Offset	beggrn	beggm	beggrn	beggm	beggrn	beggm	beggrn	beggm	beggm	beggrn	beggrn	beggrn	beggm	beggin	beggrn	beggm

Pattern	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Cycle Time	1															
Offset Time																
Split Number																
Seq Number	1	1	1	1	1	-1	1	- 1	1	1	1	-1	1	1	1	1
Offset	beggrn	beggrn	beggrn	beggrn	beggm	beggrn	beggrn	beggrn	beggm	beggrn	beggm	beggrn	beggm	beggen	beggm	beggr

Coordination, S Split Table 1	1	2	3	4	- 5	6	7	8	9	10	- 11	12	13	14	15	16
Time	10	37		23	10	37		23								
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph		ON					1									
Split Table 2	1	2	3	23	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	10 NON	MAX	NON	NON	10 NON	37 MAX	NON	23 NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph	1.011	ON	11011	Non	NON	(VIII)	HOIT	Non	Non	NON	HOM	HON	Non	HON	HON	HOI
Split Table 3	10	2	3	4	5 10	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	47 MAX	NON	23 NON	NON	MAX	NON	23 NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph	14014	ON	NON	NON	NON	IVIAA	NON	INOIN	NON	NON	NON	NON	NON	NON	NON	NON
Split Table 4	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph																
Split Table 5	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time													2.5		1	1
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph																
6 P. T. 11 C							-			10			10			
Split Table 6	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph	HON	non	HON	Non	Hon	11011	NOIT	NON	NON	NON	NON	NON	NON	NOI	NON	NON
							#									
Split Table 7	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph	1 140014	11011	HON	NON	NON	14014	14014	NON	NON	NON	NON	NON	NON	NON	INOIN	INOIN
							1									
		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
														14	15	16
Split Table 8 Time Mode	I	2 NON	3 NON	4 NON	5 NON	6 NON	7 NON	8 NON	9 NON	10 NON	11 NON	12 NON	13 NON	14 NON	15 NON	
Split Table 8 Time																
Split Table 8 Time Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Split Table 8 Time Mode Coord-Ph																
Split Table 8 Time Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON 12	NON	NON	NON	NON
Split Table 8 Time Mode Coord-Ph Split Table 9 Time	NON 1	NON 2	NON 3	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10	NON 11	NON	NON 13	NON 14	NON 15	NON
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph	NON 1	NON 2	NON 3	NON 4 NON	NON 5	NON 6	NON 7 NON	NON 8	NON 9	NON 10 NON	NON 11 NON	NON 12 NON	NON 13	NON 14 NON	NON 15	NON
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10	NON 1	NON 2	NON 3	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10	NON 11	NON 12	NON 13	NON 14	NON 15	NON
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time	NON I	NON 2	NON 3 NON	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10 NON	NON 11	NON 12 NON 12	NON 13 NON 13	NON 14 NON	NON 15	NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10	NON 1	NON 2	NON 3	NON 4 NON	NON 5	NON 6	NON 7 NON	NON 8	NON 9	NON 10 NON	NON 11 NON	NON 12 NON	NON 13	NON 14 NON	NON 15	NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph	NON I	NON 2	NON 3 NON	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10 NON	NON 11	NON 12 NON 12	NON 13 NON 13	NON 14 NON	NON 15	NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 10 Split Table 10 Split Table 10 Split Table 10 Split Table 11	NON I	NON 2	NON 3 NON	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10 NON	NON 11	NON 12 NON 12	NON 13 NON 13	NON 14 NON	NON 15	NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph	NON I NON NON 1	NON 2 NON 2 NON 2	NON 3 NON NON	NON 4 NON 4 NON	NON 5 NON 5 NON	NON 6 NON 6 NON	NON 7 NON 7	NON 8 NON 8 NON	NON 9 NON 9 NON	NON 10 NON 10	NON 11 NON 11 NON	NON 12 NON 12 NON 12	13 NON 13 NON	NON 14 NON 14	15 NON 15 NON 15	16 NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode	NON 1 NON NON	NON 2 NON 2 NON	NON 3 NON NON	NON 4 NON	NON 5 NON NON	NON 6 NON	NON 7 NON	NON 8 NON	NON 9 NON	NON 10 NON NON	NON 11 NON	NON 12 NON 12 NON	NON 13 NON 13 NON	NON 14 NON	NON 15 NON 15	16 NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time	NON I NON NON 1	NON 2 NON 2 NON 2	NON 3 NON NON	NON 4 NON 4 NON	NON 5 NON 5 NON	NON 6 NON 6 NON	NON 7 NON 7	NON 8 NON 8 NON	NON 9 NON 9 NON	NON 10 NON 10	NON 11 NON 11 NON	NON 12 NON 12 NON 12	13 NON 13 NON	NON 14 NON 14	15 NON 15 NON 15	16 NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Coord-Ph	NON I NON NON 1	NON 2 NON 2 NON 2	NON 3 NON NON	NON 4 NON 4 NON	NON 5 NON 5 NON	NON 6 NON 6 NON	NON 7 NON 7	NON 8 NON 8 NON	NON 9 NON 9 NON	NON 10 NON 10	NON 11 NON 11 NON	NON 12 NON 12 NON 12	13 NON 13 NON	NON 14 NON 14	15 NON 15 NON 15	16 NON 16 NON 16
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Split Table 12 Time	NON 1 NON 1 NON 1 NON	NON 2 NON 2 NON 2 NON 2 NON	NON 3 NON NON 3 NON 3 NON	NON 4 NON 4 NON 4 NON	NON 5 NON NON 5 NON 5 NON	NON 6 NON 6 NON 6	NON 7 NON 7 NON 7 NON 7	NON 8 NON 8 NON	NON 9 NON 9 NON NON	10 NON 10 NON NON	NON 11 NON 11 NON	12 10 11 10 11 11 11 11 11 11 11 11 11 11	13 100 13 100 13 100 100 100 100 100 100	14 NON 14 NON 14	15 NON 15 NON 15 NON	16 NON 16 NON NON
Split Table 8 Time Mode Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph	NON 1 NON 1 NON 1 NON	NON 2 NON 2 NON 2 NON	NON 3 NON NON NON	NON 4 NON 4 NON	NON 5 NON 5 NON NON	NON 6 NON 6 NON	NON 7 NON 7 NON 7 NON	NON 8 NON 8 NON	NON 9 NON 9 NON NON	10 NON 10 NON NON	NON 11 NON 11 NON	12 10 11 10 11 11 11 11 11 11 11 11 11 11	13 100 13 100 13 100 100 100 100 100 100	14 NON 14 NON 14	15 NON 15 NON 15 NON	16 NON 16 NON NON

Station: 155 Split Table 13	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	ЙОЙ	NON	NON	NON
plit Table 14	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NO
Coord-Ph																
plit Table 15	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NO
	-															
plit Table 16 Time	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NO
Coord-Ph														V		
plit Table 17	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NOI
Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NOW	NON	NON	NON	NON	NON	NON	NO
plit Table 18		2	3	4	5	6	7	8	9	10	11	12	13	14	15	17
Time			3	-	3	0		0	,	10	- 11	12	13	14	15	16
Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NO:
plit Table 19 Time	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NOI
Coord-Ph	1															
plit Table 20	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time	NON	MOM	MOM	NON	NON	MON	MOM	WOW	wow	MOM						
Mode Coord-Ph	NON	ИОИ	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NO
iplit Table 21	1	2	3	4	5	6	7	8	9	10	- 11	12	12	14	15	16
Time											11		13	14	15	16
Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NOI
Time	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NO
Coord-Ph																
												12	13	14	15	16
plit Table 23	1	2	3	4	5	6	7	8	9	10	11	3.44	NON	170.	270124	NO
Time													NON			
et was	NON NON	NON	3 NON	4 NON	5 NON	6 NON	7 NON	8 NON	9 NON	NON	NON NON	NON		NON	NON	
Time Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	13			
Mode Coord-Ph Split Table 24 Time	NON 1	NON 2	NON 3	NON 4	NON 5	NON 6	NON 7	NON 8					13	14	15	
Time Mode Coord-Ph	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	13 NON			16
Time Mode Coord-Ph Split Table 24 Time Mode	NON 1	NON 2 NON	NON 3	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON	NON 11	NON		14	15	16
Time Mode Coord-Ph Split Table 24 Time Mode Coord-Ph	NON 1	NON 2	NON 3	NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON	NON 11	NON		14	15	16 NOI
Time Mode Coord-Ph split Table 24 Time Mode Coord-Ph split Table 25 Time Mode	NON 1	NON 2 NON	NON 3 NON	NON 4	NON 5	NON 6	NON 7	NON 8	9 NON	NON 10 NON	NON 11 NON	NON 12 NON	NON	14 NON	15 NON	16 NON
Time Mode Coord-Ph Split Table 24 Time Mode Coord-Ph Split Table 25 Time	NON 1	NON 2	NON 3	NON 4 NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10	NON 11	NON 12 NON	NON	14 NON	15 NON	16 NOI
Time Mode Coord-Ph Split Table 24 Time Mode Coord-Ph Split Table 25 Time Mode Coord-Ph	NON 1	NON 2	NON 3	NON 4 NON 4	NON 5	NON 6	NON 7	NON 8	NON 9	NON 10	NON 11	NON 12 NON	NON	14 NON	15 NON	16 NO
Time Mode Coord-Ph Split Table 24 Time Mode Coord-Ph Split Table 25 Time Mode Coord-Ph Split Table 26 Time	NON 1 NON 1	NON 2 NON 2	NON 3 NON 3 NON	NON 4 NON 4 NON	NON 5 NON 5	NON 6 NON 6 NON	NON 7 NON 7 NON	NON 8 NON 8 NON	NON 9 NON 9 NON	10 NON 10 NON 10	NON 11 NON 11 NON	12 NON 12 NON	NON 13 NON	14 NON 14 NON	15 NON 15 NON	16 NOI
Time Mode Coord-Ph plit Table 24 Time Mode Coord-Ph plit Table 25 Time Mode Coord-Ph plit Table 25 Time Mode Coord-Ph	NON 1 NON 1 NON	NON 2 NON	NON 3 NON	NON 4 NON NON	NON 5 NON NON	NON 6 NON	NON 7 NON NON	NON 8 NON NON	NON 9 NON NON	NON 10 NON NON	NON 11 NON NON	NON 12 NON 12 NON	NON 13 NON	14 NON 14	15 NON 15	16 NOI
Time Mode Coord-Ph plit Table 24 Time Mode Coord-Ph plit Table 25 Time Mode Coord-Ph plit Table 26 Time Mode Coord-Ph	NON 1 NON 1 NON 1 NON	NON 2 NON NON 2 NON	NON 3 NON 3 NON	NON 4 NON 4 NON	5 NON 5 NON 5 NON	NON 6 NON 6 NON	NON 7 NON 7 NON NON	NON 8 NON 8 NON	NON 9 NON 9 NON	10 NON 10 NON 10 NON	NON 11 NON 11 NON	NON 12 NON 12 NON 12 NON	13 NON 13 NON	14 NON 14 NON	15 NON 15 NON	16 NOI
Time Mode Coord-Ph Phit Table 24 Time Mode Coord-Ph Phit Table 25 Time Mode Coord-Ph Phit Table 26 Time Mode	NON 1 NON 1	NON 2 NON 2	NON 3 NON 3 NON	NON 4 NON 4 NON	NON 5 NON 5	NON 6 NON 6 NON	NON 7 NON 7 NON	NON 8 NON 8 NON	NON 9 NON 9 NON	10 NON 10 NON 10	NON 11 NON 11 NON	12 NON 12 NON	NON 13 NON	14 NON 14 NON	15 NON 15 NON	16 NOI

Split Table 28	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph																
Split Table 29		2	3	4	1 5	6	7	8	9	10	11	12	13	14	15	16
Time			3	4	3	0			9	10	11	12	13	14	15	16
Mode	NON	MON	NON	NON	NION	NON	NON	MON	NOV	NOV	27027	NON	21027	VION	27027	27027
	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph		J														
Split Table 30	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph																
										***************************************			-			
Split Table 31	1_	2	3	4	5	6	7	- 8	9	10	11	12	13	14	15	16
Time																
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph																
			-		-				-	-	-		-			-
Split Table 32	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON	NON
Coord-Ph																

TB Coor, Advanced Scheduler [4.3]

Month								_	_	_	_	_	_	Da		cv	Una	T.	_	1	Da		63	A.		_	_	_	_	ī.	_	_	_	_	_		_	_	-	,		-	_				-	_	_	13	-	ř.
1 1 1 1 1 1 1 1 1 1	Plan	I	F	M	LA	м	L	1	A	S	0	N	D	S	M	T	w	T	E	S	1	2	3	4	15	16	17	8	10	0	Ti	2	3	4	5	6	71	8			īT	21	3	4	5	16	7	T &	To		11	Day Plan
1		Ť	1	1	1	T	1	ī	1	1	1	1	1	-	1	i	ï	i	1	3	î	1	Ť	1	f	1	Ιŕ	1	fí	Ť	Î	î	7	7	1	1	1	1	í	1	i	î	1	1	1	1	1	1	f	1	i	
1	2																Ť	Ė	Ť																																	
Second Day Plan (Ads) Seco	3			T	T																																				T											1
Corp. Day Plan 14.4 Corp. Day Plan 14.4 Corp. Day Plan 14.6 Corp. Day Plan 14.4 Corp. Day Plan 14.6 Corp. Day Plan 14		L	_	1	-	_	\vdash		_			1				_																					_			4	4					L				L		
7 1 1 1 1 1 1 1 1 1	$\overline{}$	H	⊢	₩	₩	H	H	Н	-	-	-	-	-	-	-	U	-	-	-	-	_	-	H	H	⊢	-	-	H	⊢	-	\vdash	Н	-	Н	-	-		-	\dashv	-	-	-	-	-	-	\vdash	⊢	H	╁	⊢	⊢	
S		\vdash	\vdash	H	╁	-	\vdash	-	-		-	-	-	-	-		-	-	-	-	_	-	H	\vdash	⊢	╁	H	Н	⊢	⊬	-	Н	-	Н	-	-	-	-	-	-	-	-	-	-	-	⊢	⊢	H	╁	⊢	⊢	
9 1 1 1 1 1 1 1 1 1		Н	-	╁	+	H	Н	Н			_		Н	\neg	-			-		\neg	_	-	-	\vdash	╁	╁	-	Н	\vdash	1	\vdash		-	Н		\rightarrow	-	Н	-	-	-	-	Н	-		+	╁	╁	+	\vdash	1	
11 1 1 1 1 1 1 1 1 1	9			Ī	T											П									1	T			T	İ								T				T				\vdash			T	\vdash		1
12																																																				
13		L	L	1	1	_		Ш							_	Щ	Щ		Ц						1_	1				1										_	4						_	L	\perp	\vdash	_	
14		\vdash	\vdash	-	-			-	Н			Н	Н	\dashv		4	Н	\Box	Н	-			H	\vdash	1	⊢	-	H	⊢	H	\vdash	Н	-	Н	ш		-1	4	-	4	-	-	Н	_	-	-	╀	-	₽	₽	⊢	
15		\vdash	Н	H	\vdash	-	Н		-		-			\neg		-	Н	-	_	-	_		-	\vdash	⊢	┝	H	H	\vdash	⊢	⊢	Н	-	Н	Н	\vdash	-	Н	\dashv	\dashv	+	-	-	-	Н	\vdash	⊢	H	╁	\vdash	⊢	
16		Н	Н	t	†	Н	Н							\neg	\neg									\vdash	1	†		Н	\vdash	H	\vdash		0						\exists	\neg	7				Н	+	H		+	Н	Н	
18																			П					T	T	T	Т	Г	\top	ı	Т		П	П		\Box		П	T	\neg	7				Г	T	T		T	\vdash	T	
19			L																																																	1
20		L	-	-	╄	_	L		_			_		_	_	4	_	_		_				┡	-	L		L	-	-							_		_	_	4										1	
21		H	-	-	+	H	\vdash	Н		H	Н	-	Н	-	-		Н	-	H	-	-	-	-	\vdash	-	-	-	H	+	-	-	H	-		-	-	-	\dashv	-	-	+	-	-	-		\vdash	-	+	+	\vdash	-	
22		-	-	+	+	-	\vdash	Н	-		H	-	Н	\dashv	-	- 12	Н	-	H	-	-	-	-	+	-	+	-	-	\vdash	1	H		-	\vdash	-	\dashv	-	-	\dashv	+	+	-	-	-	-	H	+	1	+	+	+	
23				1	1		H															-		H	1	1	1	-	+	t	\vdash					\vdash	1		\exists	+	+	-			1	H	t	1	$^{+}$	+	1	
24				1										T	T								Г			T		П			Т									T	1	_				T	T		1	T		
26	24																																																			
27				1	1																			L	1	1	L		1											1	1						L		F	L		
28		H	-	+	+			Н	-			Н	Н	-	-	4			Н	=	_			\vdash	├-	⊢	\vdash	H	\vdash	⊢	-			Н	_	Н	-1	4	\dashv	\dashv	-	-	_		-	H	-	-	-	\vdash	1	
29		H	Н	H	+	Н	\vdash		-		-	Н	Н	-	-	-	-	-	-	-	-		H	Н	⊢	┝	H	Н	⊢	⊬	⊢	Н	-	Н	-	\vdash	-	-	\dashv	-	+	-	-	-	H	\vdash	\vdash	H	╀	H	⊢	
30		Н	H	t	+	-	Н			Н				\neg	-					\exists		1	Н	\vdash	1	+		Н	+	+	\vdash			Н	-	\vdash	-	۲	\exists	-	+		-		Н	Н	H	H	+	+	Н	
B Coor, Day Plan [4,4]		П		T	\top	Г	П		П	П				\neg									Г	Т	T	T	Г	Г	Т	T	Т					\Box		П	T	T	7		Τ	Ξ	Г	Т	T	T	T	Т	T	
B Coor, Day Plan [4,4] Day Plan Table 1				Г	П																							Е																								1
Day Plan Table 1	.32		L	L	_		L		_																	L			L	L	_					\sqcup									L	上	_		L	L	L	1
Minute Action 10 1 2 3 10	TB Co	lan	Ta	ble	/ P	lar	Ľ			I								1					6			7			8			9			10			11			12			13	3	L	1.	4	Τ	1	5	16
Day Plan Table 2 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16						_	+	_	_	+	6	_	-	10	-	_	15	+	_	9	4	_	_	_	_		_	_		_	_		_	_	_	-	_	_	_	_		_	_			+	_		4			
Day Plan Table 2		_					+	16)	╁	1	_	-	2.	-		3	+		0	+	_	_	-	_	_	\dashv	-	_	_	-	_	-		_	-	_	_	-	_	_	-	H	_	_	H	_	-	+	_	_	-
Hour									_	-	_		-		-		_	-			-			_				_								-				_			-						-			
Hour	Day P	an	Тя	hle	. 2		Γ	1	-	Т	2		Г	3	Т		4	Т		5	Т	_	6			7			8			9			10	П	_	11	_		12		Г	13		Т	1,	4	Т	1	5	16
Minute Action 10 2 10	1						+			+					_		Ė	+	_	_	+	_	Ť	_	_		\dashv		Ť			<u></u>			10	7			\exists	_	-	_	-	-		+	_	÷	+	ŕ		10
Day Plan Table 3																		T			⇉																												\top			
Hour Minute		F	Acti	on	_			10)		2		_	10				1			_	_						_					J.)			_													1			
Hour Minute							-			_			_												_			_																								
Minute Action A	Day P				3	_	_	1		1	2			3	4		4	1	_	5_	4		6	_		7	_		8			9			10			11			12			13	_		14	4		1	5	16
Action Day Plan Table 4 1					_	_	+	_	_	+	_	_	-	-	-	_	_	+	-	_	-			-		_	-	_	_	_	_						_		-		_	_		_	_	+		_	+	_		
Day Plan Table 4							+						1					+			+			\neg	_	-	\dashv									1						-	-		-	+			+			
Hour																																																				
Minute Action Day Plan Table 5 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 Hour Action Action Action But a contract the contrac	Day P	an	Та	ble	4		Γ	1		I	2			3			4	1		5			6			7			8			9			10			11			12			13	3	ľ	1	4	1	1	5_	16
Action Day Plan Table 5 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 Hour Minute Action Day Plan Table 6 Hour Minute			Ηοι	ur			I											T																												I			T			
Day Plan Table 5					_		-								4			-			4						_									_										1			1			
Hour Minute Action		P	cti	on	-		1	_		Į.	_		1		_1	-		1	_				_	_		_		_	_	_	_	_	-		_	_1	_	_	_1		_					Į.			.1.		_	
Minute Action Day Plan Table 6 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 Hour Minute	Day P				5		Ţ	1			2			3	1		4	T		5	I		6			7	⊐		8			9			10	I		11	⊐		12			13		Τ	1	4	T	1	5	16
Action Day Plan Table 6 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 Hour Houte Houte House Hous					_	_	+	_	_	-	_	_	-		4	_	_	+	_	_	4	_	_	_	_	_	4	_			_	_			_	_	_	_	-	_	_	_	_	_		+	_	_	+	_	_	
Day Plan Table 6 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 Hour Minute					-	_	+	_	+	1	_	_	-		+	-	_	+	_	_	+	_	_	-	_	_	-		_	_		_	-		_	+	_	_	-		_	-	-	_	_	+	_	_	+	_	_	_
Hour		-	CCI	Ju	_								_					-				_		_	_								-			_			_1			_	-			-			-			
Hour	Day Pl	an	Та	ble	6		Γ	1		Т	2			3	Т		4	T		5	Т		6			7			8			9			10	Т		ΪÎ	1		12			13		T	14	4	Т	ī	5	16
Minute										1	Ī				_			1																				_			_					t			+	İ		
Action		N	/lint	ute			I														1																												I			
		À	ctio	on						L	_	_		_				1			_1															_1			_										1			1

Day Plan Table 7	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Hour																
Minute																
Action																
Day Plan Table 8	1	2	3	1 4	5	6	7	8	9	10	11	12	13	14	15	16
Hour	1			<u> </u>	-	<u> </u>				10		12	10	17	13	10
Minute	1			-						_						_
Action	1															-
		-									-					
Day Plan Table 9	1	2	3	1 4	5	6	7	8	9	10	11	12	13	14	15	16
Hour	1					Ť				- AV			- 10	1.4	15	10
Minute	1						_			_						
Action	1									_						_
by a company party of a					-		-									1 22
Day Plan Table 10 Hour Minute	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Hour	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Hour Minute Action Day Plan Table 11	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
Hour Minute Action Day Plan Table 11 Hour	1															
Hour Minute Action Day Plan Table 11 Hour Minute	1															
Hour Minute Action Day Plan Table 11 Hour	1															
Hour Minute Action Day Plan Table 11 Hour Minute	1															16
Hour Minute Action Day Plan Table 11 Hour Minute Action	1															16
Hour Minute Action Day Plan Table 11 Hour Minute		2	3	4	5	6	7	8	9	10	11	12	13	14	15	
Hour Minute Action Day Plan Table 11 Hour Minute Action Day Plan Table 12		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

TB Coor, Action Table [4.5]


Action	Action Table Pattern	Aux 1	Aux 2	Aux 3	Special 1	Special 2	Special 3	Special 4	Special 5	Special 6	Special 7	Special
1												
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	- 8											
9	255											
10	254									-		
II												
12						-						
13												
14					1							_
1.5												
16	1											_
17												
17												
10												-
19												
20												
21		Y - X										
22												
23												
24												1
25												
26							ľ					
27												
28												
29												
30												
31												
32												
33												
34			_									
35			_					-				
36												
37												
38												
39												
40												
41												
42												
43												
44												
45												
46												
47									i i			
48												
49												
50												
51												
52												
53												
33												
54												
-55												
56												
57									- 3			
58												
59												
60												
61												
62												
63												
64												
99												
77				1	1.							


Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Walk																
Ped Clearance																
Min Green		14			10	14		10	3		3		3		3	
Passage		3.5			3.5	4.5		3.5								
Max1		45			15	45		20		i –						
Max2		45			25	45		40		1						
Yellow		4.8			4.8	4.8		4.3	3.5	3.5	3.5	3.5	3.5	3,5	3.5	3.5
Red		2			2	2		2	1.5	1.5	1.5	1.5	1.5	1,5	1.5	1.5
Red Revert													-			
Added Initial																_
Max Initial																_
Time Before Reduce																
Cars Before Reduce																
Time To Reduce																
Reduce By																
Min Gap																
Dynamic Max Limit																-
Dynamic Max Step																
Auto Exit		ON				ON										
Rest In Walk																


Phase Option [1.1.2]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Enable		ON			ON	ON		ON								
Auto Entry				ON				ON								
Non Act1																
Non Act2																
Lock Call									ON	ON	ON	ON	ON	ON	ON	ON
Min Recall		ON				ON										
Max Recall																
Ped Recall																
Soft Recall																
Dual Entry		ON				ON										
Sim Gap Enable		ON				ON				ON		ON		ON		ON
Guar Passage																
Cond Service																
Add Init Calc																











Alternate Phase Program 1, Interval Times [1.1.6.1]



Alternate Phase Program 2, Interval Times [1.1.6.1]



Brevard County

Timing Sheet

10/25/2018 10:29:41 AM

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)

Unit Parameters [1,2.1]

StartUp Flash	Auto Ped Clear	Backup Time	Red Revert	Console Timeout	Tone Disable	Feature Profile	Phase Mode	Diamond Mode	SDLC Retry Time	TS2 Det Faults	Cycle Fault Action	Max Cycle Time	Max Seek Track Time	Max Seek Dwell Time	Enable Run	Local Flash Stard	Free Ring Sequence Omit Yellow Enable Yellow 3 Second Disable Disable Init Ped Start Red Time
	OFF			30	OFF		STD8	4PH		OFF	ALARM	1			ON	OFF	OFFOFFOFF

Comm, General Comm Parameters [6.1]

Station ID	Master Station ID	Fallback time	Allow Pencil	Port	System-Up	Sys-Down	PC/Print	Aux 232
334		900	OFF					

Port Parameters [6.2]

Comm	Mode	Baud	MsgTime	Duplex	Enable	DialTime	Modem	ModemTime	Tel#1	Tel#2
ystem Up(P-A)										
ystem Down(P-B)										
PC/Print(P-2)										

Overlap General Parameters [1.5.1]

Conflict Lock	Lock Inhibit	Program Card	Use Parent	Canadian Fast Flash
OFF	OFF	OFF	ON	OFF

Overlap Program Parameters [1.5.2.1]

Overlap	Included Phase	s	Modifer Pha	ses	Type	Green	Yellow	Red
Overlap 1					NORMAL		3.5	1.5
Overlap 2					NORMAL		3.5	1.5
Overlap 3					NORMAL		3.5	1,5
Overlap 4					NORMAL		3.5	1,5
Overlap 5					NORMAL		3.5	1.5
Overlap 6					NORMAL		3.5	1,5
Overlap 7					NORMAL		3.5	1.5
Overlap 8					NORMAL.		3.5	1.5

Overlap Conflict Parameters+ [1.5.2.2]

Overlap	Conflicting Phases	Conflicting Overlaps	Conflicting Peds	
Overlap 1				OFFIOFF
Overlap 2				OFFOFF
Overlap 3				OFFOFF
Overlap 4				OFFOFF
Overlap 5				OFFOFF
Overlap 6				OFFOFF
Overlap 7				OFFOFF
Overlap 8				OFFOFF

Detector, Vehicle Parameters 1-16 [5.1]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Call Phase	2	2	5	6	6			8								
Switch Phase																
Delay Time			3.													

Detector, Vehicle Parameters 17-32 [5.1]

	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Call Phase																
Switch Phase												-				
Delay Time																

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)

Detector Alternate Program 1, Vehicle Parameters [5.5.1]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Call Phase																1
Switch Phase																
Delay Time																

Channels/SDLC, Assign to Phases [1.3.1]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
PH/OLP #	1	2	3	4	5	6	7	8	1	2	3	4	2	4	6	8	1	3	5	7				
Туре	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH	OLP	OLP	OLP	OLP	PED	PED	PED	PED	PED	PED	PED	PED	VEH	VEH	VEH	VEH
Flash	RED	YEL	RED.	RED	RED	YEL	RED	RED	RED	RED	RED	RED	DRK	DRK	DRK	DRK	DRK	DRK	DRK	DRK	DRK	DRK	DRK	DRK
Flash 1-2 Hertz											T													
Dimming Green																								
Dimming Yellow																								
Dimming Red																								
Alt Cyc	+	+	+	+	+	+	+	1 +	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+

Channel/SDLC, Parameters [1.3.3]

TOD Dim Enable	Extra Maps Enable	D Connector Enable	Single BIU Map	IO Mode	Preempt or Ext Output
OFF	DEFAULT	D COMMENTO Editor	ON ON	AUTO	EXT

Channel/SDLC, MMU Map [1.3.5]
MMU-to-Controller Channel Map

- :																
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
I	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

Channel/SDIC Permissive [1 3.4]

Channel	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2
I															
2											1	1		*	
3															h
4														90	
5															
6															
7															
8															
9									•						
10															
11							*								
12						*.									
13															
14															

Channel/SDLC, Permissive [1.3.7]

SDLC Device	Term/	Fac							Detect	or							MMU	Diag
BIU#	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8		
Present	ON	ON							ON								ON	
Peer to Peer																		

Rina Sequence [1.2.4]

Ring	P1	P2	P3	P4	P5	P6	P7	P8
Ring 1		2	3	4				
Ring 2	5	6	7	8				
Ring 3								
Ring 4								

 $\textbf{Station:}\ 334$ - SR 46 & SR 9/I-95 NB Ramp (Standard File)

ON ON

ON ON ON ON

ON

ON

ON

ON ON

ON ON

ON

ON

Alarms, Enable Ev	ents [1.6.1]
Event#	Event Enable

Alarm#	Alarm Enable
1	ON
2	ON
3	ON
4	ON
5	ON
6	ON
7	ON
8	ON
9	
10	ON
11	
12	
13	
14	
15	
16	ON
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	ON
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	ON
50	ON
51	ON
52	ON
53	ON
54	ON
55	ON
56	ON
57	ON
58	
	ON
59	
60	
61	
62	
63	

Preemption Times[3.1]/Phases[3.2]/Options[3.3]

Channel	1	2	3	4	5	6
Lock Input	ON	ON	ON	ON	ON	ON
Override Flash	ON	ON	ON	ON	ON	ON
Override Higher	ON	ON	ON	ON	ON	ON
Flash Dwell						
Link						
Delay						
Min Duration						
Min Green						
Min Walk						
Ped Clear						
Track Green						
Min Dwell						
Max Presence						
Track R1						
Track R2						
Track R3						
Track R4						
Dwell Pl						
Dwell P2						
Dwell P3						
Dwell P4						
Dwell P5						
Dwell P6						
Dwell P7						
Dwell P8						
Dwell P9						
Dwell P10						
Dwell P11						1
Dwell P12						
Dwell Ped1						
Dwell Ped2						
Dwell Ped3						
Dwell Ped4						
Dwell Ped5						
Dwell Ped6						
Dwell Ped7						
Dwell Ped8						
Exit R1						
Exit R2						
Exit R3						
Exit R4						

Alarms, Parameters [1.4.1]

Auto Flash Parameter

Yellow	Red	Mode	Source
45	30	VOT MON	TEST B

Alarms, Parameters [1.6.7]

Preempt Event Enabled	Pattern Event Enabled
ON	ON


Alarms, Phases/Overlaps [1.4.2]

Auto Flash	1	2	3	4	5	6	7	8	9	10	11	12
Phases	2	6										
Overlaps												

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)

Preemption Times+[3.4]/Overlaps+[3.5]/Options+[3.6]

Preempt	1	2	3	4	5	6
Enable						
Type	EMERG	EMERG	EMERG	EMERG	EMERG	EMERG
Skip Track						
Volt Mon Flash						
Coord in Preempt	ON					
Max2						
Return Max/Min	MAX	MAX	MAX	MAX	MAX	MAX
Extend Dwell		71111111				
Pattern						
Output Mode	TS2	TS2	TS2	TS2	TS2	TS2
Track Over 1						
Track Over 2						
Track Over 3						
Track Over 4						
Track Over 5						
Track Over 6						
Track Over 7						
Track Over 8						
Track Over 9						
Track Over 10						
Track Over 11						
Track Over 12						
Dwell Over 1						
Dwell Over 2						
Dwell Over 3						
Dwell Over 4						
Dwell Over 5						
Dwell Over 6						
Dwell Over 7						
Dwell Over 8						
Dwell Over 9						
Dwell Over 10						
Dwell Over 11						
Dwell Over 12						
Ped Clear						
Yellow						
Red						
Return Min/Max						
Delay Inh					-	
Exit Time						
All Red B4						

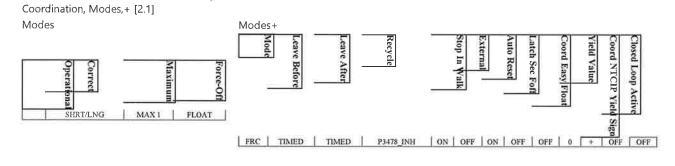

Pattern	1	2	3	4	5	6	7	8	9	10	- 11	12	13	14	15	16
Cycle Time			_		Ť	Ť				10		12	13		15	10
Offset Time																
Split Number	1	2	3	4	5	6	7	- 8	9	10	11	12	13	14	15	16
Seq Number	1	1	1	1	1	1	1	1	1	1	1	1	- 1	1	1	1
Offset	endgrn	endgrn	endgrn	endgrn	endgrn	endgrn	endgm	endgrn	endgrn	endgrn	endgrn	endgrn	endgrn	endern	endern	endgrn

Pattern	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Cycle Time																
Offset Time																
Split Number	17	18	19	20	21	22	23	24								
Seq Number	1	I I	1	1	1	I	1	1	1	1	1	1	1	1	1	1.
Offset	endgrn	endgrn	endgrn	endgrn	endgrn	endgrn	endgm	endgrn	endern	endgrn	endgrn	endgrn	endgm	endgrn	endgrn	endgri

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)

Coordination,	Splits 12.7	7.11														
Split Table 1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NICONI	MAY	NIONE	NON	NON	MAN	NON	NON	(C) PT	00.00	- CO. #77	63.17	03.00	03.00		-
Coord-Ph	NON	ON	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coola-Lit		1 00					1		1							
Split Table 2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON														
Split Table 3	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON					l									
Split Table 4	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																1
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	ОМТ	OMT	OMT
Coord-Ph		ON														
Split Table 5	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time															1.0	10
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	ONIT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON											(1=)			
Split Table 6		2	3	4	5	6	7	8	9	10	11	- 12	12		1.5	1.16
Time		-	J	-	3	0	/		9	10	11	12	13	14	15	16
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON														
Split Table 7		2	3							10						1 1/
Time	1	-	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON											- JANA		- Unit	
C_U. T_11_ 0		1 3	1 3		-		-									
Split Table 8 Time	1	2	3	4	5	6	7									
Mode								8	9	10	11	12	13	14	15	16
	NON	MAX	NON		NON	MAX										
Coord-Ph	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph	NON		NON		NON	MAX										
Coord-Ph Split Table 9	NON 1		NON 3		NON 5	MAX 6										
Coord-Ph Split Table 9 Time	1	ON 2	3	NON 4	5	6	NON 7	NON 8	OMT 9	OMT 10	OMT	OMT	OMT	OMT 14	OMT 15	OMT
Coord-Ph Split Table 9		ON		NON			NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph Split Table 9 Time Mode Coord-Ph	1 NON	2 MAX ON	3 NON	NON 4	5 NON	6 MAX	NON 7 NON	NON 8	9 OMT	OMT 10 OMT	OMT 11 OMT	OMT 12 OMT	OMT 13 OMT	OMT 14 OMT	OMT 15	OMT 16
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10	1	ON 2 MAX	3	NON 4	5	6	NON 7	NON 8	OMT 9	OMT 10	OMT	OMT	OMT	OMT 14	OMT 15	OMT
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time	NON	ON 2 MAX ON 2	3 NON	NON 4	5 NON	6 MAX	NON 7	NON 8 NON	OMT 9 OMT	10 OMT	OMT OMT	OMT 12	OMT 13	OMT 14 OMT	15 OMT	16 OMT
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10	1 NON	2 MAX ON	3 NON	NON 4	5 NON	6 MAX	NON 7 NON	NON 8	9 OMT	OMT 10 OMT	OMT 11 OMT	OMT 12	OMT 13	OMT 14 OMT	OMT 15	OMT 16
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph	NON NON	ON 2 MAX ON 2 MAX ON	NON 3	NON 4 NON	5 NON	6 MAX	NON 7 NON NON	NON 8 NON NON	OMT 9 OMT OMT	10 OMT 10 OMT	OMT OMT OMT OMT	OMT 12 OMT 12 OMT	OMT 13 OMT OMT	OMT 14 OMT 14 OMT	0MT 15 0MT 15 0MT	OMT 16 OMT 16 OMT
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11	NON	MAX ON	3 NON	NON 4	5 NON	6 MAX	NON 7	NON 8 NON	OMT 9 OMT	10 OMT	OMT OMT	OMT 12	OMT 13	OMT 14 OMT	15 OMT	16 OMT
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode	NON NON	ON 2 MAX ON 2 MAX ON	NON 3	NON 4 NON 4 NON	5 NON 5 NON 5	6 MAX	NON 7 NON 7 NON	NON 8 NON NON 8	OMT 9 OMT OMT	10 OMT OMT 10	OMT 11 OMT 11 OMT	OMT 12 OMT 12 OMT	OMT 13 OMT 13	OMT 14 OMT OMT	15 OMT 15 OMT	OMT 16 OMT 16
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time	1 NON 1	ON 2 MAX ON 2 MAX ON 2 MAX ON	NON 3	NON 4 NON	5 NON	6 MAX	NON 7 NON NON	NON 8 NON NON	OMT 9 OMT OMT	10 OMT 10 OMT	OMT OMT OMT OMT	OMT 12 OMT 12 OMT	OMT 13 OMT OMT	OMT 14 OMT 14 OMT	0MT 15 0MT 15 0MT	OMT 16 OMT 16 OMT
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph	1 NON 1 NON	ON 2 MAX ON 2 MAX ON 2 MAX ON	3 NON 3 NON	NON 4 NON 4 NON	5 NON S NON NON	6 MAX 6 MAX	NON 7 NON 7 NON NON	NON 8 NON NON 8 NON	OMT 9 OMT OMT 9 OMT	10 OMT 10 OMT 10 OMT	OMT OMT OMT OMT OMT OMT	0MT 12 0MT 12 0MT 0MT	0MT 13 0MT 0MT 13 0MT	OMT 14 OMT OMT 14 OMT	0MT 15 0MT 15 0MT	16
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph Split Table 11 Split Table 11 Split Table 11 Split Table 11 Split Table 11	1 NON 1	ON 2 MAX ON 2 MAX ON 2 MAX ON	NON 3	NON 4 NON 4 NON	5 NON 5 NON 5	6 MAX	NON 7 NON 7 NON	NON 8 NON NON 8	OMT 9 OMT OMT	10 OMT OMT 10	OMT 11 OMT 11 OMT	OMT 12 OMT 12 OMT	OMT 13 OMT 13	OMT 14 OMT OMT	15 OMT 15 OMT	OMT 16 OMT 16
Coord-Ph Split Table 9 Time Mode Coord-Ph Split Table 10 Time Mode Coord-Ph Split Table 11 Time Mode Coord-Ph	1 NON 1 NON	ON 2 MAX ON 2 MAX ON 2 MAX ON	3 NON 3 NON	NON 4 NON 4 NON	5 NON S NON NON	6 MAX 6 MAX	NON 7 NON 7 NON NON	NON 8 NON NON 8 NON	OMT 9 OMT OMT 9 OMT	10 OMT 10 OMT 10 OMT	OMT OMT OMT OMT OMT OMT	0MT 12 0MT 12 0MT 0MT	0MT 13 0MT 0MT 13 0MT	OMT 14 OMT OMT 14 OMT	0MT 15 0MT 15 0MT	16 16 OMT 16 OMT

Station: 334 Split Table 13	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM
Coord-Ph		ON											- N. 11. 1	200.0.4		
plit Table 14		2	3	1 4	5	6	7	8	9	10	11	12	13	1.1	15	16
Time														14	15	
Mode Coord-Ph	NON	MAX ON	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM
plit Table 15	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM
Coord-Ph		QN					1									
plit Table 16	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMIT	OMT	OMT	OMT	OMT	OMT	OMT	OM
Coord-Ph		ON		1.011			11011			UMI	Oldi	OMI	OMI	0.11	O.H.	Oir
Warakla 17			1 1				T -		I 6			- 75	- 15			- 17
plit Table 17 Time	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mode Coord-Ph	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM
							1		4							
plit Table 18 Time	1	2	3	4	5	6	7	8	9	10	Ш	12	13	14	15	16
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	ОМТ	OMT	OM
Coord-Ph		ON														
plit Table 19	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	
Coord-Ph	NON	ON	NON	NON	NON	IVIAA	NON	NON	OWIT	OMI	OMI	OMI	OMI	OWIT	OMI	OM
· · · · · ·																
plit Table 20	1	2	3	4	5	6	7	8	9	10	-11	12	13	14	15	16
Mode Coord-Ph	NON	MAX ON	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM'
Coold-I II	-	ON				-										
plit Table 21	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM
Coord-Ph		ON														
plit Table 22	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time										1						
Mode Coord-Ph	NON	MAX ON	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
plit Table 23 Time	1	2	3	4	5	6	. 7	8	9	10	11	12	13	14	15	16
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OM
											_					
Coord-Ph	1	ON														16
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
Coord-Ph plit Table 24 Time		2												14 OMT	15 OMT	OM
Coord-Ph	1 NON		3 NON	4 NON	5 NON	6 MAX	7 NON	8 NON	9 OMT	10 OMT	OMT	OMT	13 OMT	14 OMT	OMT	OM
Coord-Ph Plit Table 24 Time Mode Coord-Ph	NON	MAX ON	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	ОМТ	OMT	OMT	OMT	
Coord-Ph Plit Table 24 Time Mode Coord-Ph		2 MAX														
Coord-Ph plit Table 24 Time Mode Coord-Ph	NON	MAX ON 2	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	ОМТ	OMT	OMT	OMT	16
Coord-Ph Plit Table 24 Time Mode Coord-Ph Plit Table 25 Time Mode	NON 1	MAX ON 2	NON 3	NON 4	NON 5	MAX 6	NON 7	NON 8	OMT 9	OMT	OMT	OMT 12	OMT	OMT	OMT 15	16
Coord-Ph Plit Table 24 Time Mode Coord-Ph Plit Table 25 Time Mode Coord-Ph Plit Table 25 Time Mode Coord-Ph	NON 1	MAX ON 2	NON 3	NON 4	NON 5	MAX 6	NON 7	NON 8	OMT 9	OMT	OMT	OMT 12	OMT	OMT	OMT 15	16
Coord-Ph Plit Table 24 Time Mode Coord-Ph Plit Table 25 Time Mode Coord-Ph	NON 1	2 MAX ON 2 MAX ON	NON 3 NON	NON 4	NON 5	6 MAX	NON 7 NON	NON 8	9 OMT	OMT 10 OMT	OMT 11 OMT	OMT 12 OMT	OMT 13	OMT 14	OMT 15	16 OMT
Coord-Ph Plit Table 24 Time Mode Coord-Ph Plit Table 25 Time Mode Coord-Ph Plit Table 26 Time	NON 1	MAX ON 2 MAX ON 2 MAX ON 2	NON 3 NON	NON 4 NON	NON 5	6 MAX	NON 7	NON 8 NON	OMT 9 OMT	10 OMT	OMT 11	OMT 12	OMT 13	OMT 14	15 OMT	16 OMT
Coord-Ph Plit Table 24 Time Mode Coord-Ph Plit Table 25 Time Mode Coord-Ph Plit Table 26 Time Mode Coord-Ph	NON 1 NON 1 NON	MAX ON 2 MAX ON 2 MAX ON 2 MAX ON 0N	NON 3 NON	NON 4 NON NON	5 NON 5 NON	MAX 6 MAX	NON 7 NON NON	NON 8 NON	OMT 9 OMT OMT	0MT 10 0MT 10 0MT	OMT OMT OMT OMT	OMT 12 OMT 12 OMT	0MT 13 0MT 0MT	0MT 14 0MT 0MT	15 OMT 15 OMT	OM
Coord-Ph Plit Table 24 Time Mode Coord-Ph Plit Table 25 Time Mode Coord-Ph Plit Table 26 Time Mode	NON 1	MAX ON 2 MAX ON 2 MAX ON 2	NON 3 NON	NON 4 NON	NON 5	6 MAX	NON 7	NON 8 NON	OMT 9 OMT	10 OMT	OMT 11	OMT 12	OMT 13	OMT 14	15 OMT	16 OMT

Split Table 28	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ОИ														
Split Table 29	1	1 2	3	4	T 5	6	7	8	9	10	11	12	13	14	15	16
Time			_	<u> </u>	-	Ť		-		10			10		15	10
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON		107.0001				1.01					- Unit	0	- Ulika	Unit
			-								-					
Split Table 30	1	2	3	1 4	5	6	7	8	9	10	11	12	13	14	15	16
Time																
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT'	OMT	OMT	OMT
Coord-Ph		ON														
		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			-		-					-	-	-		
Split Table 31	T 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time																- 10
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	OMT	OMT	OMT
Coord-Ph		ON														
Split Table 32		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Time		-						Ť		10	1			- ^ 7		10
Mode	NON	MAX	NON	NON	NON	MAX	NON	NON	OMT	OMT	OMT	OMT	OMT	ŌMT	OMT	OMT
Coord-Ph	2,556.5.1	ON	STATE OF	0.0000000000000000000000000000000000000	32,140,030		13,3711	4.40011			O IVII	CAVII	CIVII	CIVII	CIVIT	JIVII

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)

TB Coor, Advanced Scheduler [4.3]

	N	lon	th		_	_	_		_	_	_	_		In	av	οĒ	w	ek	00		Ir	Yas	2.0	f N	1or	th					1										2		_								13	_	1
Plan	J	TE	IN	al.	AI	м	J	J	IA	Is	To	IN	D	S	Tv	ili	Tw	vIT	rTi	FIS	+	11	2 1	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8			1	2	3	4	15	16	1	1 8	1 9		Tī	Day Plan
1												i						Ti		1		i											1		1			1									1					1	1
2												1			1	T	1	1	+	1	Ť																															1	2
3												1				T	1	T	1																																	1	3
4												1			1	T	1	1	1																1																		4
5	T	Т	Т	T	T						Τ		Т	1	T	T			_	Т	T											Г														T		T		1	1		1
6		Т	Т	T	٦					1	1	Т			Т	Т	Т	1		Т	Τ																									T		Т	Т	Т	Т		1
7	Т	Т	1	7						Т	T		T	T	Т	Т	Т	Т	1		Т	Т														\neg								Г		Т		T	Т	Т	Т	Т	1
8	Τ	T	T	I	\Box					L	I	Т	T		Т	T	T	Т	Т	T	T	П									1															Т		T	T	Т	Т		1
9	L		I	1	\exists						I	I	L		L	I					I															\Box										I	I	I	T				1
10												4									Ι							\Box						-											Г	T	Т	Т	Т	Т	Т	Г	1
11												I				L					I																										I	Ι	T		L		1
12	_	\perp	1	4	_					1_	_		_	1	1_	1			_		1												_		- 2								_										1
13	L	L		_	\perp				_				1		L	L			\perp	_	1		Ц																_ [_			1	1		L	1		1_		1
14	┸	1	1	4	4	Ш		\perp	1_	1_	┸	1	1	1	1	1	1		1		1																				_	_	_		_	1		1			_	\perp	1
15	_	1	1	4	_						1	1		_	-	1			_	1	1	1	Ц													4									L	1	1	1	1	1	1	1	1
16	1	_	1	4	4			ш	_	1	1	1		1	1	Ļ	1	-	1	1	ļ	4	Ц									_				_							_		_	1	1	1	1	1	1_		1
17	1	1	1	4	4				_	-	1	1	1	1	1	1	1	1	1	1	1	-	Ц			_	_				_	_	_			Ц	_				_			_		1	1	1	1	-	1		I
18	1	1	1	4	4				_	1	1	1	1	-	1	1		-	1	1	1	4	Ц								_			Щ												1	1	1	1	1			1
19	1	4	+	4	4			Ш	-	-	1	+	1	-	-	1	1	-	-	-	1	-	4						_			_	_	_		1					_	_	Ц		1	1	+	1	1	-	-	1	1
20	-	-	1	4	4				-	-	1	1	1		-	1	1	1		-	1	-	Ц									_				_										1		1	1				1
21	-	+	+	4	4			H	-	-	1	+	-	-	1	1	+	+	-	-	1	-	4																	-					F	1	-	1	1				1
22	-	+	+	4	4	_			-	1	+	+	+	+	+	+	+	-	+	+	+	-	4		\vdash	_			-	_	_	_		_		-	4		_	-	-	_		H	-	+	+	+	+	+	-	-	1
23	1	-	1	4	4				-	1	1	1	1	1	4	+	1	4	+	1	4	4	_			L	_				_					4									-	1	_	1	4	1	-	\perp	1
24	╄	+	+	4	4			\vdash	-	-	-	1	-	-	-	1	4	+	+	-	+	-	-						_		_					-				_					-	-	1	1	1	+	1	\vdash	1_1_
25	₽	+	+	4	4	-	_	Н	-	-	+	+	+	-	+	+	+	+	+	+	+	+	-				_		_		_	_			4	-	4		_	_		_		H	┡-	+	+	+	+	+	-	⊢	1
26	╀	₽	+	4	-	_	-	H	-	+-	╄	+	₽	⊬	╬	+	+	+-	+	+	+	-	-	-	_	_	-	_	_	_	-	-	-	_	-	-	-	-	-	<u> </u>	_	-	-	H	-	+	+	+	+	₩	-	⊢	11
27	╄	1	1	4	4				_	4	1	1	1	-	1	1	1	-	4	+	1	4	4			_	_					_	_			4			_	_	_	_	_	L	ļ.,	1	_	1	1	+	1	┖	1
28	╄	₽	+	4	4	Ц	_	Н	-	-	+	+	-	-	-	┺	+	-	+	+	ļ	4	-	_		_	_	_			_	_	_	_	_	-	_	_	_	_	_	_	_	L	↓_	+	+	+	4	4-	+	-	1
29	╀	╀	+	4	4	_	_	Н	-	+	+	+	₽	+	+	+	+	-	+	+	+	-	4	_	_	_	-				-	_	_	-	-	-	-	_	-	<u></u>	_	_	_	H	-	╀	+	+	+	+	-	1	1
30	-	╀	+	4	4	_	_	ш	1	-	1	+	╄	1	+	+	1	-	-	+	+	4	_	Щ		_	_	ш			_	_	_	-		4	_	_		_		_	_	_	1	4	-	+	4	1	1	<u>. </u>	1
31	₽	+	+	4	4	_	_	Н	-	+	╀	+	₽	₩	+	+	+	-	+	+	+	-	-	-	_	_	_	_	-		-	H	Н	_	-	-	-	_	-	-	_	_	_	H	┞-	+	+	+	+	+	╀	⊢	1
TB Co						an	4			1		_	_	2		_				_		T			_		7			0			0	3		10	_		11			13			-	-				_		-	T 1/
Jay I	180	Ho		ie i	_	_	+	-	1	+	_	2	+	3		╀	4	_	⊢	5	_	Į.	_	6	-	_	7	-	_	8	-	_	9	-	_	10	-	_	11	_	_	12	н	-	1.	3	+	_	14	+	1	5	16
	-	Mir		_	_	_	+			+	_		+		-	+	-	_	⊢		-	╫	_	_	+			-	_	_	-	-		-		-	-	_		_			_	H	_	_	+	-	_	+		_	_
		Act			-	-	+	1.0	00	+	-	_	+	_	_	╁	-	-	\vdash	_	-	╁	_	_	+	_	_	\dashv	-	-	-	-	_	\neg	-	_	-	_	_	_	H		-	-	-	-	+	-	_	+	_	-	_
		Aut	LIGI					10	30				1			_			_						_																			_						_			
Day P	lan	T:	abl	le 2	2		Γ	1	ī	Т		2	Т	3		T	4		Г	5		T	-	6	Т		7	П		8			9	_		10	\neg		11		Г	12	П	Г	1.	3	Т		4	Т	1	5	16
		Ho					1			1			+			$^{-}$		_	\vdash			1			7			_			_			_	_		7			_	1		_	1	_	_	+	_		1		_	
		Mir					1			1			+			T		_	T			1			7			T						-1	_		\neg			_				t			+			+			
		Act					1	10	00				T			I						T			⇉									T										Ĺ			İ			1			1
							-		_	.,				_			_		_			_			_							_		_,			_		_		_												
ay P	ıan			e S	_	_	-		_	1	_	2	-	3		1	4		L	5		1	_	6	4	_	7	_	_	8			9		_	10			11			12		1	1.	5			14_	-	1	5	16
	-	Ho		_	_	_	+	_	_	+	_	_	-	_	_	1		_	-		_	+	_	_	-	_		-	_					-			4	_			-			-			-	_		+			-
		Mir			_	_	+	1.0	20	+	_	_	+	_	_	+	_	-	\vdash		_	+	_	_	+	_	_	-	_	_		_		-	_		-	_	_	_	_		_	-	-	_	+	_	_	+	_	_	-
		Act	tion				-	L	00	-	_	_	1			-		-	_		_	1			_	_					-			_			_		_					_		_	-	_		-			1
ay P					1		.[_	Ţ		2	Ţ	3		I	4		Г	5		I	-	6	1		7	Į		8			9			10			11			12			1.	3	Į		4	I	1	5	16
		Ho			_	_	1	_	_	-	_		-	_		1	_	_	L			+	_		4	_		_		_		_	-	_	_				_		_			-	_	_	-			1			
_		Mir				_	+		20	+	_	_	-	_	_	+	_	_	-	_	_	+	_	_	-	_	_	-1		_	_	-		-	_	_	-	_	_	_	-	_	_	-		_	-	_	_	+	_	_	-
		Act	tion				1	10	00			_	1			1		_	_			1			_	_			_					_	_		_1		_		_	_		_	_	_			_	1	_		1
ay P				e 5	5		Ţ	- 1		I	ij,	2	I	3			4			5		Ι)	6	I		7	1		8			9			10			11			12			1	3	I		4	I	1	5	16
		Ho					1		_	1			1												_			1																			1						
		Mir					1	_		1						1									1																									1			
		Act	tion		_	_	1	10	00	1		_		_	_	1	_		L	-	_																				Ĺ			1			1			1			1
ay Pi	lan	T	abl	e f	í		Γ		_	Т	_	Ž	Т	3	_	Т	4		_	5	_	Т	_	6	7		7	Т		8			9		_	10	_	_	11		_	12		_	1.	3	Т	1	14	Т	1	5	16
		Но					1			1	_	_	1	Ť	_	1	_		1		_	+	_	•	_	_	_	1		_			_	7			1				_			1	- 1	_	+	Ť	_	+			1 10
										-		_				-		_	•				_	_	-	_	_	- 1						_	_		\rightarrow	_		_	-		_	-						_			-
	1.1	Mir	nute										1			1			L						_ [1							D			II.			П			1			
		Mir Act			_	_	+	10	00	+	-	_	+	_	_	╀	_	-	H	_	_	╁	_	_	+	_	_	-						-	_		-		_	_	-	_		-	_	_	-			1	_	_	

Hour
Minute
Action

Timing Sheet

10/25/2018 10:29:41 AM

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard	File)
--	------	---

Day Plan Table 7	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Hour																
Minute																
Action	100															
Day Plan Table 8		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Hour	1		3	-	- 3	0		•	9	10	11	12	13	14	15	10
Minute	-		-			_				_						-
Action	100	_									_	-				-
Action	100		_													
Day Plan Table 9	1	2	3	4	5	6	7	8	9	10	- 11	12	13	14	15	16
Hour																
Minute																
Action	100															
Day Plan Table 10	1	2	3	4 1	5	6	7	8	9	10	11	12	13	14	15	16
Hour																
Minute																
Action	100			i i												
	11111111111111												-	-	*******	
entrope and the second and the secon																
Day Plan Table 11	1	2	3	4	_ 5	6	7	8	9	10	- 11	12	13	14	15	16
Hour																
Minute																
Action	100															

Station: 334 - SR 46 & SR 9/I-95 NB Ramp (Standard File)

TB Coor, Action Table [4.5]

Action	Action Table Pattern	Aux 1	Aux 2	Aux 3	Special 1	Special 2	Special 3	Special 4	Special 5	Special 6	Special 7	Special 8
	1					- S-						
2	2											ľ
3	3											ii
4	4											
5	5											
7	6 7											
												6
8	8											
9	9											
10	10											
ΤĪ	ΙΪ											
12	12											
-13	13											
14	14			i								
.15	15										-	1
16	16									_		
17	17							_			-	
18	18										-	
19	19											
20	20											
21	21											
22	22											-
23	23				 							-
2.4	23				-							
24	24 255											
25	255				-							
26	1											
27	2											
28	3											
29	4											
30	5											
31 32	6											
32	7											
33	8											
34	9											
35	10											
36	11											
37	12											_
38	13											
39	14		-		-							
40	15		-					_				
							-					
41	16											
42	17		-		-							
43	18											
44	19											
45	20											
46	21											
47	22											
48	23		Y									
49	24											
50	48											
51												
52												
53												
54												
55												
56					-							
57							-					
58												
59							(4)					
60												
61												
62												0
63												
64												
99												
100	254					- 0						

APPENDIX F

SIGNALIZED INTERSECTION SYNCHRO WORKSHEETS – EXISTING CONDITIONS

	۶	→	•	•	•	4	1	†	-	-	↓	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	↑			个个	7	ሻ		7	27.00		
Traffic Volume (veh/h)	38	227	0	0	300	43	200	0	122	0	0	(
Future Volume (veh/h)	38	227	0	0	300	43	200	0	122	0	0	C
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Work Zone On Approach		No			No			No				
Adj Sat Flow, veh/h/ln	1811	1870	0	0	1870	1826	1752	0	1811			
Adj Flow Rate, veh/h	42	249	0	0	330	0	220	0	0			
Peak Hour Factor	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91			
Percent Heavy Veh, %	6	2	0	0	2	5	10	0	6			
Cap, veh/h	627	1148	0	0	1498		280	0				
Arrive On Green	0.08	0.61	0.00	0.00	0.42	0.00	0.17	0.00	0.00			
Sat Flow, veh/h	1725	1870	0.00	0.00	3647	1547	1668	0.00	1535			
Grp Volume(v), veh/h	42	249	0	0	330	0	220	0	0			
Grp Sat Flow(s), veh/h/ln	1725	1870	0	0	1777	1547	1668	0	1535			
Q Serve(g_s), s	0.7	3.7	0.0	0.0	3.7	0.0		0.0				
Cycle Q Clear(g_c), s	0.7	3.7	0.0	0.0	3.7		7.9		0.0			
		3.7			3.7	0.0	7.9	0.0	0.0			
Prop In Lane	1.00	4440	0.00	0.00	4400	1.00	1.00	^	1.00			
Lane Grp Cap(c), veh/h	627	1148	0	0	1498		280	0				
V/C Ratio(X)	0.07	0.22	0.00	0.00	0.22		0.79	0.00				
Avail Cap(c_a), veh/h	988	1148	0	0	2181	1.00	890	0				
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	1.00	1.00	0.00	0.00	1.00	0.00	1.00	0.00	0.00			
Uniform Delay (d), s/veh	7.1	5.4	0.0	0.0	11.5	0.0	24.8	0.0	0.0			
Incr Delay (d2), s/veh	0.1	0.4	0.0	0.0	0.1	0.0	5.8	0.0	0.0			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	0.4	2.2	0.0	0.0	2.4	0.0	6.0	0.0	0.0			
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	7.2	5.8	0.0	0.0	11.6	0.0	30.6	0.0	0.0			
LnGrp LOS	Α	Α	Α	Α	В		С	Α				
Approach Vol, veh/h		291	- 50		330	Α		220	Α			
Approach Delay, s/veh		6.0			11.6			30.6				
Approach LOS		Α			В			С				
Timer - Assigned Phs	2017	2	5510	LIKKII)	5	6	-	8	Thirt -	EV., L	- 1,121 X	13.14
Phs Duration (G+Y+Rc), s	7.7	45.0			12.0	33.0		17.2	0.11		1 1	8 , P
Change Period (Y+Rc), s		6.8			6.8	6.8		6.8				
Max Green Setting (Gmax), s		38.2			18.2	38.2		33.2				
Max Q Clear Time (g c+l1), s		5.7			2.7	5.7		9.9				
Green Ext Time (p_c), s		1.9			0.1	2.8		0.8				
Intersection Summary	A 1708 H	THE ST		NAS ST		William II	J2 (3)		2 4 . 7	2000	I to a second	U S
HCM 6th Ctrl Delay	×		14.6			1-1-	- 37				7 7 7 7 7	
HCM 6th LOS			14.0 B									
			D									
Notes												

Unsignalized Delay for [NBR, WBR] is excluded from calculations of the approach delay and intersection delay.

	۶	→	*	•	←	4	4	†	~	1	ļ	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	75	Α.			个个	7	*5		*			
Traffic Volume (veh/h)	44	202	0	0	463	43	389	0	255	0	0	0
Future Volume (veh/h)	44	202	0	0	463	43	389	0	255	0	0	0
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Work Zone On Approach		No			No			No	.,,,,			
Adj Sat Flow, veh/h/ln	1870	1870	0	0	1870	1856	1841	0	1870			
Adj Flow Rate, veh/h	46	213	0	0	487	0	409	0	0			
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95			
Percent Heavy Veh, %	2	2	0.00	0.00	2	3	4	0.55	2			
Cap, veh/h	483	1005	0	0	1272	J	475	0				
Arrive On Green	0.08	0.54	0.00	0.00	0.36	0.00	0.27	0.00	0.00			
Sat Flow, veh/h	1781	1870	0.00	0.00	3647	1572	1753	0.00	1585			
											_	
Grp Volume(v), veh/h	46	213	0	0	487	0	409	0	0			
Grp Sat Flow(s),veh/h/ln	1781	1870	0	0	1777	1572	1753	0	1585			
Q Serve(g_s), s	1.0	4.2	0.0	0.0	7.2	0.0	15.8	0.0	0.0			
Cycle Q Clear(g_c), s	1.0	4.2	0.0	0.0	7.2	0.0	15.8	0.0	0.0			
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00			
Lane Grp Cap(c), veh/h	483	1005	0	0	1272		475	0				
V/C Ratio(X)	0.10	0.21	0.00	0.00	0.38		0.86	0.00				
Avail Cap(c_a), veh/h	790	1005	0	0	1910		819	0				
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	1.00	1.00	0.00	0.00	1.00	0.00	1.00	0.00	0.00			
Uniform Delay (d), s/veh	10.9	8.6	0.0	0.0	17.0	0.0	24.6	0.0	0.0			
Incr Delay (d2), s/veh	0.1	0.5	0.0	0.0	0.2	0.0	5.6	0.0	0.0			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	0.7	2.9	0.0	0.0	5.1	0.0	11.2	0.0	0.0			
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	11.0	9.1	0.0	0.0	17.2	0.0	30.2	0.0	0.0			
LnGrp LOS	В	A	A	A	В	0.0	C	A	0.0			
Approach Vol, veh/h		259			487	А		409	Α			
Approach Delay, s/veh		9.4			17.2	^		30.2	_ ^			
Approach LOS		9.4 A										
		А			В			С				
Timer - Assigned Phs		2	OF OFFI	W. Bland	5	6		8		CO THE S	NATE	(John)
Phs Duration (G+Y+Rc), s		45.0			12.8	32.2		26.1				
Change Period (Y+Rc), s		6.8			6.8	6.8		6.8				
Max Green Setting (Gmax), s		38.2			18.2	38.2		33.2				
Max Q Clear Time (g_c+I1), s		6.2			3.0	9.2		17.8				
Green Ext Time (p_c), s		1.5			0.1	4.2		1.5				
Intersection Summary	NEW D	ATEL 3	51100		128		EU P		16 5		Maria B	08 01
HCM 6th Ctrl Delay			20.1									
HCM 6th LOS			C									
Notes		2 -101		200								

Unsignalized Delay for [NBR, WBR] is excluded from calculations of the approach delay and intersection delay.


	۶	→	*	•	←	*	1	†	1	-	+	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	₽		Ϋ́	Դ			4			4	
Traffic Volume (veh/h)	5	315	62	36	366	10	84	2	41	14	6	23
Future Volume (veh/h)	5	315	62	36	366	10	84	2	41	14	6	23
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1841	1841	1811	1841	1841	1159	1159	1159	1870	1870	1870
Adj Flow Rate, veh/h	6	371	73	42	431	12	99	2	48	16	7	27
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Percent Heavy Veh, %	2	4	4	6	4	4	50	50	50	2	2	2
Cap, veh/h	456	719	142	456	915	25	190	13	56	137	74	169
Arrive On Green	0.01	0.48	0.48	0.04	0.51	0.51	0.19	0.19	0.19	0.19	0.19	0.19
Sat Flow, veh/h	1781	1494	294	1725	1782	50	556	68	297	372	397	902
Grp Volume(v), veh/h	6	0	444	42	0	443	149	0	0	50	0	0
Grp Sat Flow(s), veh/h/ln	1781	0	1788	1725	0	1832	921	0	0	1671	0	0
Q Serve(g_s), s	0.1	0.0	12.0	0.8	0.0	10.9	9.2	0.0	0.0	0.0	0.0	0.0
Cycle Q Clear(g_c), s	0.1	0.0	12.0	0.8	0.0	10.9	10.9	0.0	0.0	1.7	0.0	0.0
Prop In Lane	1.00		0.16	1.00		0.03	0.66		0.32	0.32		0.54
Lane Grp Cap(c), veh/h	456	0	861	456	0	941	258	0	0	380	0	0
V/C Ratio(X)	0.01	0.00	0.52	0.09	0.00	0.47	0.58	0.00	0.00	0.13	0.00	0.00
Avail Cap(c_a), veh/h	569	0	861	510	0	941	298	0	0	448	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	9.7	0.0	12.5	9.3	0.0	10.9	27.4	0.0	0.0	23.8	0.0	0.0
Incr Delay (d2), s/veh	0.0	0.0	2.2	0.1	0.0	1.7	2.1	0.0	0.0	0.2	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	7.8	0.5	0.0	7.0	4.2	0,0	0.0	1.2	0.0	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	9.7	0.0	14.7	9.4	0.0	12.6	29.5	0.0	0.0	24.0	0.0	0.0
LnGrp LOS	Α	Α	В	Α	Α	В	С	Α	Α	С	Α	Α
Approach Vol, veh/h		450			485			149			50	
Approach Delay, s/veh		14.6			12.3			29.5			24.0	
Approach LOS		В			В			С			С	
Timer - Assigned Phs	1	2	1,111	4	5	6		8	18 JUL	W 0. 200		B. 123
Phs Duration (G+Y+Rc), s	7.4	42.8		19.9	9.6	40.5		19.9				
Change Period (Y+Rc), s	6.8	6.8		6.8	6.8	6.8		6.8				
Max Green Setting (Gmax), s	5.0	28.4		16.2	5.0	28.4		16.2				
Max Q Clear Time (g_c+l1), s	2.1	12.9		12.9	2.8	14.0		3.7				
Green Ext Time (p_c), s	0.0	2.2		0.2	0.0	2.2		0.1				
Intersection Summary	11 4 4				1 FEET	A CETT	B. San		1886		10-25	3
HCM 6th Ctrl Delay		1	16.0									
HCM 6th LOS			В									

	۶	$\stackrel{\cdot}{\rightarrow}$	*	•	←	*	1	†	1	1	ļ	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	€		Ť	1→			4			4	
Traffic Volume (veh/h)	13	400	103	39	372	21	78	9	41	21	5	14
Future Volume (veh/h)	13	400	103	39	372	21	78	9	41	21	5	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	14	426	110	41	396	22	83	10	44	22	5	15
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	606	851	220	523	1078	60	171	21	56	147	43	67
Arrive On Green	0.02	0.59	0.59	0.04	0.61	0.61	0.11	0.11	0.11	0.11	0.11	0.11
Sat Flow, veh/h	1781	1434	370	1781	1755	98	864	181	494	686	373	589
Grp Volume(v), veh/h	14	0	536	41	0	418	137	0	0	42	0	0
Grp Sat Flow(s),veh/h/ln	1781	0	1804	1781	0	1853	1539	0	0	1648	0	0
Q Serve(g_s), s	0.2	0.0	13.8	0.7	0.0	9.0	5.1	0.0	0.0	0.0	0.0	0.0
Cycle Q Clear(g_c), s	0.2	0.0	13.8	0.7	0.0	9.0	6.8	0.0	0.0	1.7	0.0	0.0
Prop In Lane	1.00		0.21	1.00		0.05	0.61		0.32	0.52		0.36
Lane Grp Cap(c), veh/h	606	0	1070	523	0	1138	248	0	0	257	0	0
V/C Ratio(X)	0.02	0.00	0.50	0.08	0.00	0.37	0.55	0.00	0.00	0.16	0.00	0.00
Avail Cap(c_a), veh/h	687	0	1070	567	0	1138	378	0	0	387	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	6.5	0.0	9.4	6.8	0.0	7.7	34.3	0.0	0.0	32.1	0.0	0.0
Incr Delay (d2), s/veh	0.0	0.0	1.7	0.1	0.0	0.9	1.9	0.0	0.0	0.3	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	8.2	0.4	0.0	5.4	4.6	0.0	0.0	1.4	0.0	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	6.5	0.0	11.1	6.9	0.0	8.6	36.2	0.0	0.0	32.4	0.0	0.0
LnGrp LOS	Α	Α	В	Α	A	A	D	A	Α	С	Α	A
Approach Vol, veh/h		550			459			137			42	
Approach Delay, s/veh		11.0			8.5			36.2			32.4	
Approach LOS		В			Α			D			С	
Timer - Assigned Phs	1	2	. Y. U	4	5	6	MARK!	8	STIL	S ME.		(E524)
Phs Duration (G+Y+Rc), s	8.1	55.9		15.9	9.8	54.3		15.9				
Change Period (Y+Rc), s	6.8	6.8		6.8	6.8	6.8		6.8				
Max Green Setting (Gmax), s	5.0	38.4		16.2	5.0	38.4		16.2				
Max Q Clear Time (g_c+l1), s	2.2	11.0		8.8	2.7	15.8		3.7				
Green Ext Time (p_c), s	0.0	2.4		0.3	0.0	3.2		0.1				
Intersection Summary		0 W W	1800	W RESIDE	118 11		BOWN.	1 807	Min St.	Mary Contract		the Pari
HCM 6th Ctrl Delay			13.7									
HCM 6th LOS			В									

APPENDIX G TRAFFIC TRENDS ANALYSIS WORKSHEETS

TRAFFIC TRENDS Carpenter Rd -- Carpenter Rd from Dairy Rd to SR 46

County: Volusia
Station #: 183
Highway: Carpenter Rd

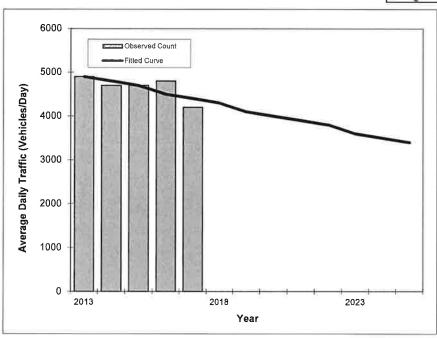


	Traffic (AD	
Year	Count*	Trend**
2013	4900	4900
2014	4700	4800
2015	4700	4700
2016	4800	4500
2017	4200	4400
l '		
201	8 Opening Yea	r Trend
2018	N/A	4300
	019 Mid-Year T	
2019	N/A	4100
	20 Design Year	
2020	N/A	4000
		0.04(35-4-35)
TRAN	PLAN Forecas	ts/Trends

*Axle-Adjusted

TRAFFIC TRENDS I-95 -- I-95 from SR 406 to SR 46

County: Station #: Highway: Brevard 70-0363 I-95

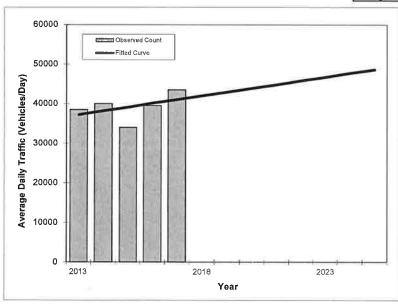


** Annual Trend Increase:	950
Trend R-squared:	19.3%
Trend Annual Historic Growth Rate:	2.55%
Trend Growth Rate (2017 to Design Year):	2,36%
Printed:	15-Oct-18
Straight Line Growth Option	() = /-,

	- 10 110	- ///
.,	Traffic (AD	
Year	Count*	Trend**
2013	38500	37200
2014	40000	38200
2015	34000	39100
2016	39500	40100
2017	43500	41000
201	8 Opening Yea	r Trend
2018	N/A	42000
2	019 Mid-Year	Frend
2019	N/A	42900
	20 Design Year	
2020	N/A	43900
TRAN	PLAN Forecas	ts/Trends

^{*}Axle-Adjusted

TRAFFIC TRENDS I-95 -- I-95 from SR 46 to Deering Pkwy

County: Station #: Highway: Brevard 70-0322 I-95

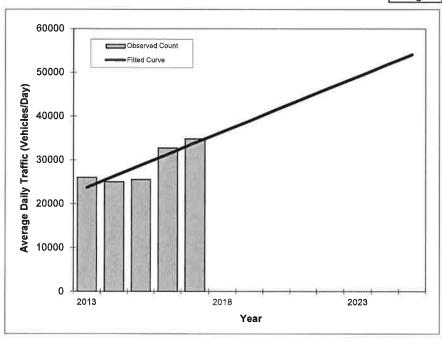

	Traffic (AD	T/AADT)
Year	Count*	Trend**
2013	26000	23700
2014	25000	26300
2015	25500	28800
2016	32700	31300
2017	34800	33900
i i		
	8 Opening Yea	
2018	N/A 019 Mid-Year T	36400
2019	N/A	38900
	20 Design Year	
2020	N/A	41500
	PLAN Forecas	ts/Trends

** Annual Trend Increase: 2,530

Trend R-squared: 75.9%

Trend Annual Historic Growth Rate: 10.76%

Trend Growth Rate (2017 to Design Year): 7.47%


Printed: 15-Oct-18

Straight Line Growth Option

*Axle-Adjusted

TRAFFIC TRENDS SR 46 -- SR 46 from Fawn Lake Blvd to I-95

County:	Volusia
Station #:	200
Highway:	SR 46

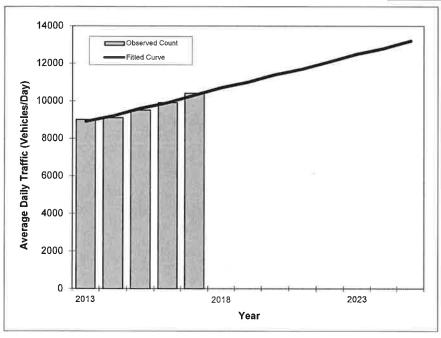


	Traffic (AD	T/AADT)
Year	Count*	Trend**
2013	9000	8900
2014	9100	9200
2015	9500	9600
2016	9900	9900
2017	10400	10300
	1	
	8 Opening Yea	
2018	N/A	10700
	019 Mid-Year	A STATE OF THE PARTY OF THE PAR
2019	N/A 20 Design Year	11000
2020	N/A	11400
United States (St. 1)	PLAN Forecas	5.500000
	- Er Will Oldeda	10/110100

** Annual Trend Increase: 360 Trend R-squared: 96.1% Trend Annual Historic Growth Rate: 3.93% Trend Growth Rate (2017 to Design Year): 3.56% Printed: 15-Oct-18 Straight Line Growth Option

*Axle-Adjusted

TRAFFIC TRENDS SR 46 -- SR 46 from I-95 to US 1

County:	Volusia
Station #:	200
Highway:	SR 46

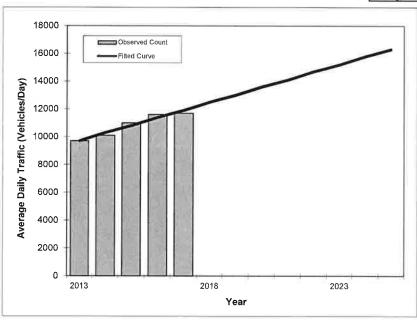

	Traffic (AD	
Year	Count*	Trend**
2013	9700	9700
2014	10100	10300
2015	11000	10800
2016	11600	11400
2017	11700	11900
201	8 Opening Yea	r Trend
2018	N/A	12500
2	019 Mid-Year T	rend
2019	N/A	13000
202	20 Design Year	Trend
2020	N/A	13600
TRAN	PLAN Forecas	ts/Trends

** Annual Trend Increase: 550 Trend R-squared: 94,9% Trend Annual Historic Growth Rate: 5,67% Trend Growth Rate (2017 to Design Year): 4,76% Printed: 15-Oct-18

*Axle-Adjusted

APPENDIX H

UNSIGNALIZED INTERSECTION SYNCHRO WORKSHEETS – BUILD-OUT CONDITIONS

Intersection	Van		71 12 1			320			MILE				E contra Ayes and a	
Int Delay, s/veh	261.6													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	El China Taylor	13
Lane Configurations	7	ĵ.		*	^	7		44		19	ĵ»			
Traffic Vol, veh/h	104	435	31	91	139	340	20	10	147	360	10	77		
Future Vol, veh/h	104	435	31	91	139	340	20	10	147	360	10	77		
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0		
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop		
RT Channelized			None		-	None		×	None		-	None		
Storage Length	0	-	-	400	-	0	-	- 4		0		14		
Veh in Median Storage	e,# -	0	12		0			0		-	0	114		
Grade, %	-	0		-	0	14		0	:=	-	0	-		
Peak Hour Factor	94	94	94	94	94	94	94	94	94	94	94	94		
Heavy Vehicles, %	2	4	15	9	3	2	2	2	3	2	2	2		
Mvmt Flow	111	463	33	97	148	362	21	11	156	383	11	82		
												17000		
Major/Minor I	Major1	W 533	-T. 76	Major2		V BITT	Minor1	March .	0.77	Minor2	W. I	1000	3530525-L. INSP	FS
Conflicting Flow All	510	0	0	496	0	0	1272	1406	480		1060	148		_
Stage 1	-	-	-	-	-		702	702	-	010	342	-		
Stage 2	-				-		570	704	_		718			
Critical Hdwy	4.12			4.19	-		7.12	6.52	6.23	7.12	6.52	6.22		
Critical Hdwy Stg 1	-1.12	*		7,10			6.12	5.52	0.20	6.12	5.52	0.22		
Critical Hdwy Stg 2		- V _					6.12	5.52		6.12	5.52			
Follow-up Hdwy	2.218	-		2.281	-		3.518	4.018	3.327	3.518	4.018	3.318		
Pot Cap-1 Maneuver	1055			1033			144	139		~ 182	224	899		
Stage 1	1000	-		1000	-		429	440	J04 -		638	099		
Stage 2							506	440			433			
Platoon blocked, %			-	-	_	-	500	440	- I	300	433	-		
Mov Cap-1 Maneuver	1055			1033			107	113	584	- 100	182	899		
		-	-		4									
Mov Cap-2 Maneuver		*		:=:	=	(6 4 0	107	113		~ 106	182	121		
Stage 1	7.0	-	-				384	394			578	(¥)		
Stage 2		×		· ·	-	25	409	399		~ 246	388	:: - :		
		11												
Approach	EB	100		WB	100	CHI I	NB	85.0		SB	ik sz	2 3		80
HCM Control Delay, s	1,6			1.4			28.5		\$	1017.1				
HCM LOS							D			F				
400 M		Name of the last												
Minor Lane/Major Mvm	t t	VBLn1	EBL	EBT	EBR	WBL	WBT			SBLn2		1986		10
Capacity (veh/h)		336	1055	*:										
HCM Lane V/C Ratio			0.105	:**	-	0.094	•		3.613					
HCM Control Delay (s)		28.5	8.8	-	-	8.8	п. ж	- (1260	11.8				
HCM Lane LOS		D	Α	: # 0	*	Α		*	F					
HCM 95th %tile Q(veh)		3.3	0.4		*	0.3		-	38.4	0.5				
Notes		35.55	1361	280		2000		i dina	W.	LUE I	, WL	W. J. W.	A DINE ME TOU	510
~: Volume exceeds cap	pacity	\$: De	elay exc	eeds 3	00s	+: Com	putatio	n Not D	efined	*: All	maiory	/olume	in platoon	
, 5,13333 Sup		,. 5,	,			. 59.11	Lamina			.,	Joi		L. 1919.	

Intersection		100		15 37		3	. 4,541	1000	127 20	33		ALAUG.	
Int Delay, s/veh	298.9												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	74.2 H
Lane Configurations	ሻ	1>		ሻ	^	7		44		ሻ	1>	y .	
Traffic Vol, veh/h	85	394	51	155	418	283	27	8	63	301	9	65	
Future Vol, veh/h	85		51	155	418	283	27	8	63	301	9	65	
Conflicting Peds, #/hr	0		0	0	0	0	0	0	0	0	0	0	
Sign Control	Free		Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop	
RT Channelized		_	None			None	-	-	None	-	-	None	
Storage Length	0	-	MATERIAL DE 2	400	- 4	0		4		0	-	_	
Veh in Median Storage	.# -	0			0			0			0	- ·	
Grade, %	_		-	3+3	0	-		0			0	_	
Peak Hour Factor	92		92	92	92	92	92	92	92	92	92	92	
Heavy Vehicles, %	2		2	2	2	2	2	2	2	2	2	2	
Mvmt Flow	92		55	168	454	308	29	9	68	327	10	71	
		120		.00	, , ,	000	20		00	021	10	7.5	
Major/Minor	Major1	19500		Major2	9,23	184.21	Minor1	, 120	1 (01)	Minor2	STS I	Po 19	JIP2
Conflicting Flow All	762	0	0	483	0	0	1625	1738	456	1468	1457	454	
Stage 1	-			-			640	640	-	790	790	-	
Stage 2	-		-	-		_	985	1098			667	-	
Critical Hdwy	4.12		-	4.12		_	7.12	6.52	6.22	7.12	6.52	6.22	
Critical Hdwy Stg 1	- 11.12		-		*		6.12	5.52	0.22	6.12	5.52	0.22	
Critical Hdwy Stg 2						_	6.12	5.52		6.12	5.52		
Follow-up Hdwy	2.218			2.218	*	_	3.518	4.018	3.318	3.518	4.018	3.318	
Pot Cap-1 Maneuver	850			1080		-	82	87		~ 106	130	606	
Stage 1	-			1000	*		464	470	-	383	402	-	
Stage 2	7		-	-	F, 12		299	289		442	457		
Platoon blocked, %					-	-	200	200		772	401		
Mov Cap-1 Maneuver	850			1080			54	66	604	~ 69	98	606	
Mov Cap-1 Maneuver	-			1000	ũ		54	66	-	~ 69	98	-	
Stage 1			-				414	419	ren.	342	339		
Stage 2				-	- 3		217	244		342	408		
Glage 2							211	244		342	400	mi.	
Approach	EB		1000	WB	NO UT		NB	5 60		SB		X Wall	
HCM Control Delay, s	1.6	100		1.6			92.5		\$	1451.9			
HCM LOS	,,,,						F		,	F			
							-		-	wer-			
Minor Lane/Major Mvn	it	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1		11-11	- 3 /-	N
Capacity (veh/h)		135	850		*				69	372			
HCM Lane V/C Ratio			0.109	-	=	0.156			4.742				
HCM Control Delay (s)		92.5	9.8		*	8.9		\$	1804.6	17.3			
HCM Lane LOS		F	Α		*	Α	(***)	×	F	C			
HCM 95th %tile Q(veh)	4.8	0.4			0.6		-	35.7	0.8			
Notes	MA S	-1943	0000	100	SPER S	Day J	i le li	T(US)	(T)_12		10.00	U PELS	
~: Volume exceeds cap		¢. D.	elay exc	oode 2	200	+: Com	nutotio.	Not D	ofined.	*. A II	major	محدياه	in nla

Intersection	u N			Ti to		10 PM	5.50		Total		CC MILE	AVE	let 102	11 71 3	# V	18
Int Delay, s/veh	4.2															
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	W			15
Lane Configurations		1		*	A					ሻ		7				
Traffic Vol, veh/h	0	436	550	248	464	0	0	0	0	40	0	197				
Future Vol, veh/h	0	436	550	248	464	0	0	0	0	40	0	197				
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop				
RT Channelized	-	-	Yield	-	nF.	None	-		None	-		Yield				
Storage Length	-	~		0	2	-	- 1	4	-	0	12	135				
Veh in Median Storage,	# -	0	-		0	-	2	16974	-		0	11.100.77				
Grade, %	-	0		- 4	0	-	- 4	0		-	0	-				
Peak Hour Factor	89	89	89	89	89	89	89	89	89	89	89	89				
Heavy Vehicles, %	2	3	5	5	2	2	2	2	2	13	2	14				
Mvmt Flow	0	490	618	279	521	0	0	0	0	45	0	221				
	1ajor1	The late		Major2		75.8	- 30	TRA I		Minor2	18	1887	n sii k	3.51V	With L	3
Conflicting Flow All		0	0	490	0	0				1324	78	521				
Stage 1	-	· 1								1079	-	-				
Stage 2	*			9	(*)	-				245		-				
Critical Hdwy		7	-	4.175	1.0					6.795		6.41				
Critical Hdwy Stg 1	(m)	-	-	*		190				5.595	5 4 5	(4)				
Critical Hdwy Stg 2										5.995		-				
Follow-up Hdwy	-		- 2	2.2475						3.6235		3.433				
Pot Cap-1 Maneuver	0			1053		0				148	0	526				
Stage 1	0				(e.	0				304	0	-				
Stage 2	0		-			0				745	0					
Platoon blocked, %					2#					140	U					
Mov Cap-1 Maneuver				1053	-	10.				109	0	526				
Mov Cap-2 Maneuver		-		1000) = 1	-				109	0	320				
Stage 1					-					223	0					
Stage 2	- 1	-				-				745		-				
Stage 2	F			- Ĩ	1(6:					745	0					
Approach	EB	10.0	9. 7.1	WB	2 11		160	U.S.	-	SB		No. 24	E F X	6 6	110:10	
HCM Control Delay, s	0		100	3.4	-	-		-11-7		23.9	-					
HCM LOS	U			5.4						C C						
Minor Lane/Major Mvmt		EBT	EBR	WBL	WBT	SBLn1	SBLn2	10 20	110	124.1	5,00	32 33	7 - 3	8 -16	Slevis	10
Capacity (veh/h)				1053		109	526									
HCM Lane V/C Ratio				0.265	-	0.412										
HCM Control Delay (s)				9.6		59.5	16.7									
HCM Lane LOS		-		A		F	C									
HCM 95th %tile Q(veh)				1.1		1.7	2.1									
TOTAL POUT TOTAL SE(VOIT)			12.0	1.1		1.7	4.1									

ntersection	All to	185	SESS S	Va il			200		110	DE V	201	21.0	Note the Sant	100
nt Delay, s/veh	5.3													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	EN YELLY S	30
ane Configurations		1		19	4					7		7		
Traffic Vol, veh/h	0	361	427	176	900	0	0	0	0	42	0	179		
Future Vol, veh/h	0	361	427	176	900	0	0	0	0	42	0	179		
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0		
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop		
RT Channelized			Yield	(*:		None			None	-		Yield		
Storage Length	-	:#c		0						0	-	135		
/eh in Median Storage,	# -	0	*		0			16974	Ų		0			
Grade, %	-	0	-	30 4 8	0	*		0	*	-	0	+:		
Peak Hour Factor	93	93	93	93	93	93	93	93	93	93	93	93		
Heavy Vehicles, %	2	2	2	4	2	2	2	2	2	6	2	6		
Mvmt Flow	0	388	459	189	968	0	0	0	0	45	0	192		
	Najor1	Septime.		Major2	DA X		KV			Minor2	N. TY			17
Conflicting Flow All		0	0	388	0	0				1540	- 27	968		
Stage 1				100	100	-				1346	-			
Stage 2		:50	=		500					194	-	-		
Critical Hdwy		-	10 9	4.16						6.69		6.29		
Critical Hdwy Stg 1				: -		*				5.49	-	-		
Critical Hdwy Stg 2	1.5		15 .			100				5.89				
Follow-up Hdwy			-	2.238	-	-				3.557		3.357		
Pot Cap-1 Maneuver	0			1156		0				113	0	300		
Stage 1	0		-	2-2		0				235	0	-		
Stage 2	0	_				0				810	0	-		
Platoon blocked, %														
Mov Cap-1 Maneuver				1156	(*)					95	0	300		
Mov Cap-2 Maneuver	200	-			: •• /	_				95	0	-		
Stage 1		-		11 14		_				197	0			
Stage 2		-		-						810	0	-		
Glago 2										010				
Approach	EB			WB		C Tolu	Q 74			SB	Date of	100		100
HCM Control Delay, s	0			1.4	M P			17.1		43.3				
HCM LOS										Е				
Minor Lane/Major Mvml	Lanta B	EBT	EBR	WBL	WBT	SBLn1	SBLn2	100		1000	The .	V 1	E " F R) 1 - 1741	100
Capacity (veh/h)				1156	-	95	300	. 10						
HCM Lane V/C Ratio				0.164		0.475								
HCM Control Delay (s)		:5/		8.7		73.3	36.2							
HCM Lane LOS			- 5	Α		73.5 F	50.2 E							
HCM 95th %tile Q(veh)		-		0.6		2	4.1							
TOTAL SOUL WITH CALACULA				0.0			4.1							

Intersection	9/0			000		16		1 m	-	1	100		104 800	
Int Delay, s/veh	3													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	THE PARTY OF	STATE OF
Lane Configurations	7	ß		٦	↑	7		4		ሻ		ř		
Traffic Vol, veh/h	42	416	6	44	503	17	29	0	16	22	1	34		
Future Vol, veh/h	42	416	6	44	503	17	29	0	16	22	1	34		
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0		
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop		
RT Channelized			None	-		None	-	V .	None		2	None		
Storage Length	290	~	-	230	-	300	-		:	0	2	0		
Veh in Median Storage	,# -	0			0	12	- 4	0	12	-	0	-		
Grade, %	(±)	0	-		0		-	0	-	120	0			
Peak Hour Factor	91	91	91	91	91	91	91	91	91	91	91	91		
Heavy Vehicles, %	2	4	2	2	4	13	2	2	7	5	100	2		
Mvmt Flow	46	457	7	48	553	19	32	0	18	24	1	37		
				INFA										
Major/Minor I	Major1	1 1/5	y Roll	Major2	.97-III	3 10	Minor1	BAND.	8 3 1 8	Minor2	meg.	The state of		3
Conflicting Flow All	572	0	0	464	0	0	1231	1221	461	1211	1205	553		
Stage 1			:				553	553		649	649			
Stage 2		*	(€	:#:	*	-	678	668	:=	562	556	3±5		
Critical Hdwy	4.12			4.12	_	-	7.12	6.52	6.27	7.15	7.5	6.22		
Critical Hdwy Stg 1	-		154-2		¥	-	6.12	5.52	37 (57) (4)	6.15	6.5			
Critical Hdwy Stg 2		-		-			6.12	5.52		6.15	6.5	-		
Follow-up Hdwy	2.218		200	2.218			3.518	4.018	3.363	3.545	4.9	3.318		
Pot Cap-1 Maneuver	1001		-	1097			154	180	590	157	121	533		
Stage 1	-	_		-			517	514	-	454	343	-		
Stage 2	-			-	100		442	456		506	384			
Platoon blocked, %					2		772	700		500	004	_		
Mov Cap-1 Maneuver	1001			1097	-	-	133	164	590	142	110	533		
Mov Cap-1 Maneuver	1001	-		1037			133	164	290	142	110	200		
Stage 1				7 - 1	-		493	490		433	328			
	-	- 1	-				392	436	•			•		
Stage 2		•	:=:	= 0	_		392	430		468	366			
Approach	EB	C 11 0		WB	J C VX	6 3 3 4	NB	1000	1200	SB		e pare	No. 2 2 2	No. of Street
HCM Control Delay, s	0.8			0.7			31.6			21.4	-			
HCM LOS	0,0			0.7			D D			C C				
Minor Lane/Major Mvm	t N	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	4 74	110	Sances.	S. Sell of
Capacity (veh/h)		184	1001	-				*	142	533	1			
ICM Lane V/C Ratio		0.269				0.044			0.17	0.07				
HCM Control Delay (s)		31.6	8.8		W .	8.4		-	35.5	12.3				
HCM Lane LOS		D	A	-		Α			55.5 E	12.3 B				
HCM 95th %tile Q(veh)		1	0.1		-	0.1			0.6	0.2				

Intersection	Name of Street	10-0						-011						Call Call	
Int Delay, s/veh	2,6														
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR			100
Lane Configurations	7	f)		7	1	75		4		ħ		7"			
Traffic Vol, veh/h	34	539	7	27	480	25	29	0	17	18	3	34			
Future Vol, veh/h	34	539	7	27	480	25	29	0	17	18	3	34			
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0			
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop			
RT Channelized	-		None			None		-	None		3,438,50	None			
Storage Length	290	-	340	230	(c#3	300	2	_	2	0		0			
Veh in Median Storage	e,# -	0	-		0	-		0			0	10 2			
Grade, %	_	0	343		0	-		0	2	-	0	-			
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92			
Heavy Vehicles, %	2	2	2	2	2	5	2	2	2	2	2	11			
Mvmt Flow	37	586	8	29	522	27	32	0	18	20	3	37			
			- 5	277.55		= = = = = = = = = = = = = = = = = = = =									
Major/Minor	Major1	15 1	1 19	Major2	10		Minor1	FIXT	1,450	Minor2	J. Tech	TA SOF	Veres S	3 - 11 3	35 F)
Conflicting Flow All	549	0	0	594	0	0	1278	1271	590	1253	1248	522			
Stage 1	-	4 2	-1		_		664	664		580	580				
Stage 2	-	(e)	(₩)	+	-		614	607	_	673	668	=			
Critical Hdwy	4.12			4.12	-		7.12	6.52	6.22	7.12	6.52	6.31			
Critical Hdwy Stg 1	-	0.00	:•)		-	; =)	6.12	5.52	500000 H	6.12	5.52				
Critical Hdwy Stg 2		-			-	-	6.12	5.52		6.12	5.52				
Follow-up Hdwy	2.218		-	2.218			3.518	4.018	3.318	3.518	4.018	3.399			
Pot Cap-1 Maneuver	1021	7.	-	982		-	143	168	508	149	173	537			
Stage 1	- 1021		_	- 002	181		450	458	-	500	500	007			
Stage 2							479	486		445	456	-			
Platoon blocked, %					-		710	400		440	450				
Mov Cap-1 Maneuver	1021			982			125	157	508	136	162	537			
Mov Cap-7 Maneuver	1021	-	-	302	-	-	125	157		136	162				
Stage 1		-							-			-			
	-			- *		-	434	442	-	482	485				
Stage 2	_	() = (1			:•:	-	430	471	-	413	440				
Approach	EB	X-210		WB	SOLUE.	J. H.	NB	UU III A	.000	SB	050	U A U	W	C 700 P.	. 1-73
HCM Control Delay, s	0.5	100		0.4			34.1	-		20.4					
HCM LOS	0.0			0.4			D D			C					
Minor Lane/Major Mvm	it i	VBLn1	EBL	EBT	EBR	WBL	WBT	WBR :	SBLn1	SBI n2	J. 10		1 20	6 15	Think.
Capacity (veh/h)		173	1021	-	-	982			136	537					
HCM Lane V/C Ratio		0.289			-	0.03				0.069					
HCM Control Delay (s)		34.1	8.7	A.F.		8.8			35.9	12.2					
HCM Lane LOS		D D	Α.	1.5		ο.ο			35.9 E	12.2 B					
		1.1	0.1	:=:			(6 4)								
HCM 95th %tile Q(veh)	1	1.1	0.1	3.00	-	0.1			0.5	0.2					

APPENDIX I

UNSIGNALIZED INTERSECTION SYNCHRO WORKSHEETS BUILD-OUT CONDITIONS - IMPROVED

	۶	→	*	•	-	4	4	†	1	1	ļ	-√
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Ϋ́	Դ		ሻ	٨	J _a r		4		7	Դ	
Traffic Volume (veh/h)	104	435	31	91	139	340	20	10	147	360	10	77
Future Volume (veh/h)	104	435	31	91	139	340	20	10	147	360	10	77
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1841	1841	1767	1856	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	111	463	33	97	148	362	21	11	156	383	11	82
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	2	4	4	9	3	2	2	2	2	2	2	2
Cap, veh/h	522	699	50	364	764	653	138	66	446	660	64	479
Arrive On Green	0.41	0.41	0.41	0.41	0.41	0.41	0.34	0.34	0.34	0.34	0.34	0.34
Sat Flow, veh/h	890	1698	121	851	1856	1585	77	195	1326	1218	191	1423
Grp Volume(v), veh/h	111	0	496	97	148	362	188	0	0	383	0	93
Grp Sat Flow(s),veh/h/ln	890	0	1819	851	1856	1585	1598	0	0	1218	0	1614
Q Serve(g_s), s	3.3	0.0	7.9	3.7	1.8	6.2	0.0	0.0	0.0	5.7	0.0	1.5
Cycle Q Clear(g_c), s	5.1	0.0	7.9	11.6	1.8	6.2	3.1	0.0	0.0	8.8	0.0	1.5
Prop In Lane	1.00		0.07	1.00		1.00	0.11		0.83	1.00		0.88
Lane Grp Cap(c), veh/h	522	0	749	364	764	653	650	0	0	660	0	543
V/C Ratio(X)	0.21	0.00	0.66	0.27	0.19	0.55	0.29	0.00	0.00	0.58	0.00	0.17
Avail Cap(c_a), veh/h	604	0	915	442	933	797	910	0	0	863	0	812
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	8.3	0.0	8.5	13.2	6.7	8.0	8.9	0.0	0.0	10.4	0.0	8.4
Incr Delay (d2), s/veh	0.2	0.0	1.3	0.4	0.1	0.7	0.2	0.0	0.0	0.8	0.0	0.1
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.7	0.0	3.3	1.0	0.7	2.2	1.5	0.0	0.0	3.6	0.0	0.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	8.5	0.0	9.8	13.6	6.8	8.8	9.1	0.0	0.0	11.2	0.0	8.5
LnGrp LOS	Α	Α	Α	В	Α	Α	Α	Α	Α	В	Α	Α
Approach Vol, veh/h		607			607			188			476	- 1
Approach Delay, s/veh		9.6			9.1			9.1			10.7	
Approach LOS		Α			Α			Α			В	
Timer - Assigned Phs		2	PETER LE	4	"Testalar	6	100	8			1 2 3	17 3
Phs Duration (G+Y+Rc), s	. 31	16.5	300	19.2	100	16.5		19.2				
Change Period (Y+Rc), s		4.5		4.5		4.5		4.5				
Max Green Setting (Gmax), s		18.0		18.0		18.0		18.0				
Max Q Clear Time (g_c+l1), s		5.1		9.9		10.8		13.6				
Green Ext Time (p_c), s		0.9		2.2		1.2		1.1				
Intersection Summary				37013		4-373	200	0.00	136.9	(= 711 T	EF 158	S. 115
HCM 6th Ctrl Delay	11/18		9.7	1 1 2 1			here.					
HCM 6th LOS			Α									

	۶	→	*	•	←	1	1	†	~	1	+	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	ĵ»		ሻ	^	74		4		Ϋ́	f}	
Traffic Volume (veh/h)	85	394	51	155	418	283	27	8	63	301	9	65
Future Volume (veh/h)	85	394	51	155	418	283	27	8	63	301	9	65
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	92	428	55	168	454	308	29	9	68	327	10	71
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	398	740	95	438	852	722	200	95	299	611	59	417
Arrive On Green	0.46	0.46	0.46	0.46	0.46	0.46	0.29	0.29	0.29	0.29	0.29	0.29
Sat Flow, veh/h	704	1624	209	912	1870	1585	246	322	1016	1322	199	1416
Grp Volume(v), veh/h	92	0	483	168	454	308	106	0	0	327	0	81
Grp Sat Flow(s),veh/h/ln	704	0	1833	912	1870	1585	1584	0	0	1322	0	1615
Q Serve(g_s), s	3.9	0.0	7.0	6.0	6.3	4.7	0.0	0.0	0.0	5.8	0.0	1.3
Cycle Q Clear(g_c), s	10.2	0.0	7.0	13.0	6.3	4.7	1.7	0.0	0.0	7.6	0.0	1.3
Prop In Lane	1.00		0.11	1.00		1.00	0.27		0.64	1.00		0.88
Lane Grp Cap(c), veh/h	398	0	835	438	852	722	594	0	0	611	0	476
V/C Ratio(X)	0.23	0.00	0.58	0.38	0.53	0.43	0.18	0.00	0.00	0.53	0.00	0.17
Avail Cap(c_a), veh/h	429	0	916	478	935	792	906	0	0	883	0	807
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	10.7	0.0	7.2	12.1	7.0	6.6	9.6	0.0	0.0	11.4	0.0	9.4
Incr Delay (d2), s/veh	0.3	0.0	0.8	0.6	0.5	0.4	0.1	0.0	0.0	0.7	0.0	0.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.7	0.0	2.5	1.5	2.3	1.4	0.9	0.0	0.0	3.4	0.0	0.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	11.0	0.0	8.0	12.6	7.6	7.0	9.7	0.0	0.0	12.2	0.0	9.6
LnGrp LOS	В	Α	Α	В	Α	Α	Α	Α	Α	В	Α	Α
Approach Vol, veh/h		575			930			106			408	
Approach Delay, s/veh		8.5			8.3			9.7			11.7	
Approach LOS		Α			Α			Α			В	
Timer - Assigned Phs	300	2	12 3/4	4	E SHATELY	6		8		FEIT - I		
Phs Duration (G+Y+Rc), s		15.1		20.9	91	15.1		20.9		7-3		
Change Period (Y+Rc), s		4.5		4.5		4.5		4.5				
Max Green Setting (Gmax), s		18.0		18.0		18.0		18.0				
Max Q Clear Time (g_c+l1), s		3.7		12.2		9.6		15.0				
Green Ext Time (p_c), s		0.4		1.7		1.1		1.4				
Intersection Summary	Tiel y	1 24 1	41.XX	775/v 17	3812		N. LEGIS	i ne		The same	100	
HCM 6th Ctrl Delay			9.1									
HCM 6th LOS			Α									

APPENDIX J

SIGNALIZED INTERSECTION SYNCHRO WORKSHEETS BUILD-OUT CONDITIONS

	۶	\rightarrow	7	•	←	*	4	†	1	\	↓	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBF
Lane Configurations	7	^			ተተ	7	*5		7"			
Traffic Volume (veh/h)	175	275	0	0	356	47	345	0	128	0	0	0
Future Volume (veh/h)	175	275	0	0	356	47	345	0	128	0	0	0
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Work Zone On Approach		No			No			No				
Adj Sat Flow, veh/h/ln	1811	1870	0	0	1870	1826	1752	0	1811			
Adj Flow Rate, veh/h	192	302	0	0	391	0	379	0	0			
Peak Hour Factor	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91			
Percent Heavy Veh, %	6	2	0	0	2	5	10	0	6			
Cap, veh/h	554	1015	0	0	1092		441	0				
Arrive On Green	0.14	0.54	0.00	0.00	0.31	0.00	0.26	0.00	0.00			
Sat Flow, veh/h	1725	1870	0	0	3647	1547	1668	0	1535			
Grp Volume(v), veh/h	192	302	0	0	391	0	379	0	0			
Grp Sat Flow(s), veh/h/ln	1725	1870	0	0	1777	1547	1668	0	1535			
Q Serve(g_s), s	4.6	6.2	0.0	0.0	6.0	0.0	15.2	0.0	0.0			
Cycle Q Clear(g_c), s	4.6	6.2	0.0	0.0	6.0	0.0	15.2	0.0	0.0			
Prop In Lane	1.00	0.2	0.00	0.00	0.0	1.00	1.00	0.0	1.00			
Lane Grp Cap(c), veh/h	554	1015	0.00	0.00	1092	1.00	441	0	1.00			
V/C Ratio(X)	0.35	0.30	0.00	0.00	0.36		0.86	0.00				
Avail Cap(c_a), veh/h	761	1015	0.00	0.00	1928							
HCM Platoon Ratio	1.00	1.00	1.00	1.00		4.00	787	0	4.00			
					1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	1.00	1.00	0.00	0.00	1.00	0.00	1.00	0.00	0.00			
Uniform Delay (d), s/veh	11.5	8.8	0.0	0.0	19.0	0.0	24.7	0.0	0.0			
Incr Delay (d2), s/veh	0.4	0.8	0.0	0.0	0.2	0.0	5.9	0.0	0.0			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(50%),veh/ln	1.7	2.4	0.0	0.0	2.4	0.0	6.4	0.0	0.0			
Unsig. Movement Delay, s/veh			2.2		10 5	2.02	2100	1272	1010			
LnGrp Delay(d),s/veh	12.0	9.5	0.0	0.0	19.2	0.0	30.6	0.0	0.0			
LnGrp LOS	В	A	A	Α	В		С	Α				
Approach Vol, veh/h		494			391	Α		379	Α			
Approach Delay, s/veh		10.5			19.2			30.6				
Approach LOS		В			В			С				
Timer - Assigned Phs	The state of	2		Total P	5	6	17.2	8	- 5			- 10
Phs Duration (G+Y+Rc), s		45.0			16.6	28.4		25.4			1 1 1	
Change Period (Y+Rc), s		6.8			6.8	6.8		6.8				
Max Green Setting (Gmax), s	1	38.2			18.2	38.2		33.2				
Max Q Clear Time (q_c+l1), s		8.2			6.6	8.0		17.2				
Green Ext Time (p_c), s		2.3			0.5	3.3		1.4				
Intersection Summary				Service S	o white	No Est		-11		5 53 p		8.7
HCM 6th Ctrl Delay			19.2			11170						
HCM 6th LOS			В									
Notes	I E Sur	0.000	100 E G	ga - i all	- 11	May 10		Secretary of		SAN TAX		

Unsignalized Delay for [NBR, WBR] is excluded from calculations of the approach delay and intersection delay.

	۶	-	•	•	-	•	4	†	-	-	ļ	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Ŋ	^			^	7	ሻ		74			
Traffic Volume (veh/h)	161	246	0	0	532	47	520	0	267	0	0	0
Future Volume (veh/h)	161	246	0	0	532	47	520	0	267	0	0	0
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0		A 18	
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Work Zone On Approach		No			No			No				
Adj Sat Flow, veh/h/ln	1870	1870	0	0	1870	1856	1841	0	1870			
Adj Flow Rate, veh/h	169	259	0	0	560	0	547	0	0			
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95			
Percent Heavy Veh, %	2	2	0	0	2	3	4	0	2			
Cap, veh/h	430	906	0	0	976		601	0				
Arrive On Green	0.12	0.48	0.00	0.00	0.27	0.00	0.34	0.00	0.00			
Sat Flow, veh/h	1781	1870	0	0	3647	1572	1753	0	1585			
Grp Volume(v), veh/h	169	259	0	0	560	0	547	0	0			
Grp Sat Flow(s),veh/h/ln	1781	1870	0	0	1777	1572	1753	0	1585			
Q Serve(g_s), s	4.8	6.5	0.0	0.0	10.7	0.0	23.5	0.0	0.0			
Cycle Q Clear(g_c), s	4.8	6.5	0.0	0.0	10.7	0.0	23.5	0.0	0.0			
Prop In Lane	1.00	0.0	0.00	0.00	10.7	1.00	1.00	0.0	1.00			
Lane Grp Cap(c), veh/h	430	906	0.00	0.00	976	1.00	601	0	1.00			
V/C Ratio(X)	0.39	0.29	0.00	0.00	0.57		0.91	0.00				
Avail Cap(c_a), veh/h	620	906	0.00	0.00	1722		738					
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1,00			
Upstream Filter(I)	1.00	1.00	0.00		1.00							
Uniform Delay (d), s/veh	15.7	12.2	0.00	0.00		0.00	1.00	0.00	0.00			
	0.7			0.0	24.6	0.0	24.7	0.0	0.0			
Incr Delay (d2), s/veh		0.8	0.0	0.0	0.6	0.0	13.9	0.0	0.0			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(50%),veh/ln	1.9	2.7	0.0	0.0	4.4	0.0	11.4	0.0	0.0			
Unsig. Movement Delay, s/veh		40.0						202				
LnGrp Delay(d),s/veh	16.5	13.0	0.0	0.0	25.3	0.0	38.6	0.0	0.0			
LnGrp LOS	В	В	A	A	C		D	A				
Approach Vol, veh/h		428			560	Α		547	Α			
Approach Delay, s/veh		14.3			25.3			38.6				
Approach LOS		В			С			D				
Timer - Assigned Phs		2		- 700	5	6	1 S	8	VI 150	HIGH	43 VI	
Phs Duration (G+Y+Rc), s	500	45.0			16.6	28.4	47.1	33.8				
Change Period (Y+Rc), s		6.8			6.8	6.8		6.8				
Max Green Setting (Gmax), s		38.2			18.2	38.2		33.2				
Max Q Clear Time (g_c+l1), s		8.5			6.8	12.7		25.5				
Green Ext Time (p_c), s		1.9			0.4	4.8		1.6				
Intersection Summary	10.30	100	1 20-0-1	13-0	1 22	N. E.	100	STIPLIO			S Suprem	5
HCM 6th Ctrl Delay			27.0		1	-						-
HCM 6th LOS			C									
HCM 6th LOS Notes	24 .180	1636	C	130 10	NI SOLO	- (A)	0.02	T 200	ATT 25	- // L =		

Unsignalized Delay for [NBR, WBR] is excluded from calculations of the approach delay and intersection delay.

	۶	→	*	•	←	4	4	1	~	1	ţ	√
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ř	₽		ሻ	1→			4			4	
Traffic Volume (veh/h)	11	350	73	39	406	11	92	2	42	15	6	30
Future Volume (veh/h)	11	350	73	39	406	11	92	2	42	15	6	30
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1841	1841	1811	1841	1841	1159	1159	1159	1870	1870	1870
Adj Flow Rate, veh/h	13	412	86	46	478	13	108	2	49	18	7	35
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Percent Heavy Veh, %	2	4	4	6	4	4	50	50	50	2	2	2
Cap, veh/h	412	693	145	405	883	24	200	12	56	135	69	193
Arrive On Green	0.02	0.47	0.47	0.04	0.50	0.50	0.20	0.20	0.20	0.20	0.20	0.20
Sat Flow, veh/h	1781	1477	308	1725	1783	49	574	63	284	345	352	976
Grp Volume(v), veh/h	13	0	498	46	0	491	159	0	0	60	0	0
Grp Sat Flow(s),veh/h/ln	1781	0	1785	1725	0	1832	920	0	0	1673	0	0
Q Serve(g_s), s	0.3	0.0	14.4	0.9	0.0	12.9	9.6	0.0	0.0	0.0	0.0	0.0
Cycle Q Clear(g_c), s	0.3	0.0	14.4	0.9	0.0	12.9	11.6	0.0	0.0	2.1	0.0	0.0
Prop In Lane	1.00		0.17	1.00		0.03	0.68		0.31	0.30		0.58
Lane Grp Cap(c), veh/h	412	0	837	405	0	907	268	0	0	397	0	0
V/C Ratio(X)	0.03	0.00	0.59	0.11	0.00	0.54	0.59	0.00	0.00	0.15	0.00	0.00
Avail Cap(c_a), veh/h	511	0	837	456	0	907	298	0	0	449	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	10.2	0.0	13.7	10.1	0.0	12.2	27.0	0.0	0.0	23.4	0.0	0.0
Incr Delay (d2), s/veh	0.0	0.0	3.1	0.1	0.0	2.3	2.6	0.0	0.0	0.2	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	0.1	0.0	5.4	0.3	0.0	4.8	2.5	0.0	0.0	0.8	0.0	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	10.3	0.0	16.8	10.3	0.0	14.5	29.6	0.0	0.0	23.6	0.0	0.0
LnGrp LOS	В	Α	В	В	Α	В	С	Α	Α	С	Α	Α
Approach Vol, veh/h		511			537			159			60	
Approach Delay, s/veh		16.6			14.1			29.6			23.6	
Approach LOS		В			В			С			С	
Timer - Assigned Phs	1	2	ten gan	4	5	6		8	10517 St	- 77		37 TE
Phs Duration (G+Y+Rc), s	7.9	41.5		20.6	9.8	39.6		20.6				
Change Period (Y+Rc), s	6.8	6.8		6.8	6.8	6.8		6.8				
Max Green Setting (Gmax), s	5.0	28.4		16.2	5.0	28.4		16.2				
Max Q Clear Time (g_c+l1), s	2.3	14.9		13.6	2.9	16.4		4.1				
Green Ext Time (p_c), s	0.0	2.3		0.2	0.0	2.3		0.2				
Intersection Summary	0 == 188	ES INT	Ball	15 3	18	HA E	1 27 3	Polymer II	11/31	UF 680 18		215
HCM 6th Ctrl Delay			17.5									
HCM 6th LOS			В									

	۶	-	*	•	+	1	1	†	~	-	↓	4
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	1>		Y	-1}			€\$			€}-	
Traffic Volume (veh/h)	20	443	118	42	413	23	86	10	42	22	5	20
Future Volume (veh/h)	20	443	118	42	413	23	86	10	42	22	5	20
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	21	471	126	45	439	24	91	11	45	23	5	21
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	567	832	222	472	1056	58	181	21	57	138	42	86
Arrive On Green	0.02	0.59	0.59	0.04	0.60	0.60	0.12	0.12	0.12	0.12	0.12	0.12
Sat Flow, veh/h	1781	1422	380	1781	1757	96	894	175	472	596	351	711
Grp Volume(v), veh/h	21	0	597	45	0	463	147	0	0	49	0	0
Grp Sat Flow(s), veh/h/ln	1781	0	1802	1781	0	1853	1541	0	0	1658	0	0
Q Serve(g_s), s	0.4	0.0	16.4	0.8	0,0	10.6	5.3	0.0	0.0	0.0	0.0	0.0
Cycle Q Clear(g_c), s	0.4	0.0	16.4	0.8	0.0	10.6	7.3	0.0	0.0	2.0	0.0	0.0
Prop In Lane	1.00		0.21	1.00		0.05	0.62		0.31	0.47		0.43
Lane Grp Cap(c), veh/h	567	0	1054	472	0	1114	258	0	0	266	0	0
V/C Ratio(X)	0.04	0.00	0.57	0.10	0.00	0.42	0.57	0.00	0.00	0.18	0.00	0.00
Avail Cap(c_a), veh/h	637	0	1054	513	0	1114	379	0	0	388	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	6.8	0.0	10.3	7.6	0.0	8.5	34.0	0.0	0.0	31.8	0.0	0.0
Incr Delay (d2), s/veh	0.0	0.0	2.2	0.1	0.0	1.1	2.0	0.0	0.0	0.3	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	0.1	0.0	5.7	0.2	0.0	3.6	2.7	0.0	0.0	0.9	0.0	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	6.8	0.0	12.5	7.7	0.0	9.6	36.0	0.0	0.0	32.2	0.0	0.0
LnGrp LOS	Α	Α	В	Α	Α	Α	D	Α	Α	С	Α	Α
Approach Vol, veh/h		618			508			147			49	
Approach Delay, s/veh		12.3			9.4			36.0			32.2	
Approach LOS		В			Α			D			С	
Timer - Assigned Phs	1	2	P. H.	4	5	6	31 3	8	R.C.SA	350		0.389
Phs Duration (G+Y+Rc), s	8.7	54.9		16.4	10.0	53.6		16.4				
Change Period (Y+Rc), s	6.8	6.8		6.8	6.8	6.8		6.8				
Max Green Setting (Gmax), s	5.0	38.4		16.2	5.0	38.4		16.2				
Max Q Clear Time (g_c+l1), s	2.4	12.6		9.3	2.8	18.4		4.0				
Green Ext Time (p_c), s	0.0	2.7		0.3	0.0	3.6		0.1				
Intersection Summary	11.55	7630	Sec.	5000		176348			75 SATE	Water !	P. O. Y	Pro di
HCM 6th Ctrl Delay			14.6				118					
HCM 6th LOS			В									

APPENDIX K NCHRP 457 WORKSHEETS

Left Turn Lane Analysis at Driveway (AM Peak-Hour)

Figure 2 - 5. Guideline for determining the need for a major-road left-turn bay at a two-way stop-controlled intersection.


2-lane roadway (English)

INPUT

Variable	Value
85 th percentile speed, mph:	45
Percent of left-turns in advancing volume (V _A), %:	18%
Advancing volume (V _A), veh/h:	570
Opposing volume (Vo), veh/h:	570

OUTPUT

Variable	Value
Limiting advancing volume (V _A), veh/h:	225
Guidance for determining the need for a major-road	left-turn bay:
Left-turn treatment warrante	d.

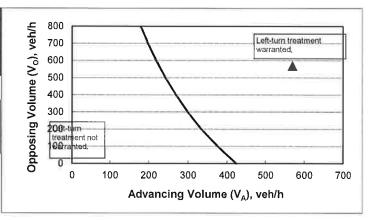

CALIBRATION CONSTANTS

Variable	Value
Average time for making left-turn, s:	3.0
Critical headway, s:	5.0
Average time for left-turn vehicle to clear the advancing lane, s:	1.9


Left Turn Lane Analysis at Driveway (PM Peak-Hour)

Figure 2 - 5. Guideline for determining the need for a major-road left-turn bay at a two-way stop-controlled intersection.

2-lane roadway (English) INPUT

Variable	Value
85 th percentile speed, mph:	45
Percent of left-turns in advancing volume (V _A), %:	16%
Advancing volume (V _A), veh/h:	530
Opposing volume (Vo), veh/h:	856

OUTPUT	
Variable	Value
Limiting advancing volume (V _A), veh/h:	178
Guidance for determining the need for a major-road	l left-turn bay:
Left-turn treatment warrante	

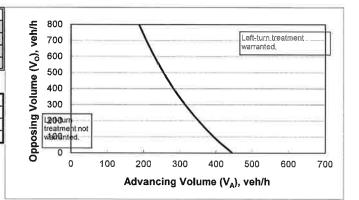

CALIBRATION CONSTANTS


Variable	Value
Average time for making left-turn, s:	3.0
Critical headway, s:	5.0
Average time for left-turn vehicle to clear the advancing lane, s:	1.9

Right Turn Lane Analysis at Driveway (AM Peak-Hour)

Figure 2 - 6. Guideline for determining the need for a major-road right-turn bay at a two-way stop-controlled intersection.

Roadway geometry:	2-lane roadv	ay
Variable		alue
Major-road speed, mph:		45
Major-road volume (one direction), veh/h:		570
Right-tum volume, veh/h:	11.7	340

Variable	Value
Limiting right-turn volume, veh/h:	34
Guidance for determining the need for a major-ro right-turn bay for a 2-lane roadway:	ad
Add right-turn bay.	



Right Turn Lane Analysis at Driveway (PM Peak-Hour)

Figure 2 - 6. Guideline for determining the need for a major-road right-turn bay at a two-way stop-controlled intersection.

Roadway geometry:	2-lane roadway
Variable	Valu
Major-road speed, mph:	45
Major-road volume (one direction), veh/h:	85
Right-turn volume, veh/h;	28:

Variable	Value
Limiting right-turn volume, veh/h:	16
Guidance for determining the need for a major-ro right-turn bay for a 2-lane roadway:	ad
Add right-turn bay.	




EXHIBIT L

SIGNALIZED INTERSECTION SYNCHRO WORKSHEETS - ULTIMATE BUILD-OUT CONDITIONS

	۶	→	*	•	4-	*	1	†	1	1	+	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	₽		ሻ	^	7		4		Ĭ,	\$	
Traffic Volume (veh/h)	109	435	31	91	142	358	20	11	147	377	9	79
Future Volume (veh/h)	109	435	31	91	142	358	20	11	147	377	9	79
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1841	1841	1767	1856	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	116	463	33	97	151	381	21	12	156	401	10	84
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	2	4	4	9	3	2	2	2	2	2	2	2
Cap, veh/h	506	695	50	354	759	648	134	71	459	666	60	501
Arrive On Green	0.41	0.41	0.41	0.41	0.41	0.41	0.35	0.35	0.35	0.35	0.35	0.35
Sat Flow, veh/h	872	1698	121	851	1856	1585	76	204	1320	1217	171	1440
Grp Volume(v), veh/h	116	0	496	97	151	381	189	0	0	401	0	94
Grp Sat Flow(s),veh/h/ln	872	0	1819	851	1856	1585	1600	0	0	1217	0	1611
Q Serve(g_s), s	3.7	0.0	8.2	3.9	1.9	6.9	0.0	0.0	0.0	6.5	0.0	1.5
Cycle Q Clear(g_c), s	5.6	0.0	8.2	12.1	1.9	6.9	3.2	0.0	0.0	9.7	0.0	1.5
Prop In Lane	1.00		0.07	1.00		1.00	0.11		0.83	1.00		0.89
Lane Grp Cap(c), veh/h	506	0	744	354	759	648	664	0	0	666	0	560
V/C Ratio(X)	0.23	0.00	0.67	0.27	0.20	0.59	0.28	0.00	0.00	0.60	0.00	0.17
Avail Cap(c_a), veh/h	573	0	884	420	902	771	881	0	0	835	0	783
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	8.8	0.0	8.9	13.8	7.0	8.5	8.9	0.0	0.0	10.6	0.0	8.4
Incr Delay (d2), s/veh	0.2	0.0	1.5	0.4	0.1	0.9	0.2	0.0	0.0	0.9	0.0	0.1
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.8	0.0	3.6	1.0	0.8	2.5	1.6	0.0	0.0	4.0	0.0	0.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	9.1	0.0	10.4	14.2	7.2	9.4	9.1	0.0	0.0	11.5	0.0	8.5
LnGrp LOS	Α	Α	В	В	Α	Α	Α	Α	Α	В	Α	Α
Approach Vol, veh/h		612			629			189			495	
Approach Delay, s/veh		10.1			9.6			9.1			10.9	
Approach LOS		В			Α			A			В	* -
Timer - Assigned Phs	E Suite	2	Part of	4		6		8	E PORT	15 - 17	SHE	L 100
Phs Duration (G+Y+Rc), s		17.4		19.6		17.4		19.6				
Change Period (Y+Rc), s		4.5		4.5		4.5		4.5				
Max Green Setting (Gmax), s		18.0		18.0		18.0		18.0				
Max Q Clear Time (g_c+l1), s		5.2		10.2		11.7		14.1				
Green Ext Time (p_c), s		0.9		2.2		1.2		1.1				
Intersection Summary	7	A. 18	194.10	**************************************	11,000	3117129		4		10/5-123		
HCM 6th Ctrl Delay		* 500	10.1					1 4 4 4				
HCM 6th LOS			В									

	۶	-	*	•	←	4	1	†	1	-	ļ	1
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ኻ	Դ		ሻ	^	₹.		4		19	f}	
Traffic Volume (veh/h)	89	394	51	155	421	294	27	10	63	312	9	68
Future Volume (veh/h)	89	394	51	155	421	294	27	10	63	312	9	68
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	97	428	55	168	458	320	29	11	68	339	10	74
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	387	735	94	430	847	718	198	104	302	617	58	430
Arrive On Green	0.45	0.45	0.45	0.45	0.45	0.45	0.30	0.30	0.30	0.30	0.30	0.30
Sat Flow, veh/h	694	1624	209	912	1870	1585	244	344	999	1320	192	1422
Grp Volume(v), veh/h	97	0	483	168	458	320	108	0	0	339	0	84
Grp Sat Flow(s), veh/h/ln	694	0	1833	912	1870	1585	1587	0	- 0	1320	0	1614
Q Serve(g_s), s	4.3	0.0	7.2	6.2	6.5	5.1	0.0	0.0	0.0	6.3	0.0	1.4
Cycle Q Clear(g_c), s	10.8	0.0	7.2	13.3	6.5	5.1	1.8	0.0	0.0	8.0	0.0	1.4
Prop In Lane	1.00		0.11	1.00		1.00	0.27		0.63	1.00		0.88
Lane Grp Cap(c), veh/h	387	0	830	430	847	718	604	0	0	617	- 0	488
V/C Ratio(X)	0.25	0.00	0.58	0.39	0.54	0.45	0.18	0.00	0.00	0.55	0.00	0.17
Avail Cap(c_a), veh/h	413	0	899	465	917	777	891	0	0	865	0	792
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	11.2	0.0	7.5	12.4	7.3	6.9	9.6	0.0	0.0	11.5	0.0	9.4
Incr Delay (d2), s/veh	0.3	0.0	0.8	0.6	0.5	0.4	0.1	0.0	0.0	0.8	0.0	0.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%), veh/ln	0.8	0.0	2.7	1.6	2.4	1.6	0.9	0.0	0.0	3.6	0.0	0.7
Unsig. Movement Delay, s/veh							0,10	0.0	0.0	0.0	0.0	0
LnGrp Delay(d),s/veh	11.5	0.0	8.3	13.0	7.8	7.3	9.7	0.0	0.0	12.3	0.0	9.6
LnGrp LOS	В	Α	Α	В	A	Α	Α	Α	Α	В	Α	А
Approach Vol, veh/h		580		21.	946			108			423	
Approach Delay, s/veh		8.8			8.6			9.7			11.8	
Approach LOS		Α			Α			Α			В	
Timer - Assigned Phs	8,51	2	nt-se	4	y=q ,	6	1 - 1	8	-376	1000	7 31 5	
Phs Duration (G+Y+Rc), s		15.6		21.1		15.6		21,1				111111
Change Period (Y+Rc), s		4.5		4.5		4.5		4.5				
Max Green Setting (Gmax), s		18.0		18.0		18.0		18.0				
Max Q Clear Time (g_c+I1), s		3.8		12.8		10.0		15.3				
Green Ext Time (p_c), s		0.4		1.6		1.1		1.3				
Intersection Summary	E 5-3		1000	J-100	18 TO 1	Law Sec. I	W 8 1	STATE.	ni da		er ler	200
HCM 6th Ctrl Delay			9.4	-								
HCM 6th LOS			A									

PLANNING AND ZONING BOARD MINUTES

The Brevard County Planning & Zoning Board met in regular session on **Monday, February 11**, **2019**, at **3:00 p.m**., in the Commission Room, Building C, Brevard County Government Center, 2725 Judge Fran Jamieson Way, Viera, Florida.

The meeting was called to order by the Chair, Henry Minneboo, at 3:00 p.m.

Board members present were: Henry Minneboo, Chair; Ron Bartcher, Rochelle Lawandales, Brian Hodgers, Ben Glover; Ron McLellan; Peter Filiberto; and Dane Theodore.

Staff members present were: Erin Sterk, Planning and Zoning Manager; Jad Brewer, Assistant County Attorney; Paul Body, Planner II; and Jennifer Jones, Special Projects Coordinator II.

Henry Minneboo, Chair, announced that the Board of County Commissioners will have the final vote on the recommendations made by the Planning and Zoning Board on Thursday, March 7, 2019, at 5:00 p.m.

Excerpt from complete agenda

John L. Jackson, Trustee – (Bruce Moia):

A Small Scale Comprehensive Plan Amendment from NC (Neighborhood Commercial) and CC (Community Commercial) to all CC. The property is 3.28 acres, located on the north side of State Road 46, approximately 0.2 miles west of the Interstate 95 and State Road 46 interchange. (No assigned address. In the Mims area.) (18PZ00160) (District 1)

John L. Jackson, Trustee – (Bruce Moia):

A change of zoning classification from GU (General Use), BU-1 (General Retail Commercial), and BU-2 (Retail, Warehousing, and Wholesale Commercial) to all BU-2. The property is 16.4 acres, located on the north side of State Road 46, approximately 0.2 miles west of the Interstate 95 and State Road 46 interchange. (No assigned address. In the Mims area.) (18PZ00162) (District 1)

Bruce Moia – My name is Bruce Moia, I'm the President of MBV Engineering, representing the applicant. What we have before you today is approximately a 16-acre parcel of land located on the north side of State Road 46, just west of the I-95 interchange. What we're proposing is a truck stop with a convenience store, truck and trailer parking, tire care center, and a fast-food restaurant. There is a demand there for this use; it's a stop for truckers, a place where they can rest, get something to eat, and fuel up and get back on the road. There's also an outparcel that we're hoping to do a proposed hotel on in the future, but for right now Love's wants to put a truck stop there. The project has three different zonings and two different land uses, so we want to consolidate that and make it consistent and do all Community Commercial for allowable uses, and then rezone it to BU-2 (Retail, Warehousing, and Wholesale Commercial). We have had a traffic study done, because this is a \$14 million investment, probably \$500,000 in diesel taxes that will be available to the County on an annual basis, so we think there's a real benefit to this project. The traffic study shows there will need to be a signal at Carpenter Road and State Road 46; it will also require a westbound right turn lane, and eastbound left turn lane, so it will be quite an improvement to the intersection of Carpenter Road and State Road 46. It will create more capacity and be easier for vehicles to get in and out of that intersection. We will be coordinating with the FDOT (Florida Department of Transportation). Not to burden the roadway, we have entered into a binding development plan so we're limiting our floor areas so that we're not blowing out the road, we're limiting it to just what we need. We're hoping to get your approval and I am here to answer any questions.

Henry Minneboo - What's the total acreage?

P&Z Minutes February 11, 2019 Page 2

Bruce Moia – About 16.1, but it's a smaller piece of 134 acre property that is owned by the applicant.

Ron McLellan – That's a perfect place for that truck stop.

Rochelle Lawandales - It absolutely is.

Peter Filiberto – There's only a few Love's truck stops around the state.

Bruce Moia – The closest one north is in Daytona Beach, and south is Fort Pierce.

Public comment:

William Park – I'm William Park and I am the real estate broker who represents the seller in this situation, and I live in Orlando, 3736 Lake Margaret Drive. As stated, the property is 134 acres overall. We believe the development of this travel plaza will be the catalyst that will attract other uses, which can include restaurants, as well as hotels, and we believe the existence of the travel plaza will help development in that area. According to the Mims Small Area Study, this property permits these more intense kinds of land uses. We know there is already a convenience store and gas station that this property will surround on two sides, so the use of selling fuel at this location is not something that will be new. We believe that in the future the rest of the property will probably be developed as residential uses that will be buffered from the commercial area.

Rochelle Lawandales - I'll move approval.

Brian Hodgers - Second.

Ron Bartcher – The Mims Small Area Study said this was an area that was to be developed, and in the Mims area we know that's going to happen, and we support this. The traffic study indicates that the proposed traffic signal is going to be fairly close to the intersection. You said you have not had discussions with the FDOT (Florida Department of Transportation) yet?

Bruce Moia – I haven't personally, but the traffic engineer has.

Ron Bartcher – What I would like, if possible, is for the results of the FDOT's review to be shared with this board. The reason is that as this develops, I think it's important that we as a board know what the DOT wants to do and what other things may happen on the other side of the interstate. We know there's going to be a real estate office over there and there may be other things happening over there. If there's any way you can share that with us that would be great.

Bruce Moia – Our engineer can answer that.

Tim Adkinson – Tim Adkinson, I'm from Jacksonville, 4639 Sugar Creek Drive. Bruce has been helping us work with the County. Along with the traffic engineer, we have met with FDOT and we could share all of those results. They've asked us to do some things and we're working through the numbers, but we can share all of that.

Henry Minneboo - You don't have to give us all of the traffic counts in the package.

Ron Bartcher – I'd like for staff to be sure that they share this with the TPO (Transportation Planning Organization), the fact that this development is happening now, because one of my goals is to try to

P&Z Minutes February 11, 2019 Page 3

get State Road 46 on the long-range plan, and this will help do that. Right now, State Road 46 is not in anybody's planning stages.

Erin Sterk – That's something that we recognized when going through the preliminary concurrency analysis. If you look at everything that has Community Commercial or Neighborhood Commercial, the road won't support it, so I think the planning of that road is significantly behind. They're doing that long-range transportation plan update now, so I hope to capture this corridor as one of the ones in there with future widening identified. We got the binding development plan which changed the limitation on uses, so are we getting a revised study and signal warrant that recognizes those figures before the Commission meeting?

Bruce Moia - Yes.

Henry Minneboo called for a vote on the motion as stated, and it passed unanimously.

I've read the rezoning request into the record, so you can make a motion.

Peter Filiberto – I'll make a motion to approve.

Ron McLellan - Second.

Peter Filiberto – With a binding development plan.

Henry Minneboo called for a vote on the motion as stated, and it passed unanimously.



Via email (tadkinson@adkinsoneng.com)

Ref: 4607.02

February 13, 2019

Timothy Adkinson, P.E., LEED AP ADKINSON ENGINEERING 6550 ST, Augustine Road, Suite 203 Jacksonville, FL 32217

Re:

Love's Travel Plaza TIS – Response to Comments Unincorporated Brevard County, FL

Dear Mr. Adkinson:

LTG, Inc. is in receipt of county's comments dated February 4th, 2019 regarding the Traffic Impact Study (TIS) developed for the proposed Love's Travel Plaza development. The county comments are presented below in plain text with our responses in **bold** text.

Comments Received from Brevard County, dated 2/4/19:

1.) Comment:

Utilize the "truck stop" (ITE 950) as the combined land use instead of the "convenience market/gas station", "fast food restaurant with drive through" and

"tire store" separate land uses.

Response:

The county has agreed to utilize the separate land uses instead of the "truck stop" (ITE 950). However, the convenience market/gas station and the fast food restaurant will consist of the maximum 10,300SF and 2,700SF

respectively.

2.) Comment:

Contact FDOT about signal spacing and driveway location, as that may affect

development potential.

Response:

Noted, the study will be submitted to FDOT as part of the driveway permit

application.

3.) Comment:

Cross-access to all adjacent parcels will be required, per Section 62-2957 of

Brevard County Code – please revise the Concept Plan to demonstrate how

interconnectivity to adjacent parcels will be provided.

Response:

Noted. This will be addressed by the site engineer.

4.) Comment:

If shared access to a signal through the subject property is proposed to be provided for the remainder of the parent parcel to the west and north of the subject area proposed for rezoning, the Traffic Impact Study should be revised

to examine these impacts.

Response:

Noted.

Timothy Adkinson, P.E., LEED AP February 13, 2019 Page 2

5.) Comment:

The TIS and Signal warrant will be reviewed for final approval at site

development.

Response:

Noted.

If you have any questions or comments, please feel free to call me at (386) 257-2571.

Sincerely, LTG, INC.

George Galan, PE Senior Project Manager From:

Sterk, Erin

To: Cc: Bruce M

Subject:

Gumm, Corrina; Jones, Jennifer Loves Traffic Ops Comments

Date:

Tuesday, February 26, 2019 6:00:28 PM

Bruce,

Please find documentation of the remaining concerns with the TIS and TSWS submitted. While these all may not need to be resolved now and will be further evaluated at site plan, this email serves as notification of the remaining concerns, in case the Board wishes to discuss them as part of the SSCPA or Rezoning request.

Original TIS/TSWS Submittal

The methodology for the TIS was not initially approved in advance by the Public Works Traffic Operations section, which recommends the following:

- 1. Utilize the "truck stop" (ITE 950) as the combined land use instead of the "convenience market/gas station", "fast
- 1. food restaurant with drive through" and "tire store" separate land uses.
- 2. Contact FDOT about signal spacing and driveway location, as that may affect development potential.
- 3. Cross access to all adjacent parcels will be required, per Section 622957 of Brevard County Code please revise the Concept Plan to demonstrate how interconnectivity to adjacent parcels will be provided.
- 4. If shared access to a signal through the subject property is proposed to be provided for the remainder of the parent parcel to the west and north of the subject area proposed for rezoning, the Traffic Impact Study should be revised to examine these impacts.
- 5. The Traffic Impact Study and Traffic Signal Warrant Study will be reviewed for final approval at site development.

Revised TIS/TSWS Submittal

The applicants revised the Traffic Impact Study and Traffic Signal Warrant Study, but did not utilize the combined Truck Stop land use code and chose to individually calculate internal capture between uses. Additionally, a significant portion of trips have been attributed to pass-by. While those trips are "passing by" on 195, the trips on SR 46 to access the site would be newly generated, as folks get off the interstate to visit the new service plaza/hotel. Stop land use code and chose to individually calculate internal capture between uses. Additionally, a significant portion of trips have been attributed to pass-by. While those trips are "passing by" on 195, the trips on SR 46 to access the site would be newly generated, as folks get off the interstate to visit the new service plaza/hotel.

Brevard County Traffic Operations continues to have some of the concerns not yet addressed above and the following comments:

- 1. The applicants should confirm with FDOT that the methodology, land use codes, internal capture and pass-by trip calculations meet their requirements.
- 2. Pass-by trips Please limit the pass-by trip percentage to 10 percent of the adjacent street traffic per FDOT's Transportation Site Impact Handbook.

3. Turn lane length – The analysis results in a turn lane length of 285'. Based on the proposed land use, there will be a high percentage of trucks traveling to this location. A turn lane length reduction will likely negatively impact the operational function of the intersection and roadway segment. The applicant should confirm that an insufficient turn lane length will be accepted by FDOT.

Please let me know if you have any questions,

Erin Sterk
Planning & Zoning Manager
Brevard County
(321) 633-2070 ext. 52640